


DESCHUTES COUNTY ROAD DEPARTMENT OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENT


DESCHUTES COUNTY
APRIL 2020

| | | |
|---|--|---|
| OWNER DESCHUTES COUNTY ROAD DEPARTMENT 61150 SE 27TH BEND, OR 97702 CONTACT: CODY SMITH PHONE: (541) 322-7113 (OFFICE) EMAIL: cody.smith@deschutes.org | ENGINEER PARAMETRIX 150 NW PACIFIC PARK LANE BEND, OREGON 97701 CONTACT: BARRY JOHNSON, P.E. PHONE: (541) 508-7710 EMAIL: bjohnson@parametrix.com | SURVEYOR PARAMETRIX 150 NW PACIFIC PARK LANE BEND, OR 97701 CONTACT: ANDREW HUSTON PHONE: (541) 508-7710 EMAIL: ahuston@parametrix.com |
|---|--|---|

| SHEET INDEX | | | | | |
|--------------|-------------------------------|--------------|----------------------------------|--------------|------------------------------|
| SHEET NUMBER | SHEET TITLE | SHEET NUMBER | SHEET TITLE | SHEET NUMBER | SHEET TITLE |
| C1.0 | COVER SHEET | C7.6 | NE FLOWLINE - PLAN & PROFILE | SS6 | CURVE SIGN & POST DATA TABLE |
| C1.1 | GENERAL NOTES | C7.7 | SW FLOWLINE - PLAN & PROFILE | SS7 | CURVE SIGN & POST DATA TABLE |
| C2.0 | TYPICAL SECTIONS | C7.8 | SE FLOWLINE - PLAN & PROFILE | SS8 | STRIPING PLAN |
| C2.1 | TYPICAL SECTIONS | C7.9 | CONSTRUCTION STAGING-STAGE ONE | SS9 | STRIPING PLAN |
| C3.0 | PAVING INDEX | C7.10 | CONSTRUCTION STAGING-STAGE TWO | SS10 | SIGNING PLAN |
| C4.0 | DETAILS | C7.11 | CONSTRUCTION STAGING-STAGE THREE | SS11 | SIGNING PLAN |
| C5.0 | EXISTING CONDITIONS/DEMO PLAN | C7.12 | CONSTRUCTION STAGING-STAGE FOUR | SS12 | CURVE SIGNING PLAN |
| C5.1 | EXISTING CONDITIONS/DEMO PLAN | C7.13 | CONSTRUCTION STAGING-STAGE FIVE | SS13 | CURVE SIGNING PLAN |
| C6.0 | GEOMETRY PLAN | C8.0 | EROSION & SEDIMENT CONTROL PLAN | SS14 | DETOUR PLAN STAGE 2 & 3 |
| C7.0 | WEST LEG PLAN & PROFILE | L1.0 | LANDSCAPING PLAN | SS15 | DETOUR PLAN STAGE 4 & 5 |
| C7.1 | EAST LEG PLAN & PROFILE | SS1 | SIGNING AND STRIPING LEGEND | IL1 | ILLUMINATION LEGEND |
| C7.2 | NORTH LEG PLAN & PROFILE | SS2 | EXISTING SIGN DETAILS | IL2 | ILLUMINATION PLAN |
| C7.3 | SOUTH LEG PLAN & PROFILE | SS3 | PROPOSED SIGN DETAILS | IL3 | ILLUMINATION PLAN |
| C7.4 | OUTER CIRCLE - PLAN & PROFILE | SS4 | SIGN & POST DATA TABLE | | |
| C7.5 | NW FLOWLINE - PLAN & PROFILE | SS5 | SIGN & POST DATA TABLE | | |

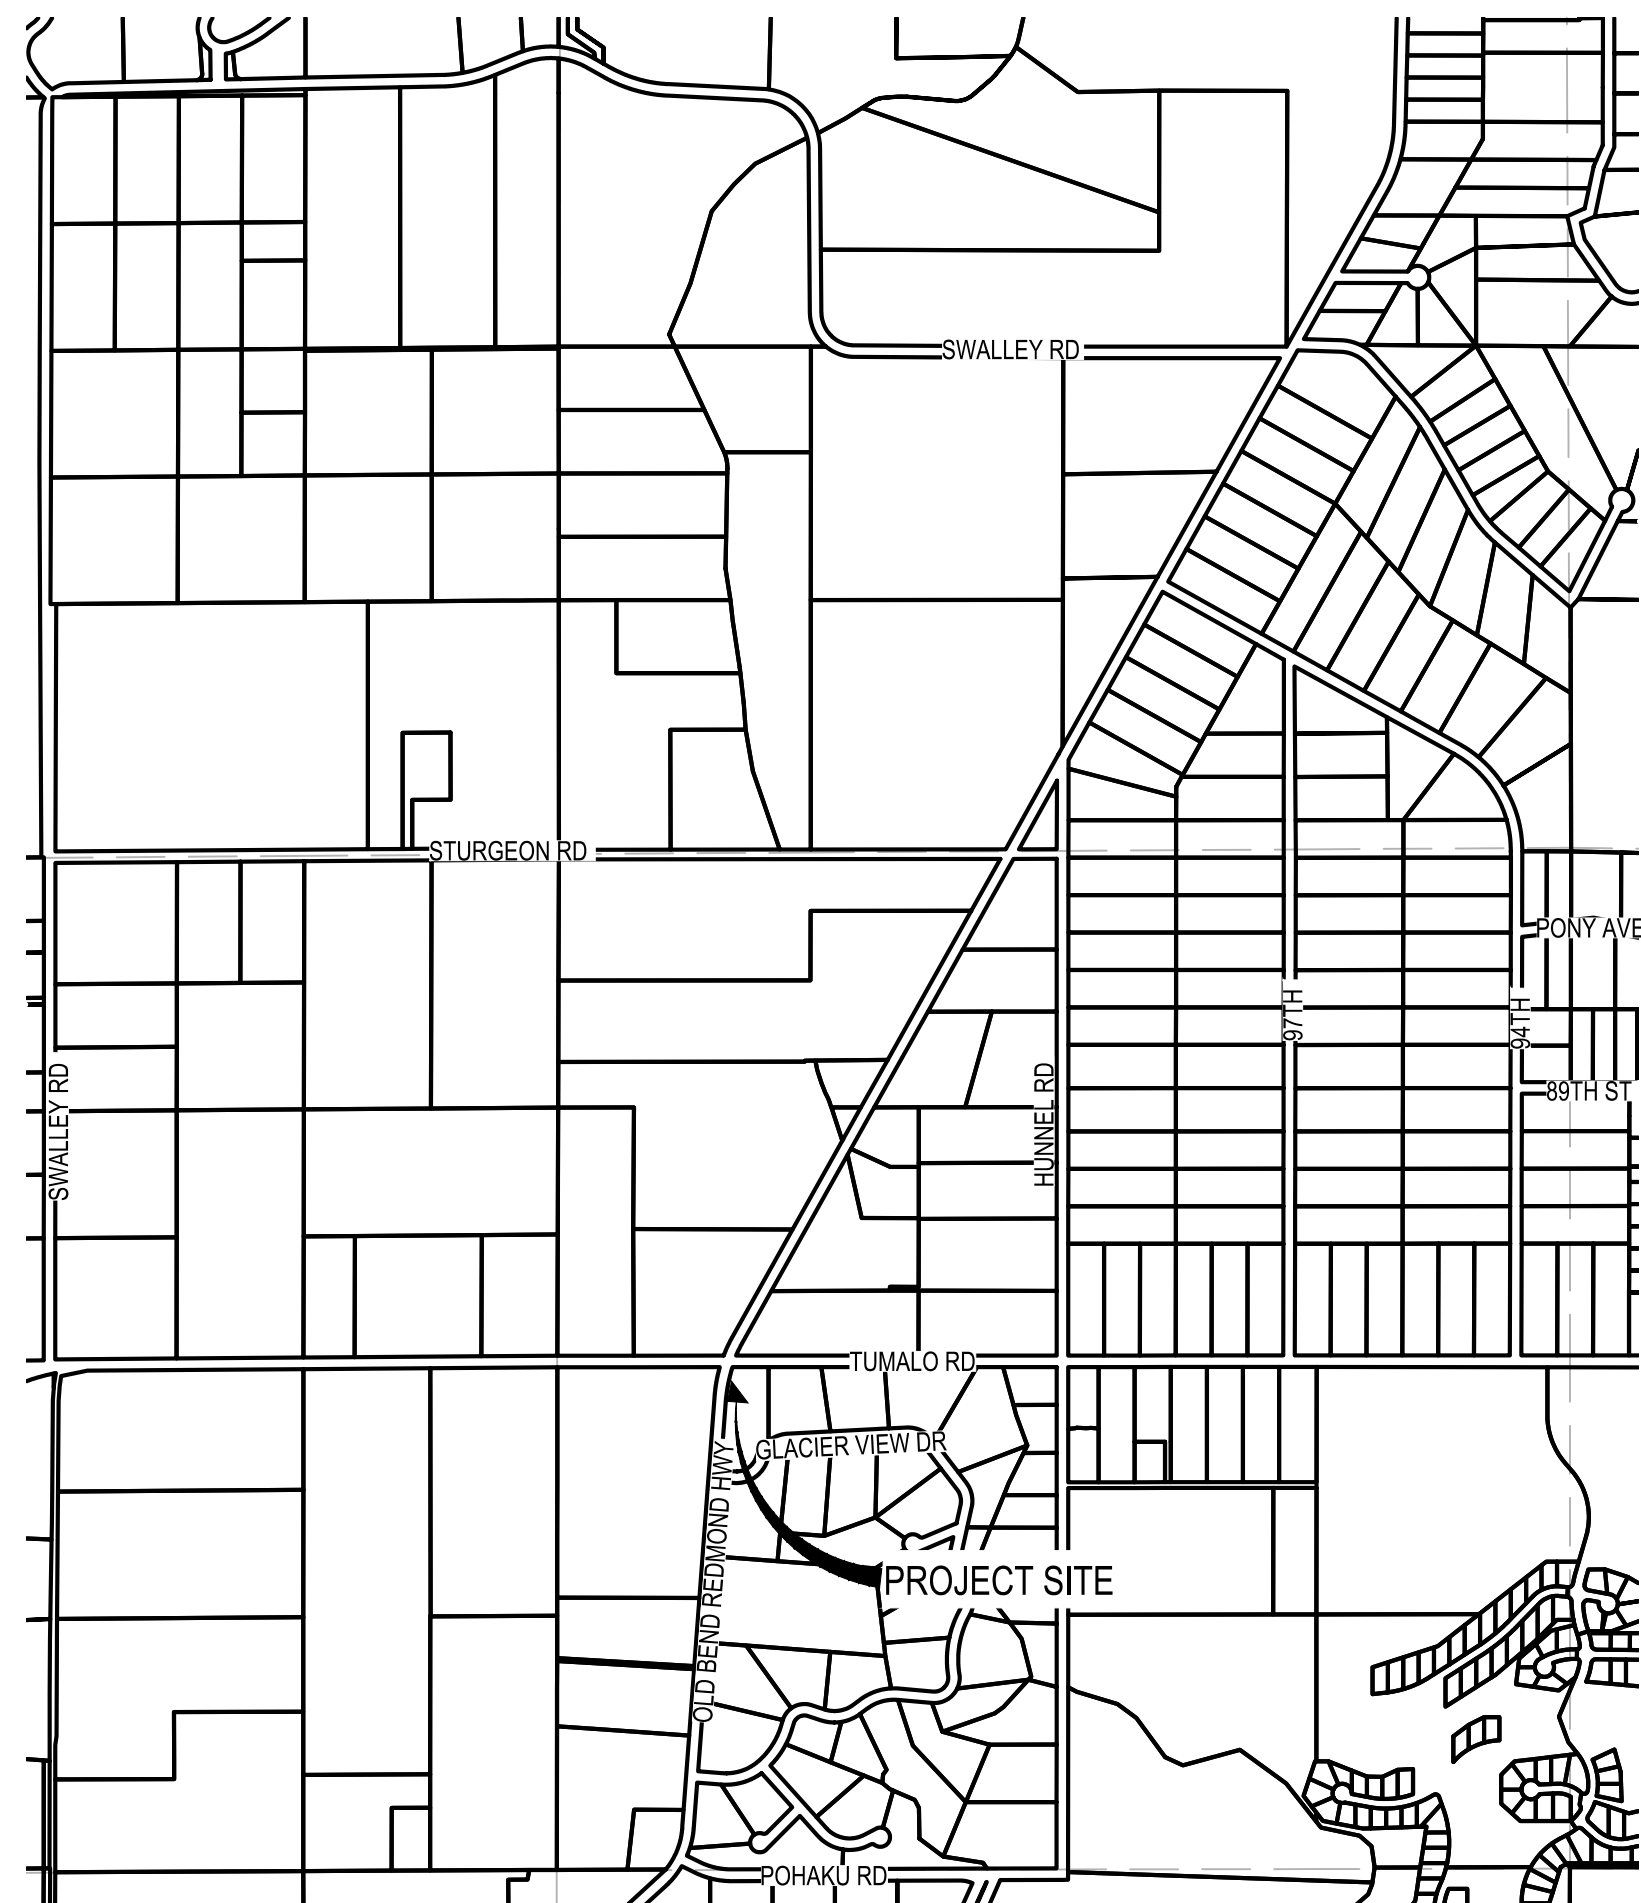

VICINITY MAP
1" = 1000'

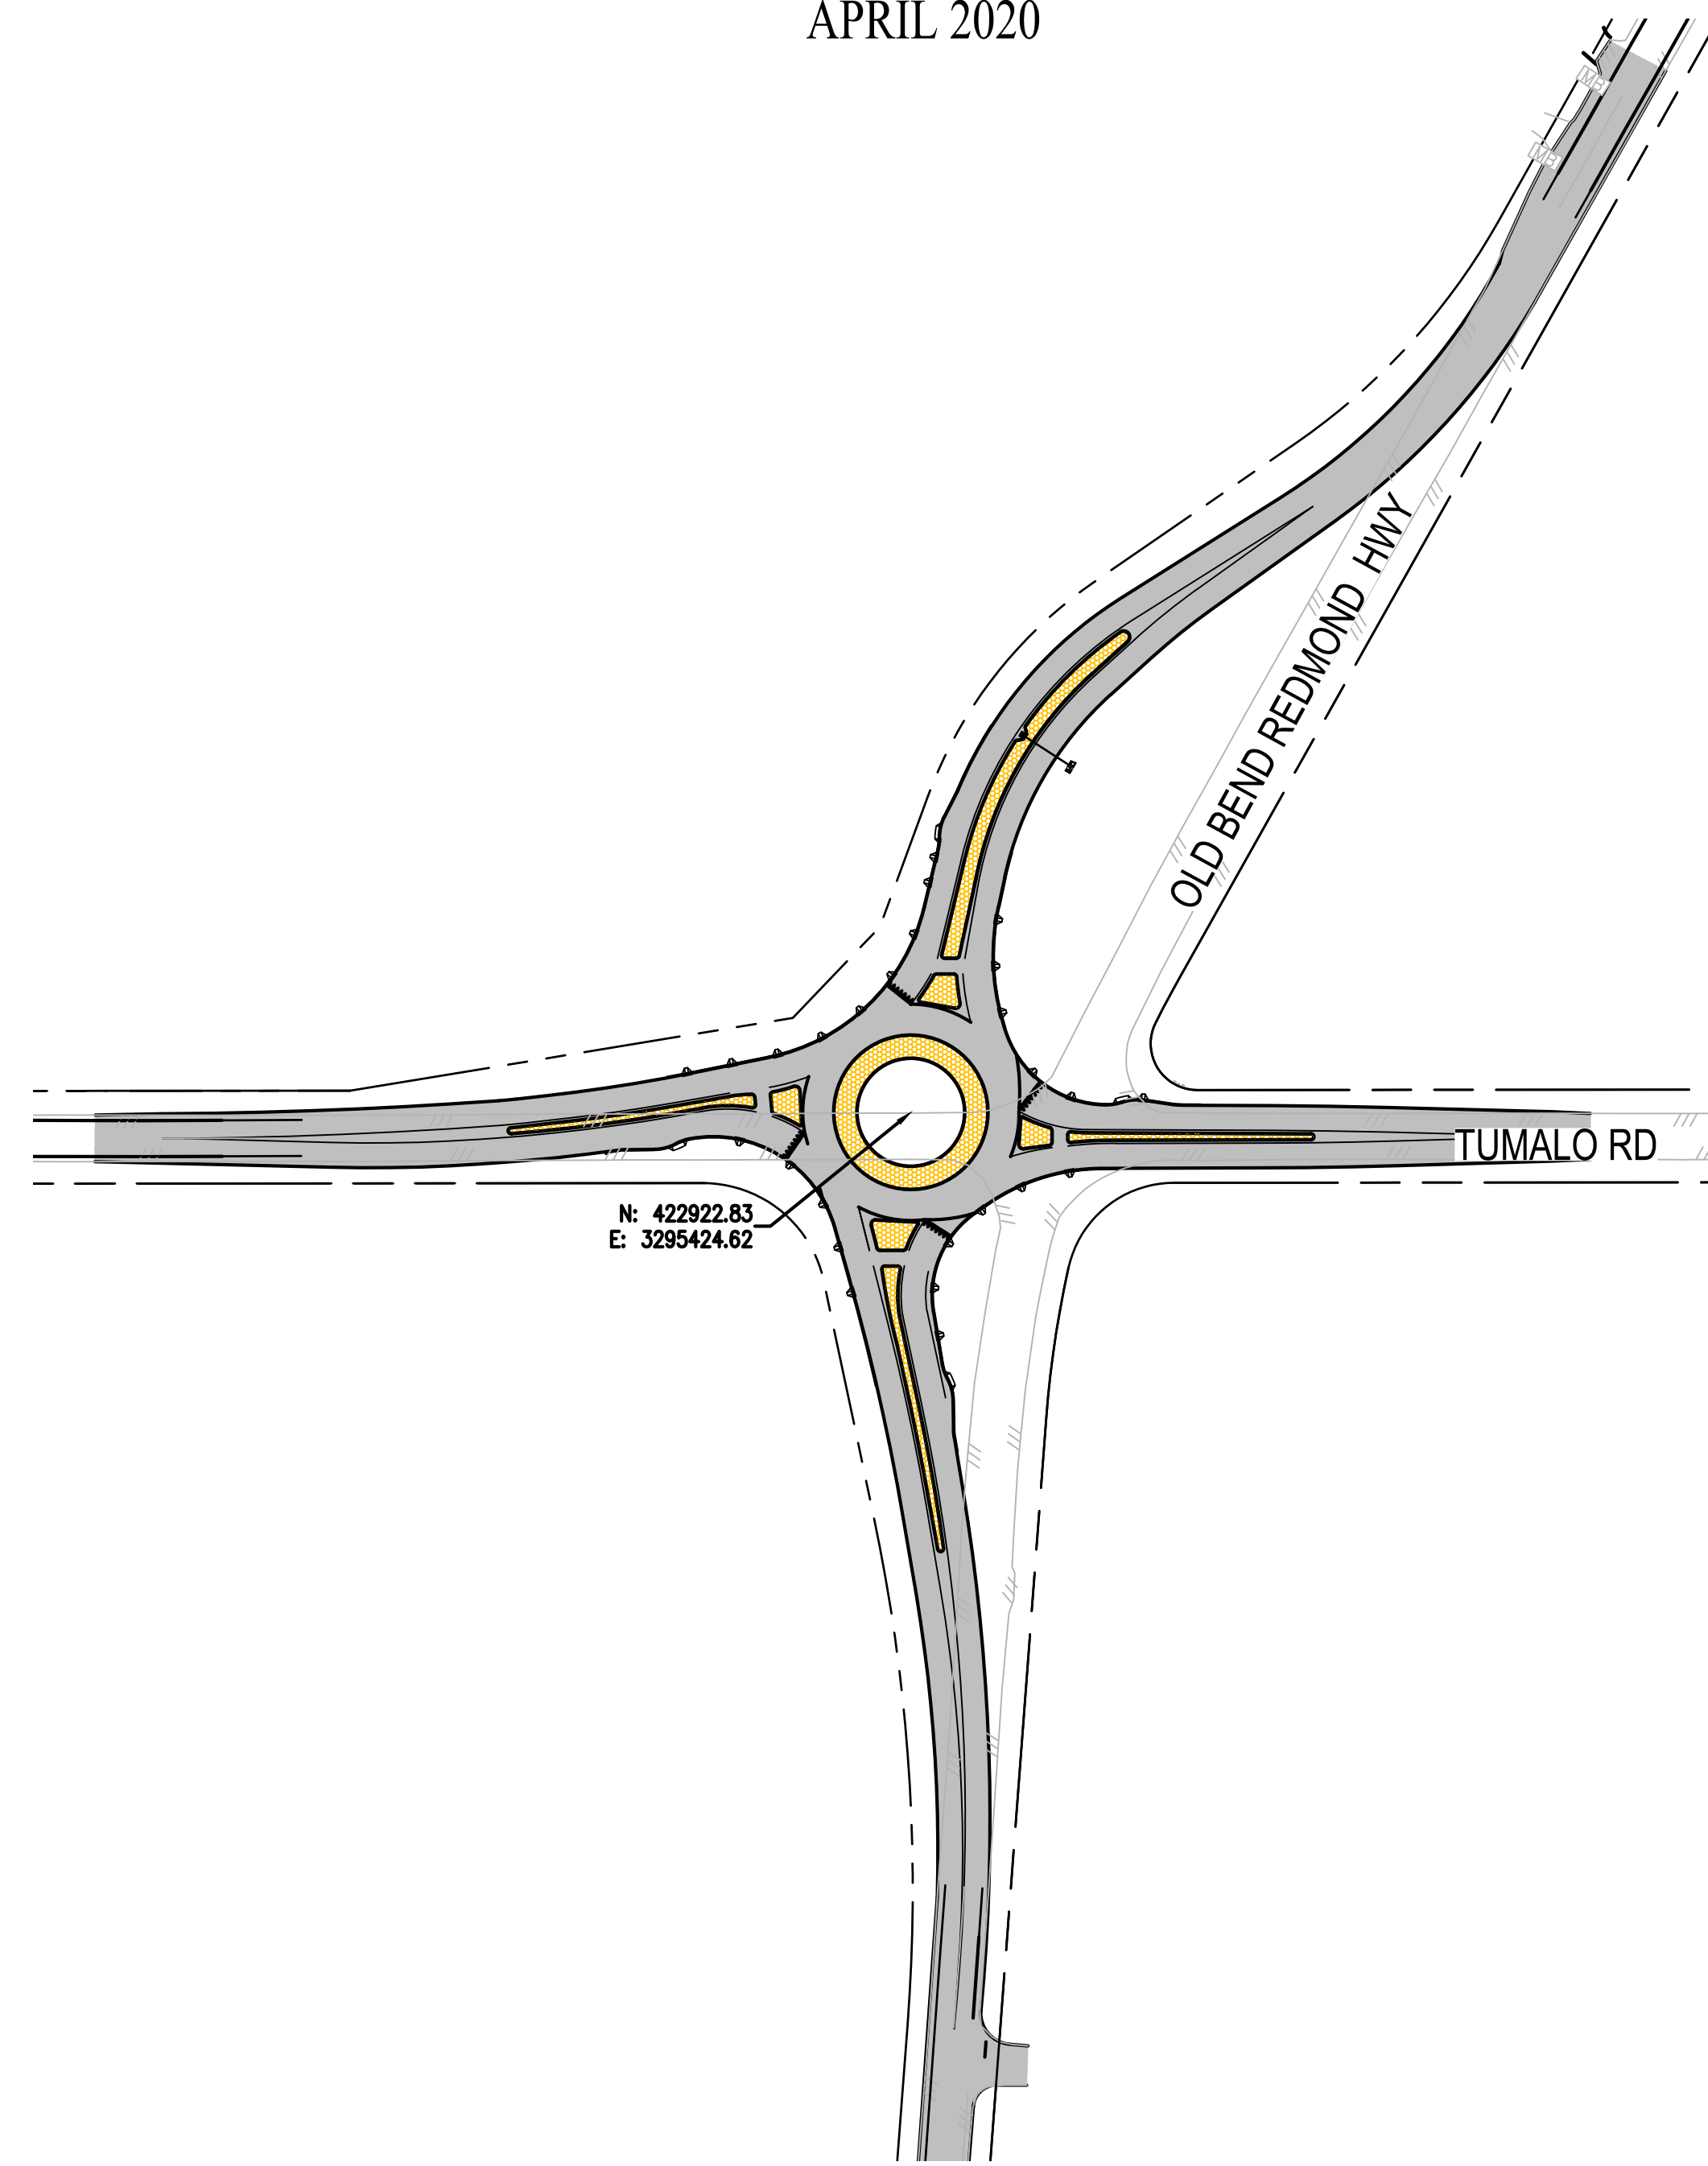

AREA MAP
1" = 100'

GENERAL NOTES:

ALL WORK DETAILED ON THESE PLANS TO BE PERFORMED UNDER CONTRACT SHALL, EXCEPT AS OTHERWISE STATED IN THIS CONTRACTS SPECIAL PROVISIONS, BE CONSTRUCTED IN ACCORDANCE WITH THE OREGON STATE "OREGON STANDARD SPECIFICATIONS FOR CONSTRUCTION," REVISED 2018

IT SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR TO CONTACT "UNDERGROUND LOCATE SERVICE" AT 1-800-332-2344, PRIOR TO THE START OF CONSTRUCTION, TO LOCATE POWER, GAS, CABLE TV, AND TELEPHONE UNDERGROUND FACILITIES. THE ONE CALL CENTER BUSINESS HOURS ARE 8:00 AM TO 5:00 PM. ANY LOCATE REQUESTS PLACED AFTER 5:00 P.M., WILL BE TREATED AS IF THEY WERE SUBMITTED AT 8:00 A.M. THE FOLLOWING BUSINESS MORNING. THE 2 BUSINESS-DAY (48 BUSINESS HOURS) WAITING PERIOD BEGINS AT THAT TIME. THE CONTRACTOR WILL ALSO BE RESPONSIBLE FOR CONTACTING THE APPROPRIATE PUBLIC AGENCY FOR THE LOCATION OF UNDERGROUND FACILITIES.

ATTENTION: OREGON LAW REQUIRES THAT YOU FOLLOW RULES ADOPTED BY THE OREGON UTILITY NOTIFICATION CENTER. THOSE RULES ARE SET FORTH IN O.A.R 952-001-0010 THROUGH 952-001-0090. YOU MAY OBTAIN COPIES OF THE RULES BY CALLING THE CENTER AT 503-232-1987

IT IS THE CONTRACTORS RESPONSIBILITY TO RE-ESTABLISH, PER OREGON REVISED STATUTES, ALL SURVEY MONUMENTS DISTURBED OR DESTROYED BY THIS WORK. THIS INCLUDES MONUMENTS NOT SHOWN IN THESE PLANS, WHICH ARE DISCOVERED DURING THE COURSE OF CONSTRUCTION. IT IS THE CONTRACTORS RESPONSIBILITY TO VERIFY ELEVATIONS OF SIDE SHOT MONUMENTS FOR USE AS TEMPORARY BENCH MARKS AND SET TEMPORARY BENCH MARKS OR ADDITIONAL HORIZONTAL CONTROL AS NEEDED.

UPON AWARD OF THE CONTRACT, PARAMETRIX WILL PROVIDE THE CONTRACTOR WITH AN "ASCII" POINT FILE CONTAINING ALL CONTROL POINTS ALONG WITH ALIGNMENT CENTER LINE POINTS AT 50' STATIONS.

| | |
|---|--|
| <p>EXISTING LEGEND:</p> <ul style="list-style-type: none"> ● FOUND MONUMENT (SEE CONTROL TABLE) ○ FOUND REBAR, NO CAP ● FOUND REBAR WITH CAP ○ FOUND IRON PIPE △ SET CONTROL POINT (SEE CONTROL TABLE) □ CABLE TV RISER ○ TELEPHONE POLE ○ POWER POLE WITH DROP LINE ○ POWER POLE WITH DROP LINE & TRANSFORMER ○ POWER POLE GUY ANCHOR ⊠ POWER METER □ TELEPHONE JUNCTION BOX □ TELEPHONE RISER □ WATER METER □ WATER VALVE □ WATER IRRIGATION VALVE ○ WATER WELL ○ SIGN, AS NOTED ★ JUNIPER TREE (TRUNK AND DRIPLINE DIAMETER NOTED) ○ DECIDUOUS TREE (TRUNK AND DRIPLINE DIAMETER NOTED) — FOG LINE STRIPING — DOUBLE YELLOW STRIPING — EDGE OF PAVEMENT — EDGE OF CONCRETE — EDGE OF GRAVEL — ROCKERY — CENTERLINE IRRIGATION DITCH — WOOD FENCE — BARB WIRE FENCE — P POWER LOCATE MARKING — OP POWER OVERHEAD — FO FIBER OPTIC LOCATE MARKING — T TELEPHONE LOCATE MARKING — IRR IRRIGATION LOCATE MARKING — RIGHT-OF-WAY LINE — CENTER LINE RIGHT-OF-WAY — LOT LINE | <p>PROPOSED LEGEND</p> <ul style="list-style-type: none"> □ CURB CUT □ BIKE RAMP □ SWALE □ CURB □ GRAVEL SHOULDER □ WOOD FENCE □ SAWCUT □ ASPHALT □ STAMPED CONCRETE |
|---|--|



APPROVALS:


DESCHUTES COUNTY ROAD DEPARTMENT: _____

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED | DRAWN | DR/LYF | CHECKED | APPROVED |
|-----------|------|----|----------|-------|--------|---------|----------|
| | | | | | | | |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY.

FILE NAME: BE2509005-C1.0-CS00
 JOB No: 2509-005
 DATE: 12/2019

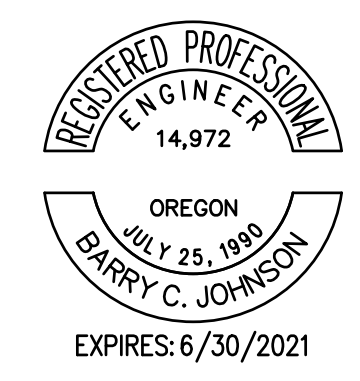

PROJECT NAME
**OLD BEND-REDMOND
 HIGHWAY/ TUMALO RD
 INTERSECTION IMPROVEMENTS**

COVER SHEET

DRAWING NO.
1 OF 43

C1.0

LAYOUT: C1.0 COVER SHEET
 PATH: J:\Bend\Projects\Clients\2509-deschutes county\297-2509-005 cbrh design phase\995\cadd\dwg\tumalo rd\boa\c05 PLOTTED BY: ricodov DATE: Friday, April 3, 2020 9:26:33 AM

CONSTRUCTION NOTES:

- DURING THE COURSE OF THE WORK, CONTRACTOR SHALL COORDINATE AND ACCOMMODATE OTHER CONTRACTORS OR OPERATIONS OF THE COUNTY.
- CONTRACTOR SHALL RESTRICT ALL OPERATIONS TO THE AREAS WITHIN THE PROJECT BOUNDARIES. ANY DISRUPTION TO NATIVE LANDSCAPES, OUTSIDE OF THE PROJECT AREA, SHALL BE RESTORED AT NO COST TO THE OWNER.
- CABLE AND GAS UTILITY TRENCHING SHALL BE COMPLETED IN ACCORDANCE WITH PLANS AND SPECIFICATIONS FROM APPLICABLE UTILITY COMPANIES. ALL CABLE AND GAS UTILITIES WILL BE INSTALLED BY THE APPLICABLE UTILITY COMPANY IN CONFORMANCE WITH THEIR JOINT TRENCH DETAIL. CONTRACTOR SHALL COORDINATE TRENCH EXCAVATIONS, BEDDING AND BACKFILL WITH POWER, PHONE, TELEVISION, AND GAS REPRESENTATIVES.
- ALL FINAL CUT SLOPES SHALL NOT EXCEED A GRADE OF 2 HORIZONTAL TO 1 VERTICAL UNLESS OTHERWISE APPROVED. FILL SLOPES SHALL NOT EXCEED A GRADE OF 2 HORIZONTAL TO 1 VERTICAL UNLESS OTHERWISE APPROVED BY THE ENGINEER OR SHOWN ON THESE PLANS.
- THE CONTRACTOR SHALL EMPLOY ALL LABOR, EQUIPMENT, AND METHODS REQUIRED TO PREVENT DUST IN AMOUNTS DAMAGING TO PROPERTY, CULTIVATED VEGETATION AND DOMESTIC ANIMALS OR CAUSING A NUISANCE TO PERSONS OCCUPYING BUILDINGS IN THE VICINITY OF THE JOB SITE. THE CONTRACTOR SHALL BE RESPONSIBLE FOR ANY DAMAGE CAUSED BY DUST RESULTING FROM CONSTRUCTION.
- THE CONTRACTOR SHALL FOLLOW ALL APPLICABLE INDUSTRIAL SAFETY REGULATIONS, DESCHUTES COUNTY AND THEIR OFFICIALS, THE ENGINEER, AND THE OWNER SHALL NOT BE RESPONSIBLE FOR ENFORCING SAFETY REGULATIONS.
- MATERIAL QUANTITIES USED, NOTED, OR PROVIDED IN A SEPARATE ITEMIZED QUANTITY TAKE-OFF ARE AN ENGINEER'S OPINION OF PROBABLE MATERIAL REQUIREMENTS, AND IS AN ESTIMATE ONLY. CONTRACTORS HAVE THE SOLE RESPONSIBILITY OF MAKING THEIR OWN QUANTITY TAKE-OFF AND COST ESTIMATE.

| FOUND MONUMENTS TABLE | | | | |
|-----------------------|-----------|------------|-----------|--|
| POINT NO | NORTHING | EASTING | ELEVATION | DESCRIPTION |
| 1220 | 422906.52 | 3294632.26 | 3275.26 | 3 INCH BRASS CAP DOWN 0.8 FEET IN MONUMENT BOX MARKED DESCHUTES COUNTY SURVEYOR'S OFFICE |
| 1221 | 420258.71 | 3294630.02 | 3295.56 | FOUND 3-1/4 INCH ALUMINUM CAP MARKED DESCHUTES COUNTY |
| 1222 | 421677.02 | 3295371.85 | 3278.14 | FOUND 5/8 INCH IRON ROD WITH YELLOW PLASTIC CAP MARKED AST JR PLS 1988 UP 0.1 |
| 1223 | 422693.80 | 3295448.39 | 3272.99 | FOUND 5/8 INCH IRON ROD WITH YELLOW PLASTIC CAP MARKED AST JR PLS 1988 DOWN 0.1 |
| 1224 | 422936.61 | 3295030.99 | 3273.00 | FOUND 1/2 INCH IRON ROD DOWN 0.15 |
| 1225 | 422878.16 | 3294632.37 | 3274.24 | FOUND 1/2 INCH SMOOTH IRON ROD DOWN 0.35 |
| 1226 | 423597.44 | 3295858.42 | 3284.40 | FOUND SCREW AND WASHER AT TOP OF FENCE COLUMN |
| 1227 | 424021.55 | 3296096.69 | 3294.95 | FOUND 1/4 INCH IRON ROD |
| 1228 | 424230.63 | 3296213.59 | 3310.83 | FOUND 1/4 INCH IRON ROD BENT TIE POE |
| 1229 | 422956.27 | 3295580.86 | 3274.48 | FOUND 3-1/2 INCH BRASS CAP IN CONCRETE MARKED USGS |
| 1240 | 421442.95 | 3295414.36 | 3277.79 | FOUND 1/2 INCH IRON ROD BENT N60°E 0.9 TIED POE UP 0.5 |
| 1241 | 421891.69 | 3295448.31 | 3274.86 | FOUND 1/2 INCH IRON ROD FLUSH |
| 1242 | 422279.92 | 3295477.47 | 3272.75 | FOUND 5/8 INCH IRON ROD FLUSH |
| 1243 | 422689.31 | 3295507.93 | 3273.44 | FOUND 1/2 INCH IRON ROD BENT N75°W 0.6 TIE POE FLUSH |
| 1244 | 422877.25 | 3295731.56 | 3275.69 | FOUND 1/2 INCH IRON ROD DOWN 0.3 |
| 1245 | 422877.70 | 3296336.60 | 3278.46 | FOUND 1/2 INCH IRON ROD UP 0.1 |
| 1246 | 422877.86 | 3296816.21 | 3289.94 | FOUND 1/2 INCH IRON ROD DOWN 0.3 |
| 1247 | 422877.68 | 3296931.17 | 3298.40 | FOUND 1/2 INCH IRON ROD WITH ALUMINUM CAP NOT LEGIBLE DOWN 0.7 |

| PARAMETRIX CONTROL TABLE | | | | |
|--------------------------|-----------|------------|-----------|---|
| POINT # | NORTHING | EASTING | ELEVATION | DESCRIPTION |
| 1010 | 422931.40 | 3295085.52 | 3272.28 | 5/8 INCH IRON ROD WITH 1-1/2 INCH ALUMINUM CAP MARKED PARAMETRIX 1010 |
| 1011 | 424054.02 | 3296175.80 | 3304.63 | 5/8 INCH IRON ROD WITH 1-1/2 INCH ALUMINUM CAP MARKED PARAMETRIX 1011 |
| 1012 | 423528.34 | 3295826.96 | 3278.83 | 5/8 INCH IRON ROD WITH 1-1/2 INCH ALUMINUM CAP MARKED PARAMETRIX 1012 |
| 1013 | 422409.34 | 3295433.02 | 3273.25 | 5/8 INCH IRON ROD WITH 1-1/2 INCH ALUMINUM CAP MARKED PARAMETRIX 1013 |
| 1014 | 422926.56 | 3296050.24 | 3277.04 | 5/8 INCH IRON ROD WITH 1-1/2 INCH ALUMINUM CAP MARKED PARAMETRIX 1014 |
| 1016 | 422984.43 | 3295533.86 | 3275.30 | 5/8 INCH IRON ROD WITH RED PLASTIC CAP MARKED PMX CONTROL |
| 1017 | 422880.28 | 3295563.18 | 3274.16 | 5/8 INCH IRON ROD WITH RED PLASTIC CAP MARKED PMX CONTROL |


CONTROL POINTS & MONUMENTS
N.T.S. 1
C1.1

| ODOT STD DWG INDEX | |
|--------------------|--|
| RD 100 | MAILBOX SUPPORT |
| RD 317 | CULVERT EMBANKMENT PROTECTION AND RIPRAP PADS |
| RD 364 | CONCRETE INLETS |
| RD 1040 | SEDIMENT FENCE |
| TM 200 | SIGN INSTALLATION DETAILS |
| TM 201 | MISCELLANEOUS SIGN PLACEMENT DETAILS |
| TM 223 | CONVENTIONAL ROADS DIRECTIONAL SIGN LAYOUT STREET NAME SIGNS |
| TM 500 | PAVEMENT MARKING STANDARD DETAIL BLOCKS |
| TM 503 | PAVEMENT MARKING STANDARD DETAIL BLOCKS |
| TM 530 | INTERSECTION PAVEMENT MARKINGS (CROSSWALK, STOP BAR & BIKE LANE STENCIL) |
| TM 539 | MEDIAN AND LEFT TURN CHANNELIZATION DETAILS |
| TM 560 | ALIGNMENT LAYOUT: GENERAL |
| TM 561 | ALIGNMENT LAYOUT: LEFT TURN LANE, CENTERLINE, & MEDIANS |
| TM 635 | BREAKAWAY SIGN & LUMINAIRE SUPPORTS--SUPPORT LOCATION GUIDELINES |
| TM 671 | 3 SECOND GUST WIND SPEED MAP |
| TM 675 | EXTRUDED ALUMINUM PANELS |
| TM 676 | SIGN ATTACHMENTS |
| TM 678 | SECONDARY SIGN MOUNTING DETAILS |
| TM 681 | PERFORATED STEEL SQUARE TUBE (PSST) SIGN SUPPORT INSTALLATION |
| TM 688 | PERFORATED STEEL SQUARE TUBE (PSST) SLIP BASE FOUNDATION |
| TM 800 | TABLES, ABRUPT EDGE AND PCMS DETAILS |
| TM 810 | TEMPORARY PAVEMENT MARKERS |
| TM 820 | TEMPORARY BARRICADES |
| TM 821 | TEMPORARY SIGN SUPPORTS |
| TM 822 | TEMPORARY SIGN SUPPORTS |
| TM 840 | CLOSURE DETAILS |
| TM 841 | INTERSECTION WORK ZONE DETAILS |
| TM 850 | 2-LANE, 2-WAY ROADWAYS |

LAYOUT: C1.1 GENERAL NOTES PATH: U:\Bend\Projects\Clients\2509-Deschutes County\297-2509-005 OBRH Design Phase\99Svcs\CADD\DWG\TUMALO RD RBAs\CPS PLOTTED BY: ricedev DATE: Tuesday, April 28, 2020 1:49:07 PM

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY
 FILE NAME: BE2509005-C1.1-NT00
 JOB No: 297-2509-005
 DATE: 12/2019

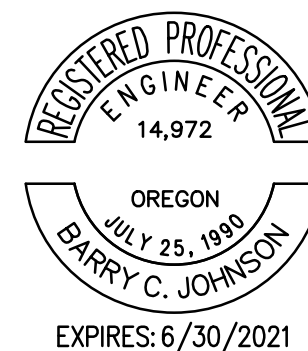


PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS

GENERAL NOTES

DRAWING NO.
 2 OF 43
C1.1

FOR BIDDING REFERENCE ONLY

LAYOUT: C2.0 TYPICAL SECTIONS PATH: U:\Bend\Projects\Clients\2509-Deschutes County\297-2509-005 OBRH Design Phase\99Sves\CADD\DWG\TUMALO RD\RBAs\C2.0'S PLOTTED BY: ficosov DATE: Monday, April 27, 2020 11:16:54 AM

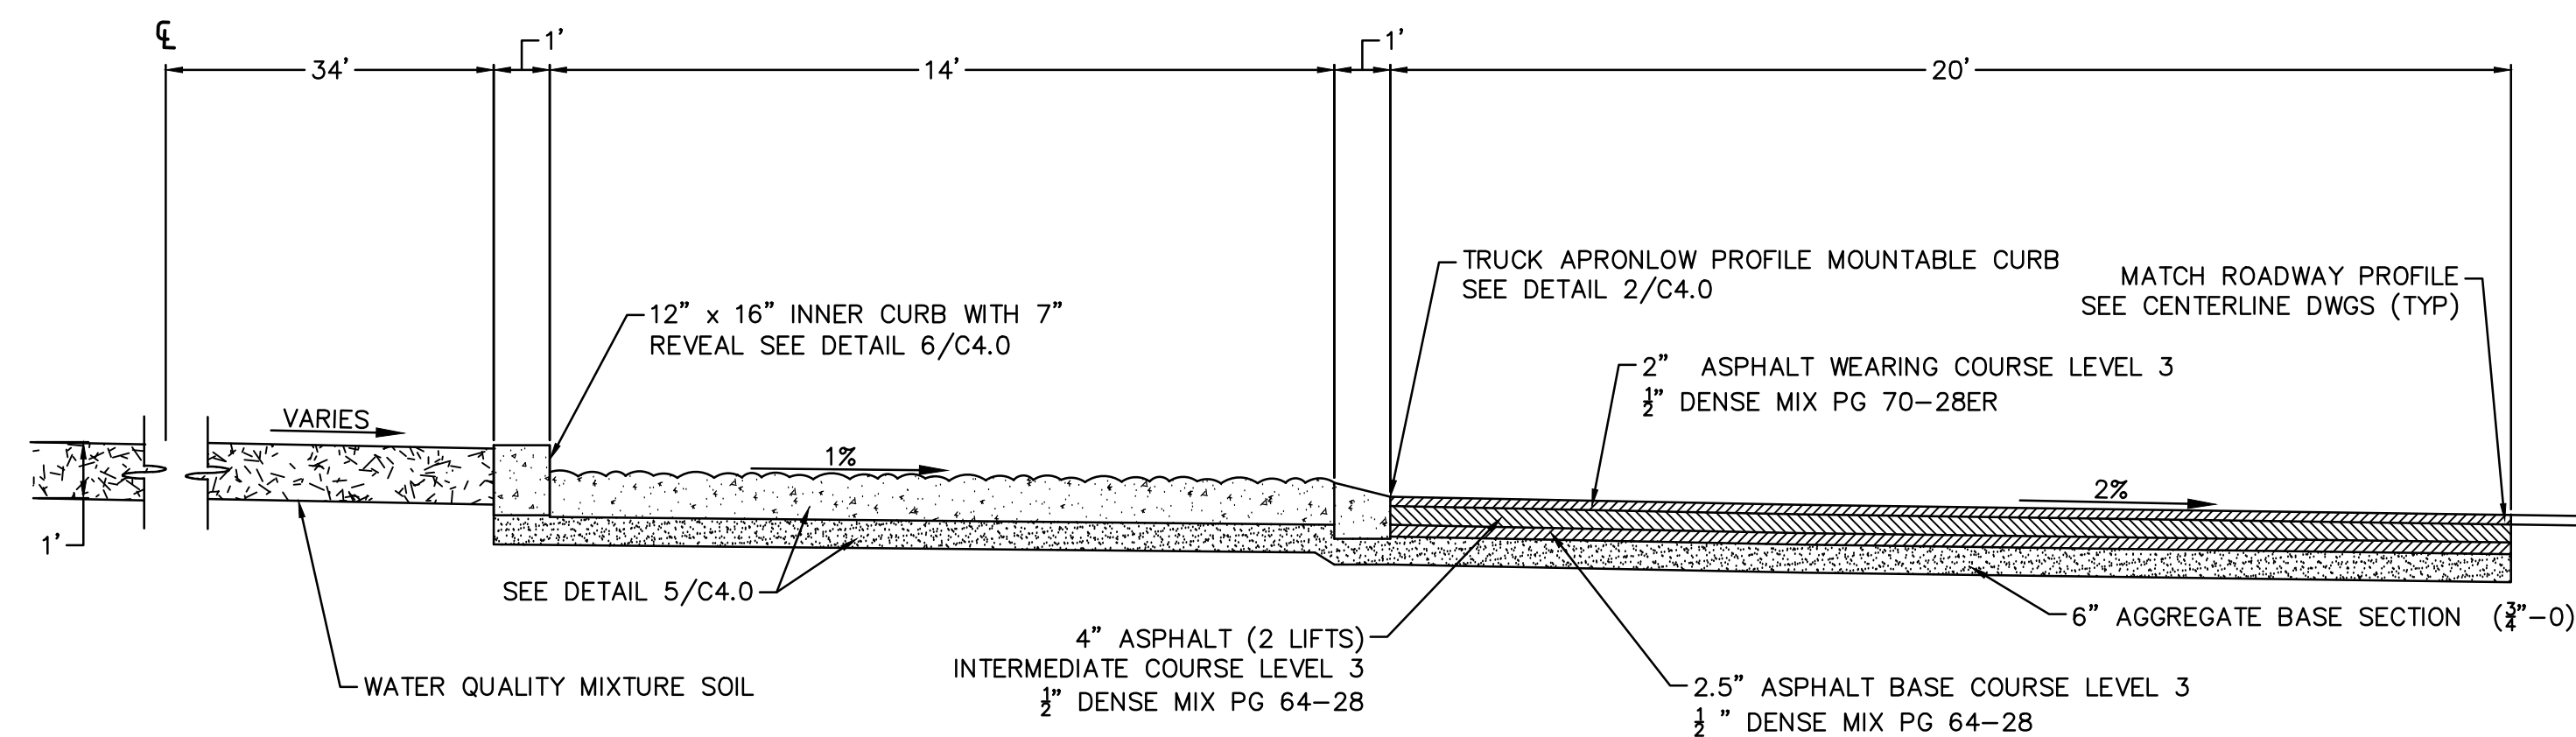


INNER ROUNDABOUT SECTION

STA: 0+00-4+40

N.T.S.

1
C2.0

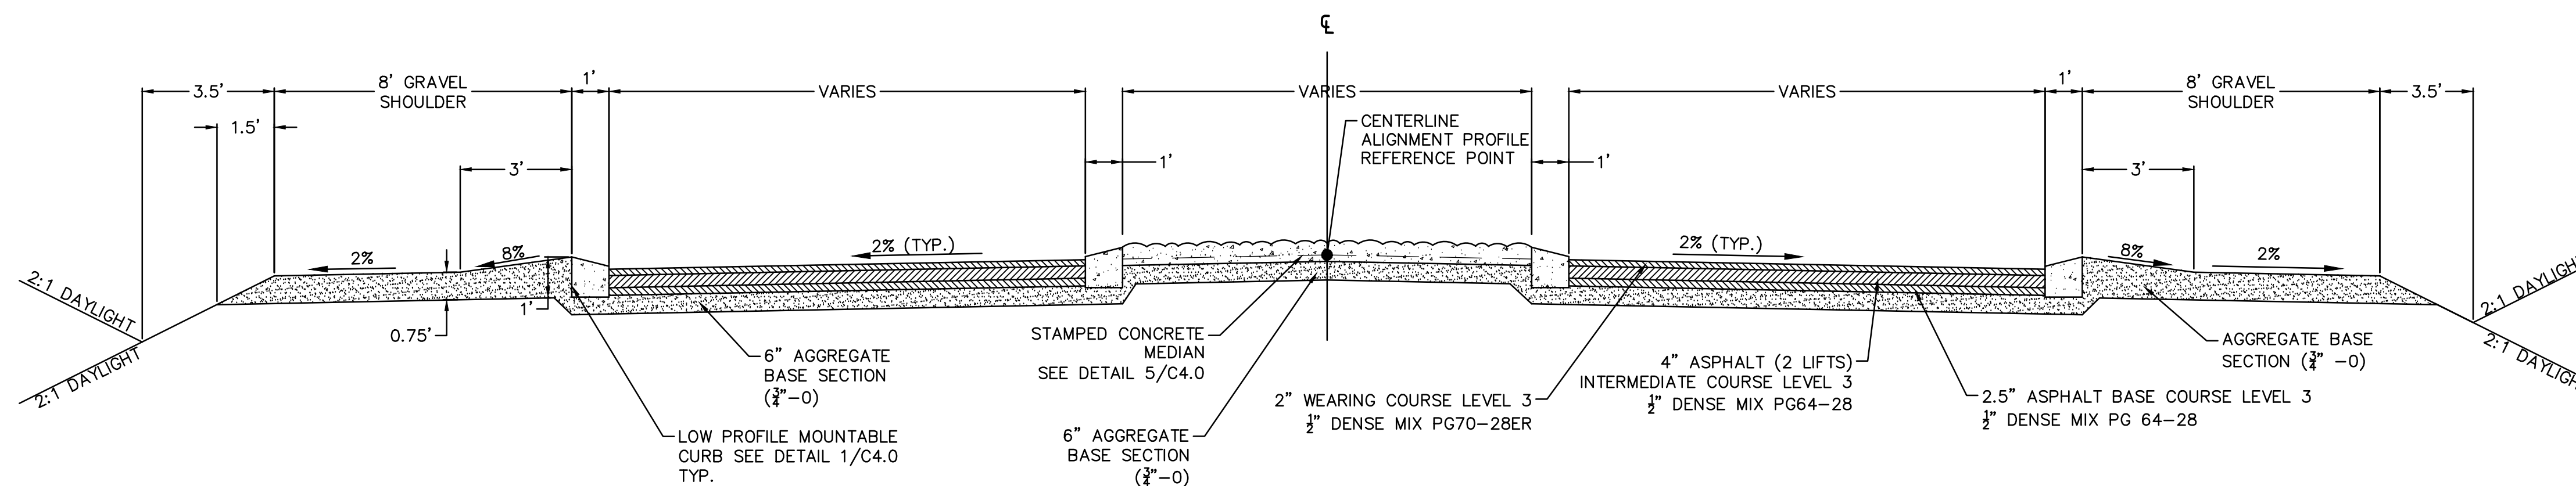


ROADWAY PERPETUAL SECTION

TUMALO RD STA: 103+65-104+66 STA:106+05-107+25
OBR HIGHWAY STA: 207+71.4-208+80 STA:210+20-211+25


N.T.S.

2
C2.0

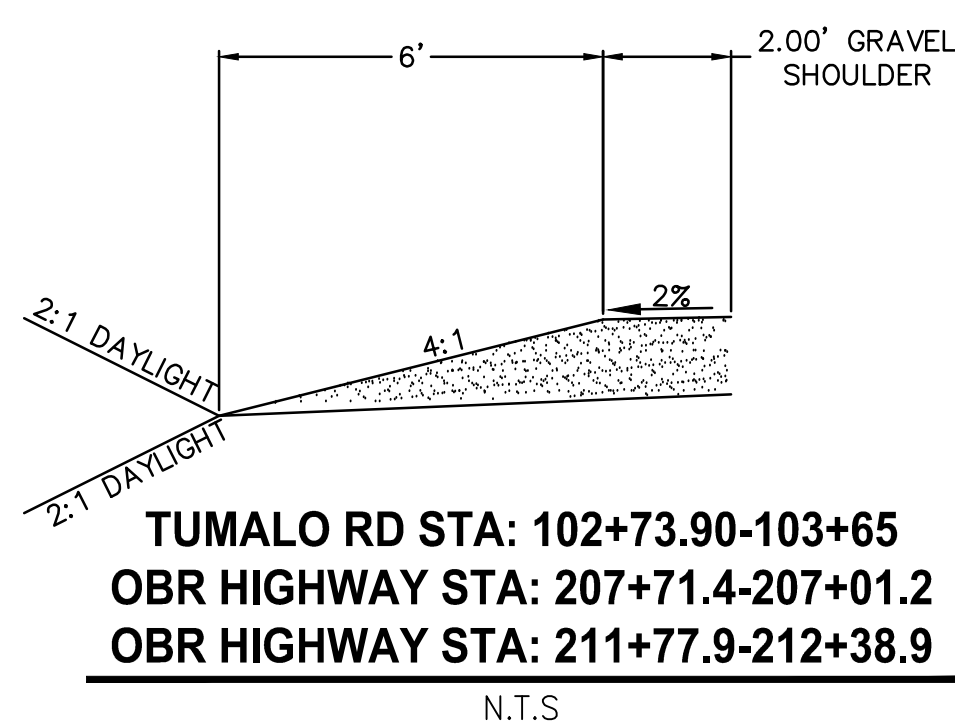

TUMALO RD STA: 102+73.90-103+65
OBR HIGHWAY STA: 207+71.4-207+01.2
OBR HIGHWAY STA: 211+77.9-212+38.9

N.T.S.

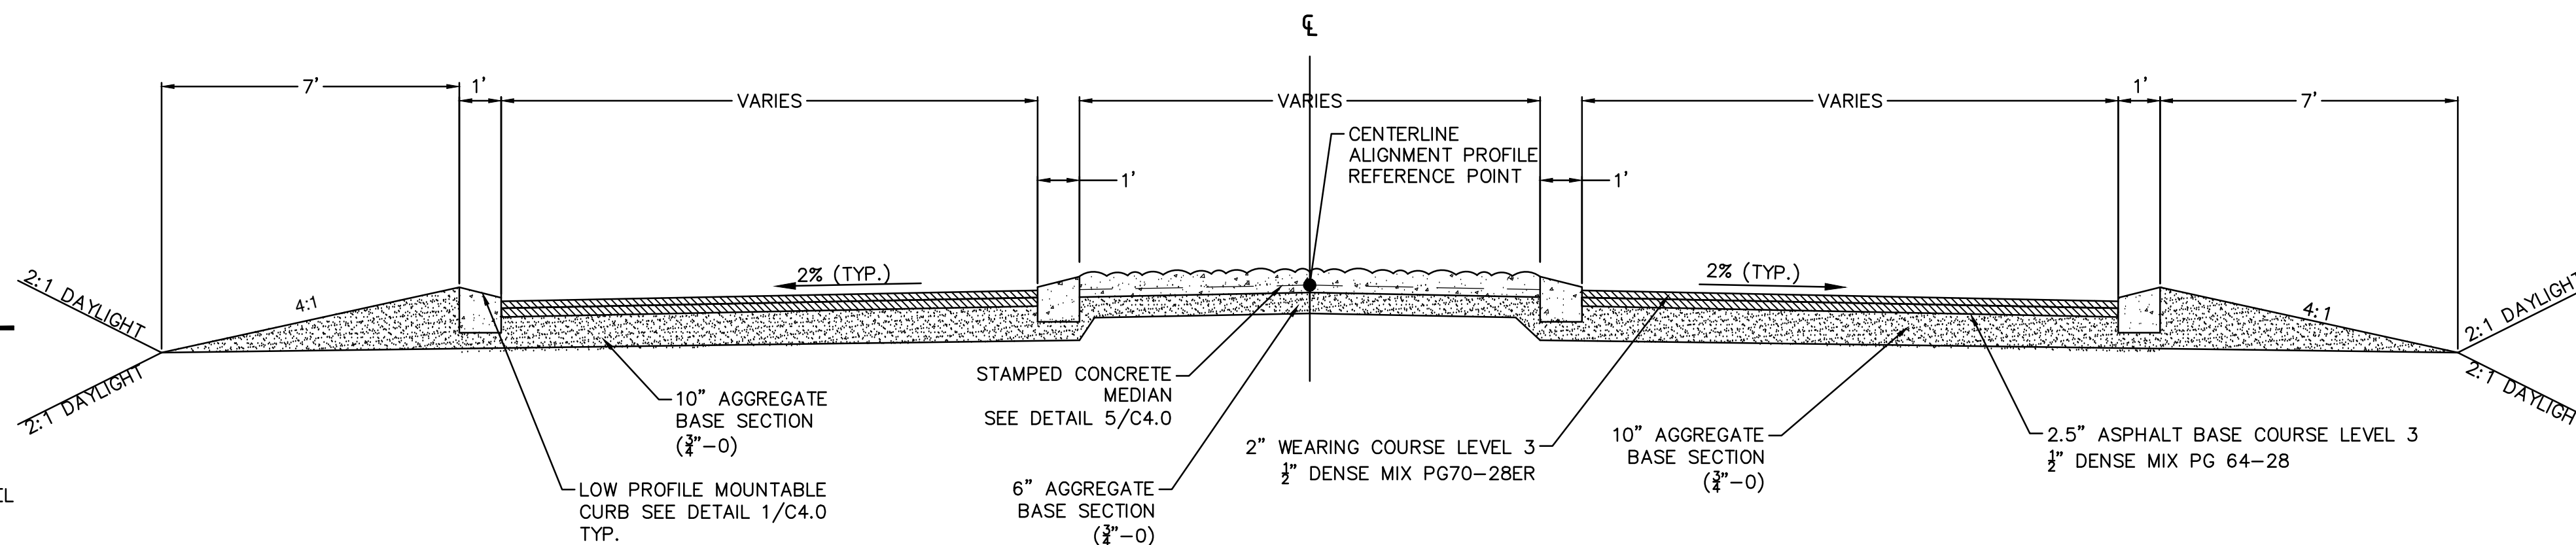


ROADWAY WITH MEDIAN & VARYING CURB

TUMALO RD STA: 102+73.90-103+65 STA:107+25-107.98.1
OBR HIGHWAY STA:206+00.8-207+71.4 STA: 211+25-212+38.9


N.T.S.

3
C2.0

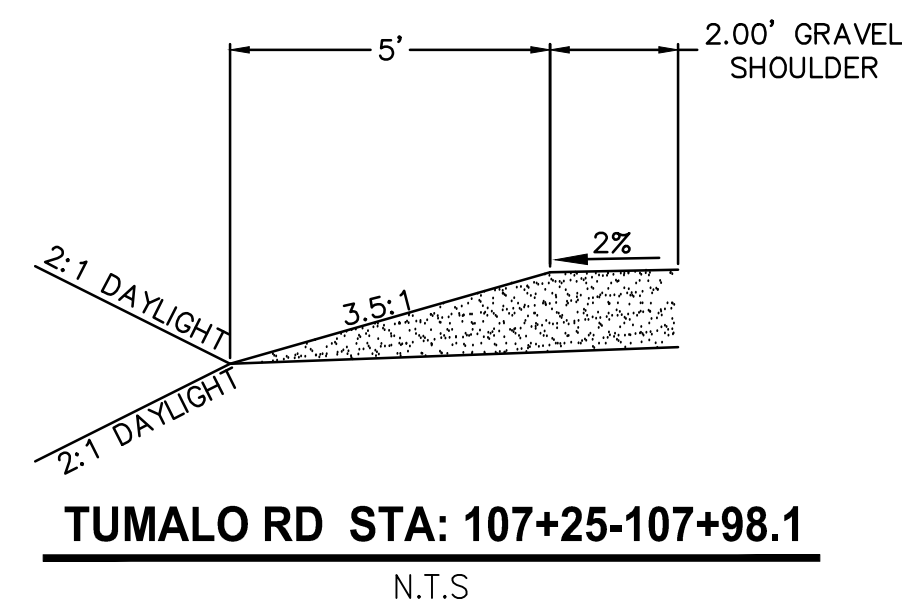


TUMALO RD STA: 107+25-107+98.1

N.T.S.

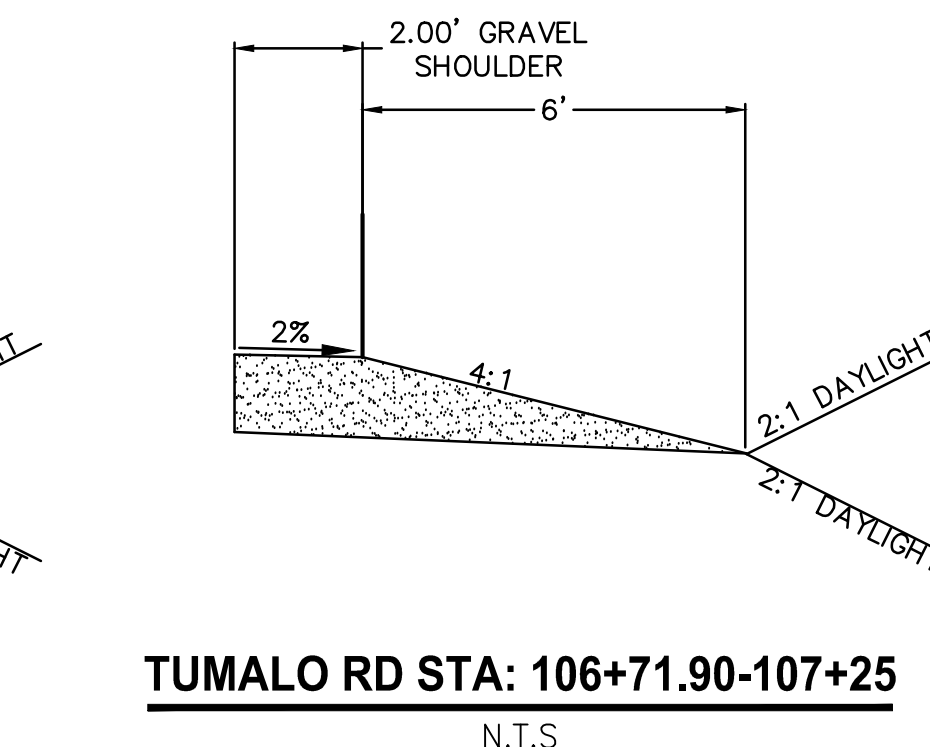


TUMALO RD STA: 106+71.90-107+25

N.T.S.

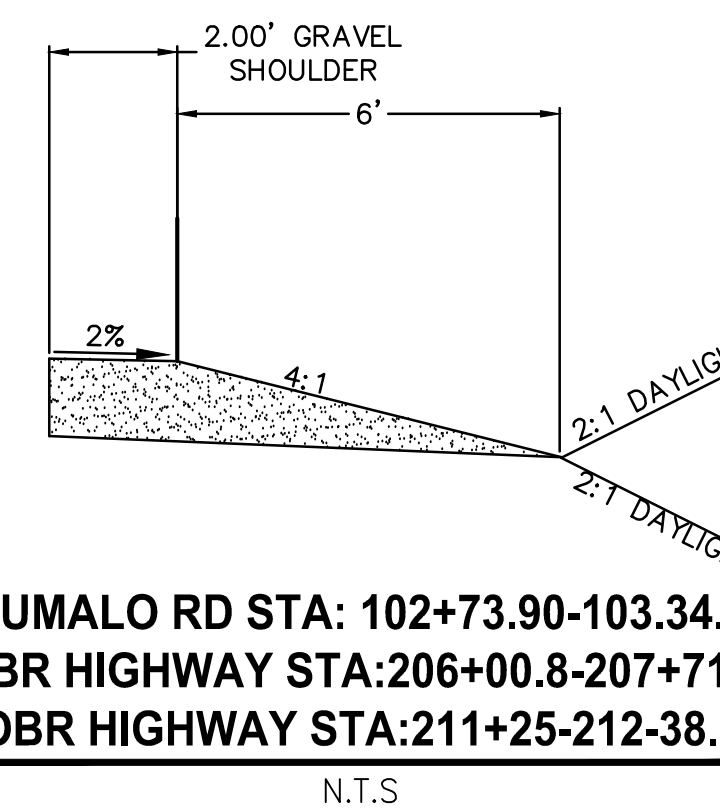

TUMALO RD STA: 102+73.90-103.34.8
OBR HIGHWAY STA:206+00.8-207+71.4
OBR HIGHWAY STA:211+25-212-38.9

N.T.S.

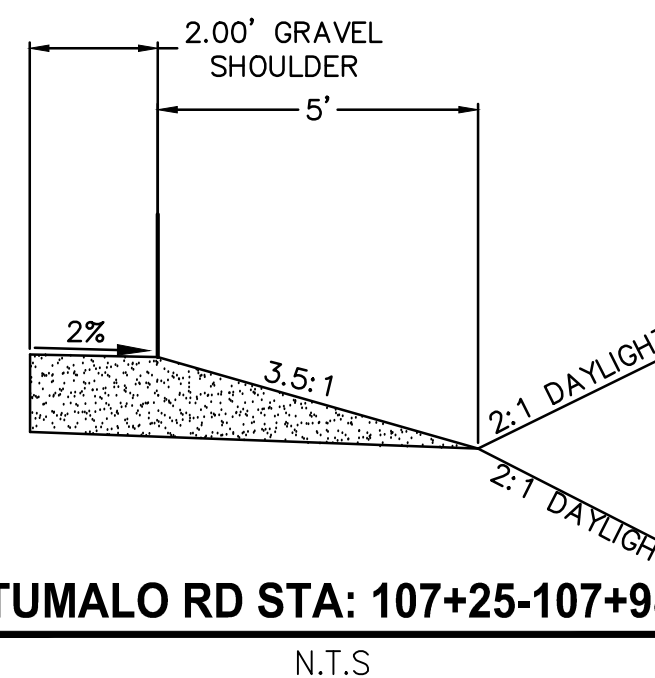


TUMALO RD STA: 107+25-107+98.1

N.T.S.

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY.
 FILE NAME: BE2509005-C2.0-TS00
 JOB No: 297-2509-005
 DATE: 12/2019





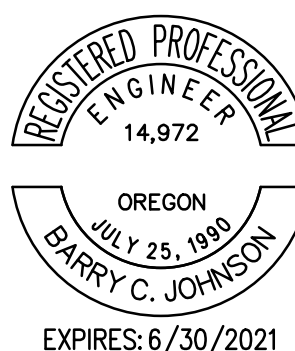


PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS

TYPICAL SECTIONS


DRAWING NO.
 3 OF 43
C2.0

LAYOUT: C2.1 TYPICAL SECTIONS PATH: U:\Bent\Projects\Clients\2509-Deschutes County\297-2509-005 OBRH Design Phase\995\cs\CADD\DWG\TUMALO RD\RBAs\C2.1 PLOTTED BY: ricedov DATE: Monday, April 27, 2020 11:21:10 AM

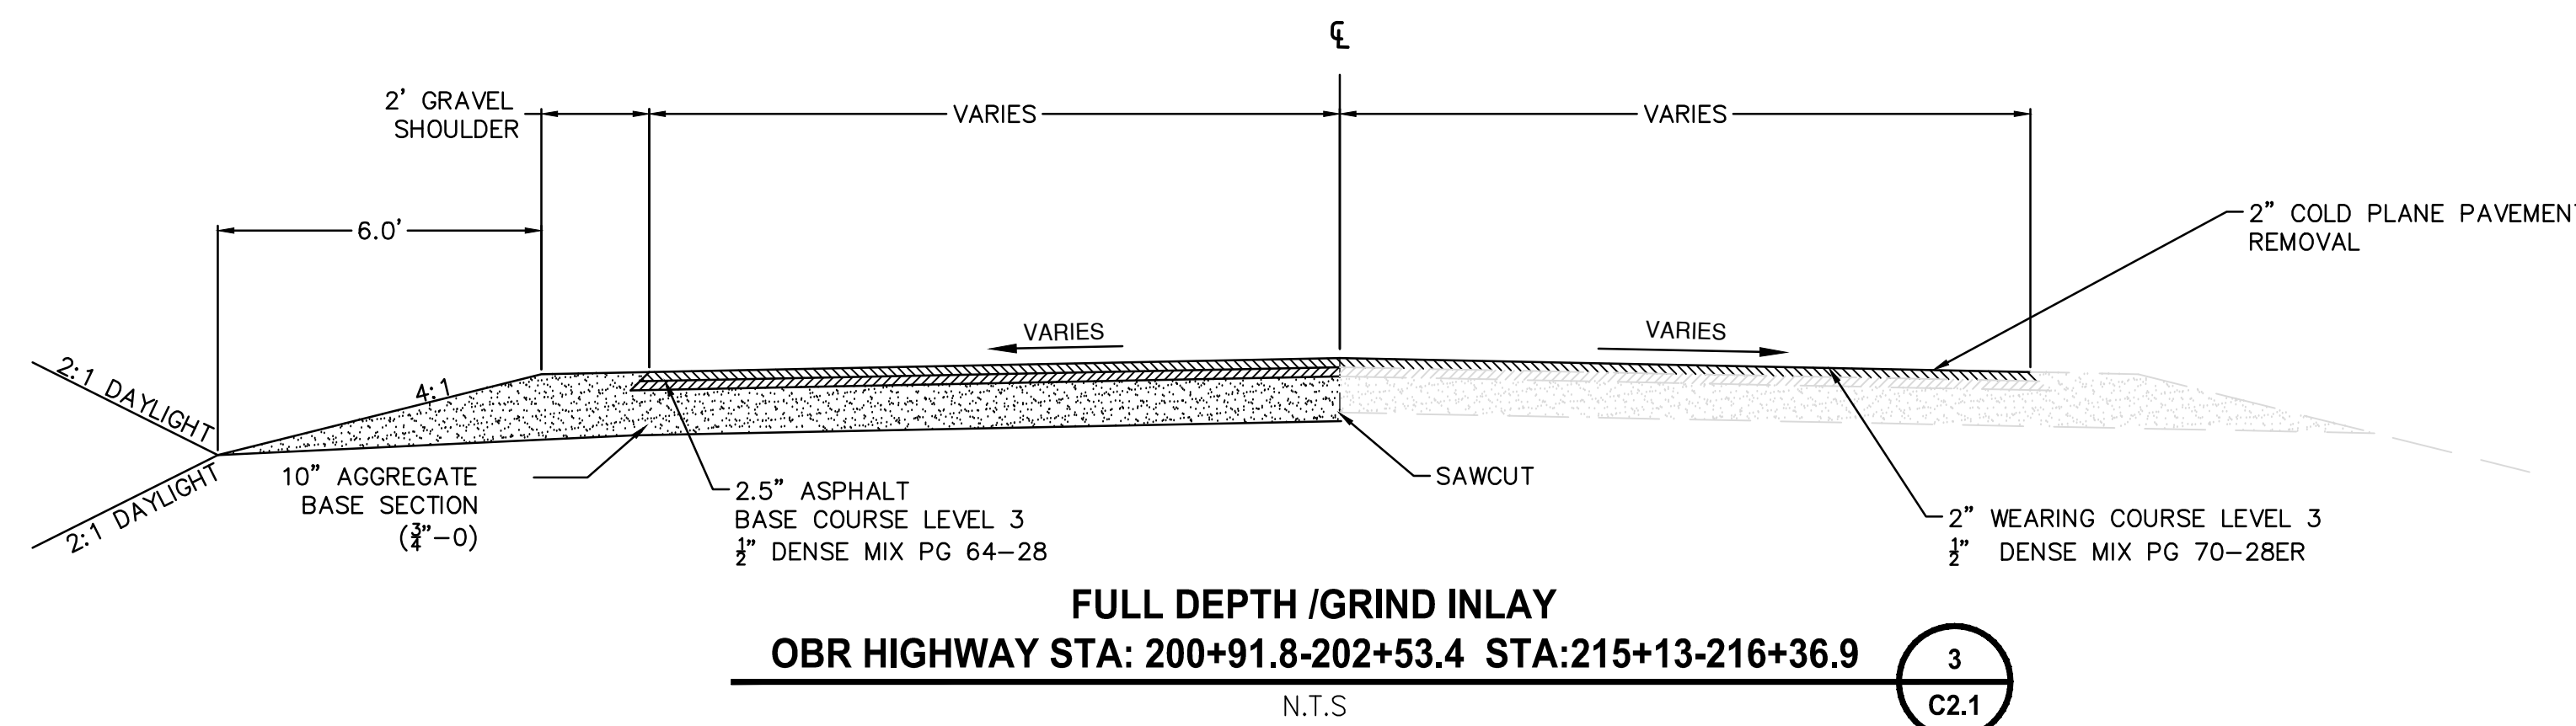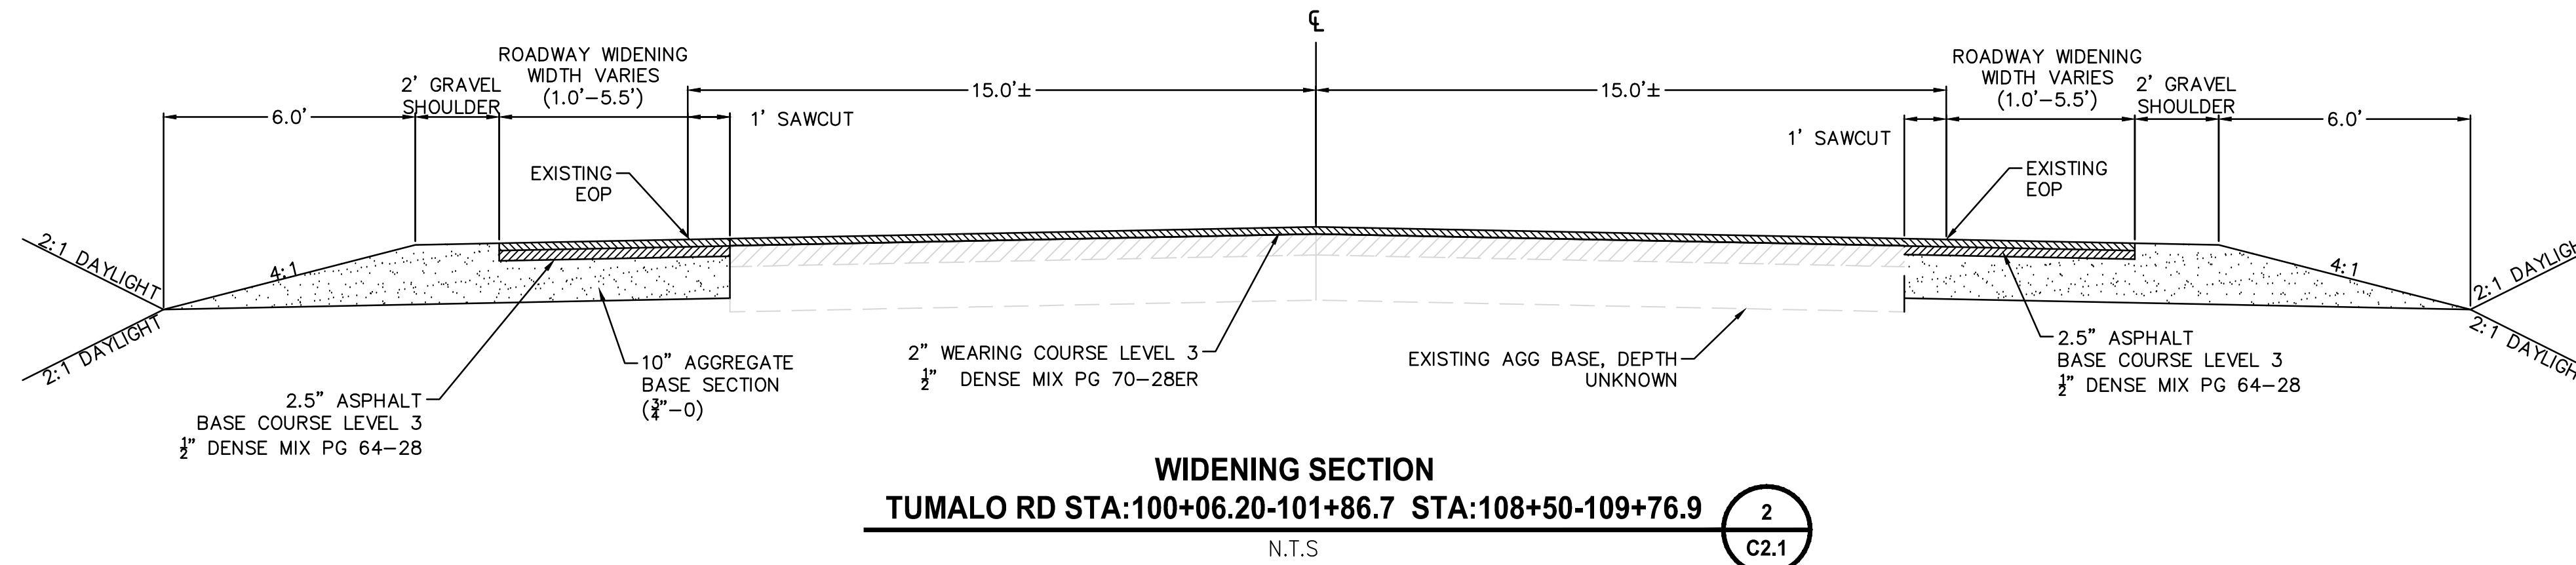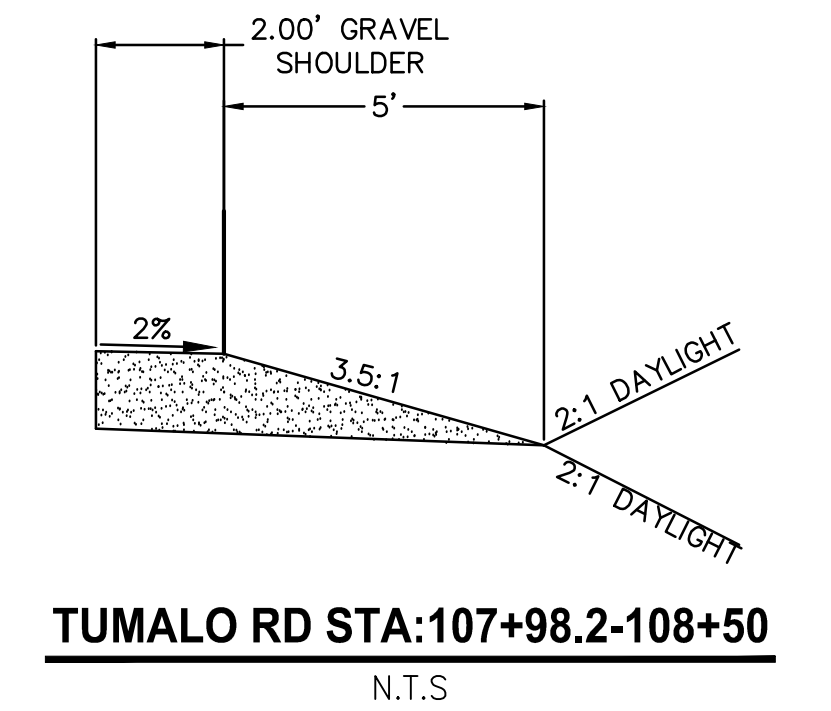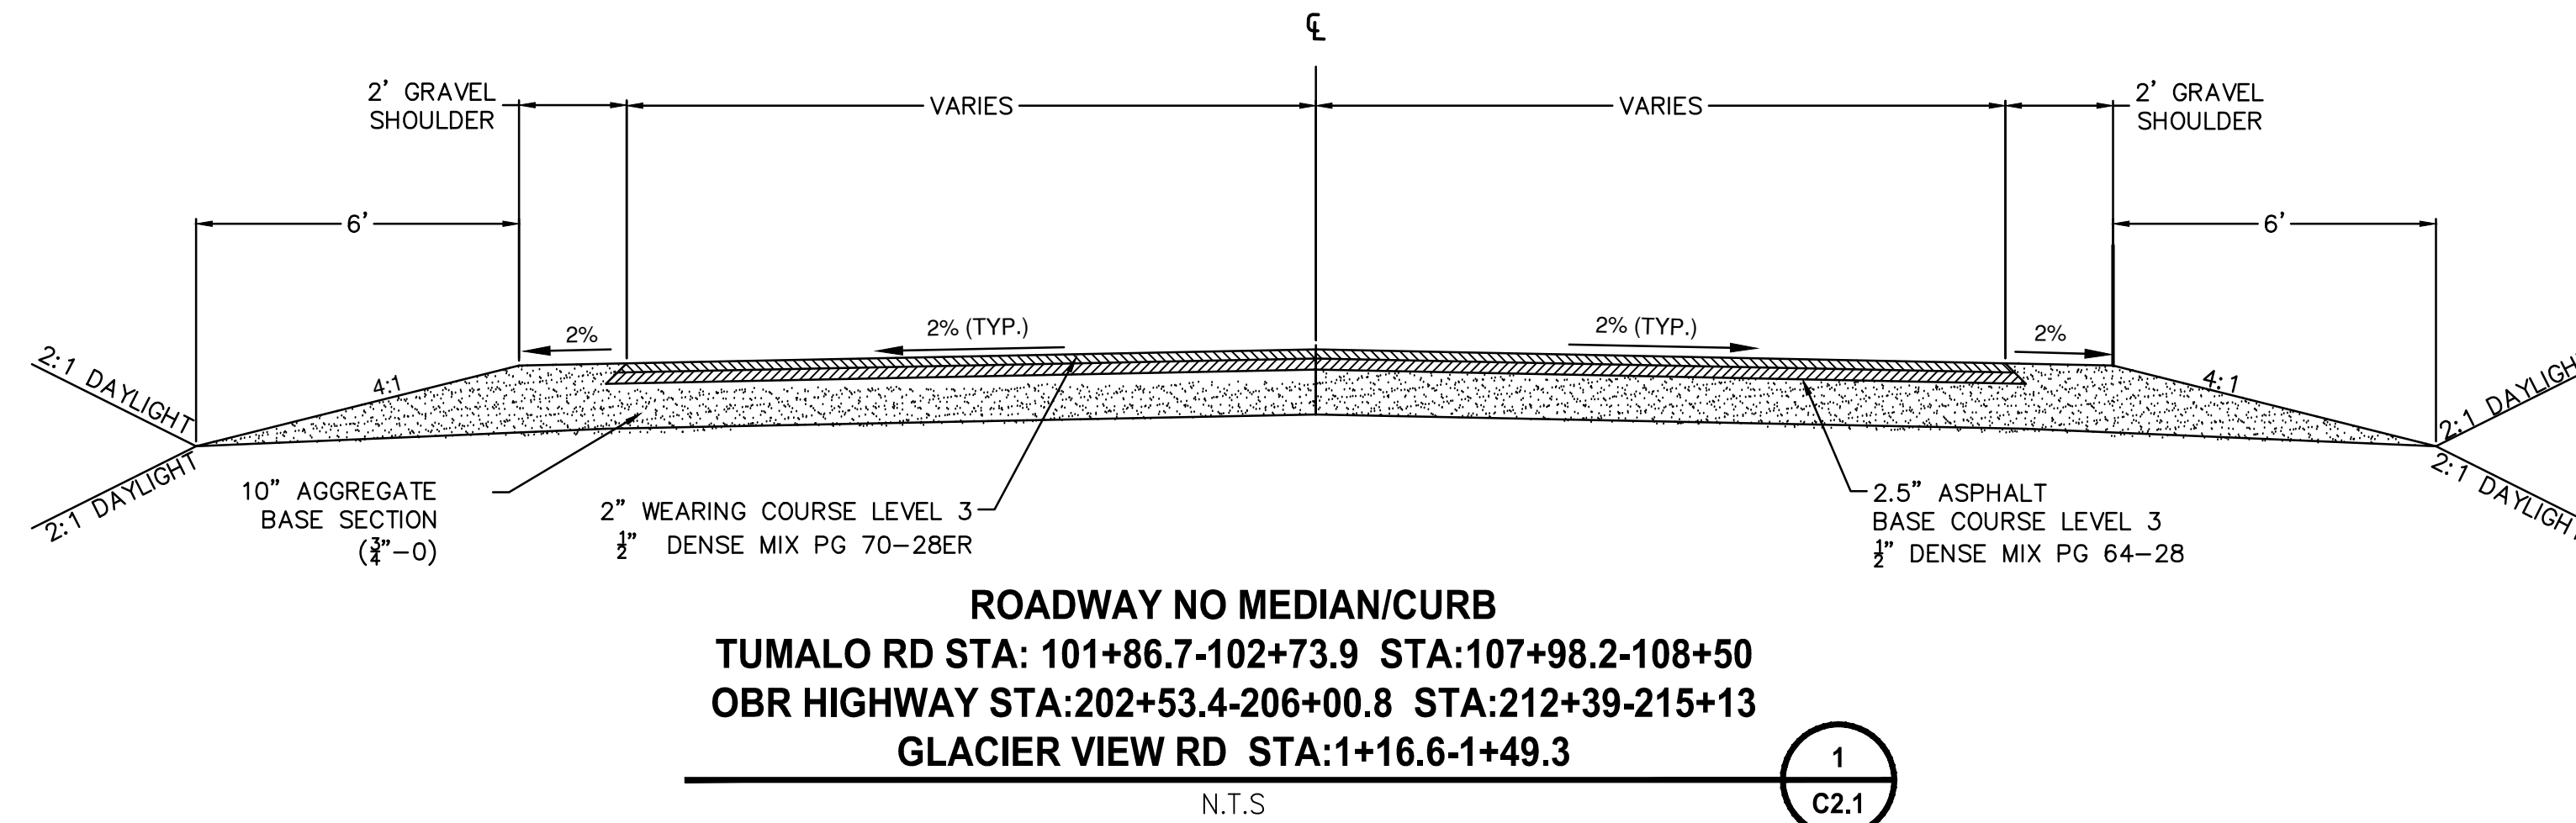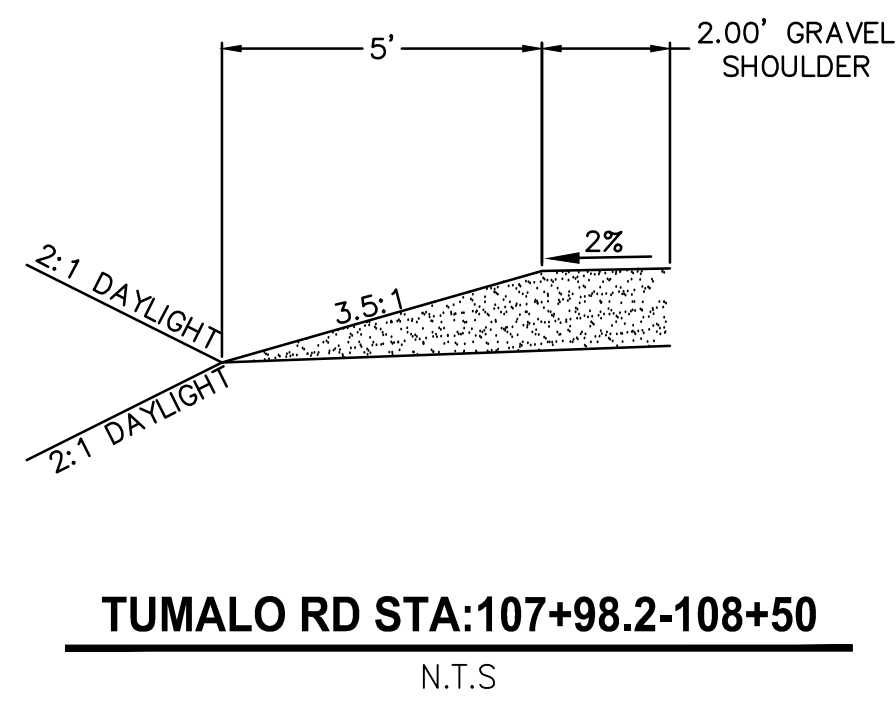

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE.
IF NOT, SCALE ACCORDINGLY.
 FILE NAME
 BE2509005-C2.0-TS00
 JOB No.
 297-2509-005
 DATE
 12/2019

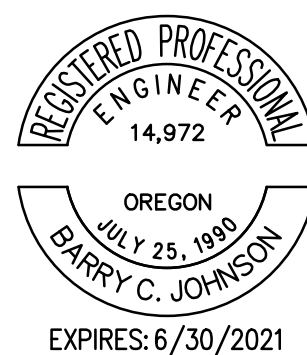


PROJECT NAME
**OLD BEND-REDMOND
 HIGHWAY/ TUMALO RD
 INTERSECTION IMPROVEMENTS**






TYPICAL SECTIONS

DRAWING NO.
 4 OF 43
C2.1

FOR BIDDING REFERENCE ONLY

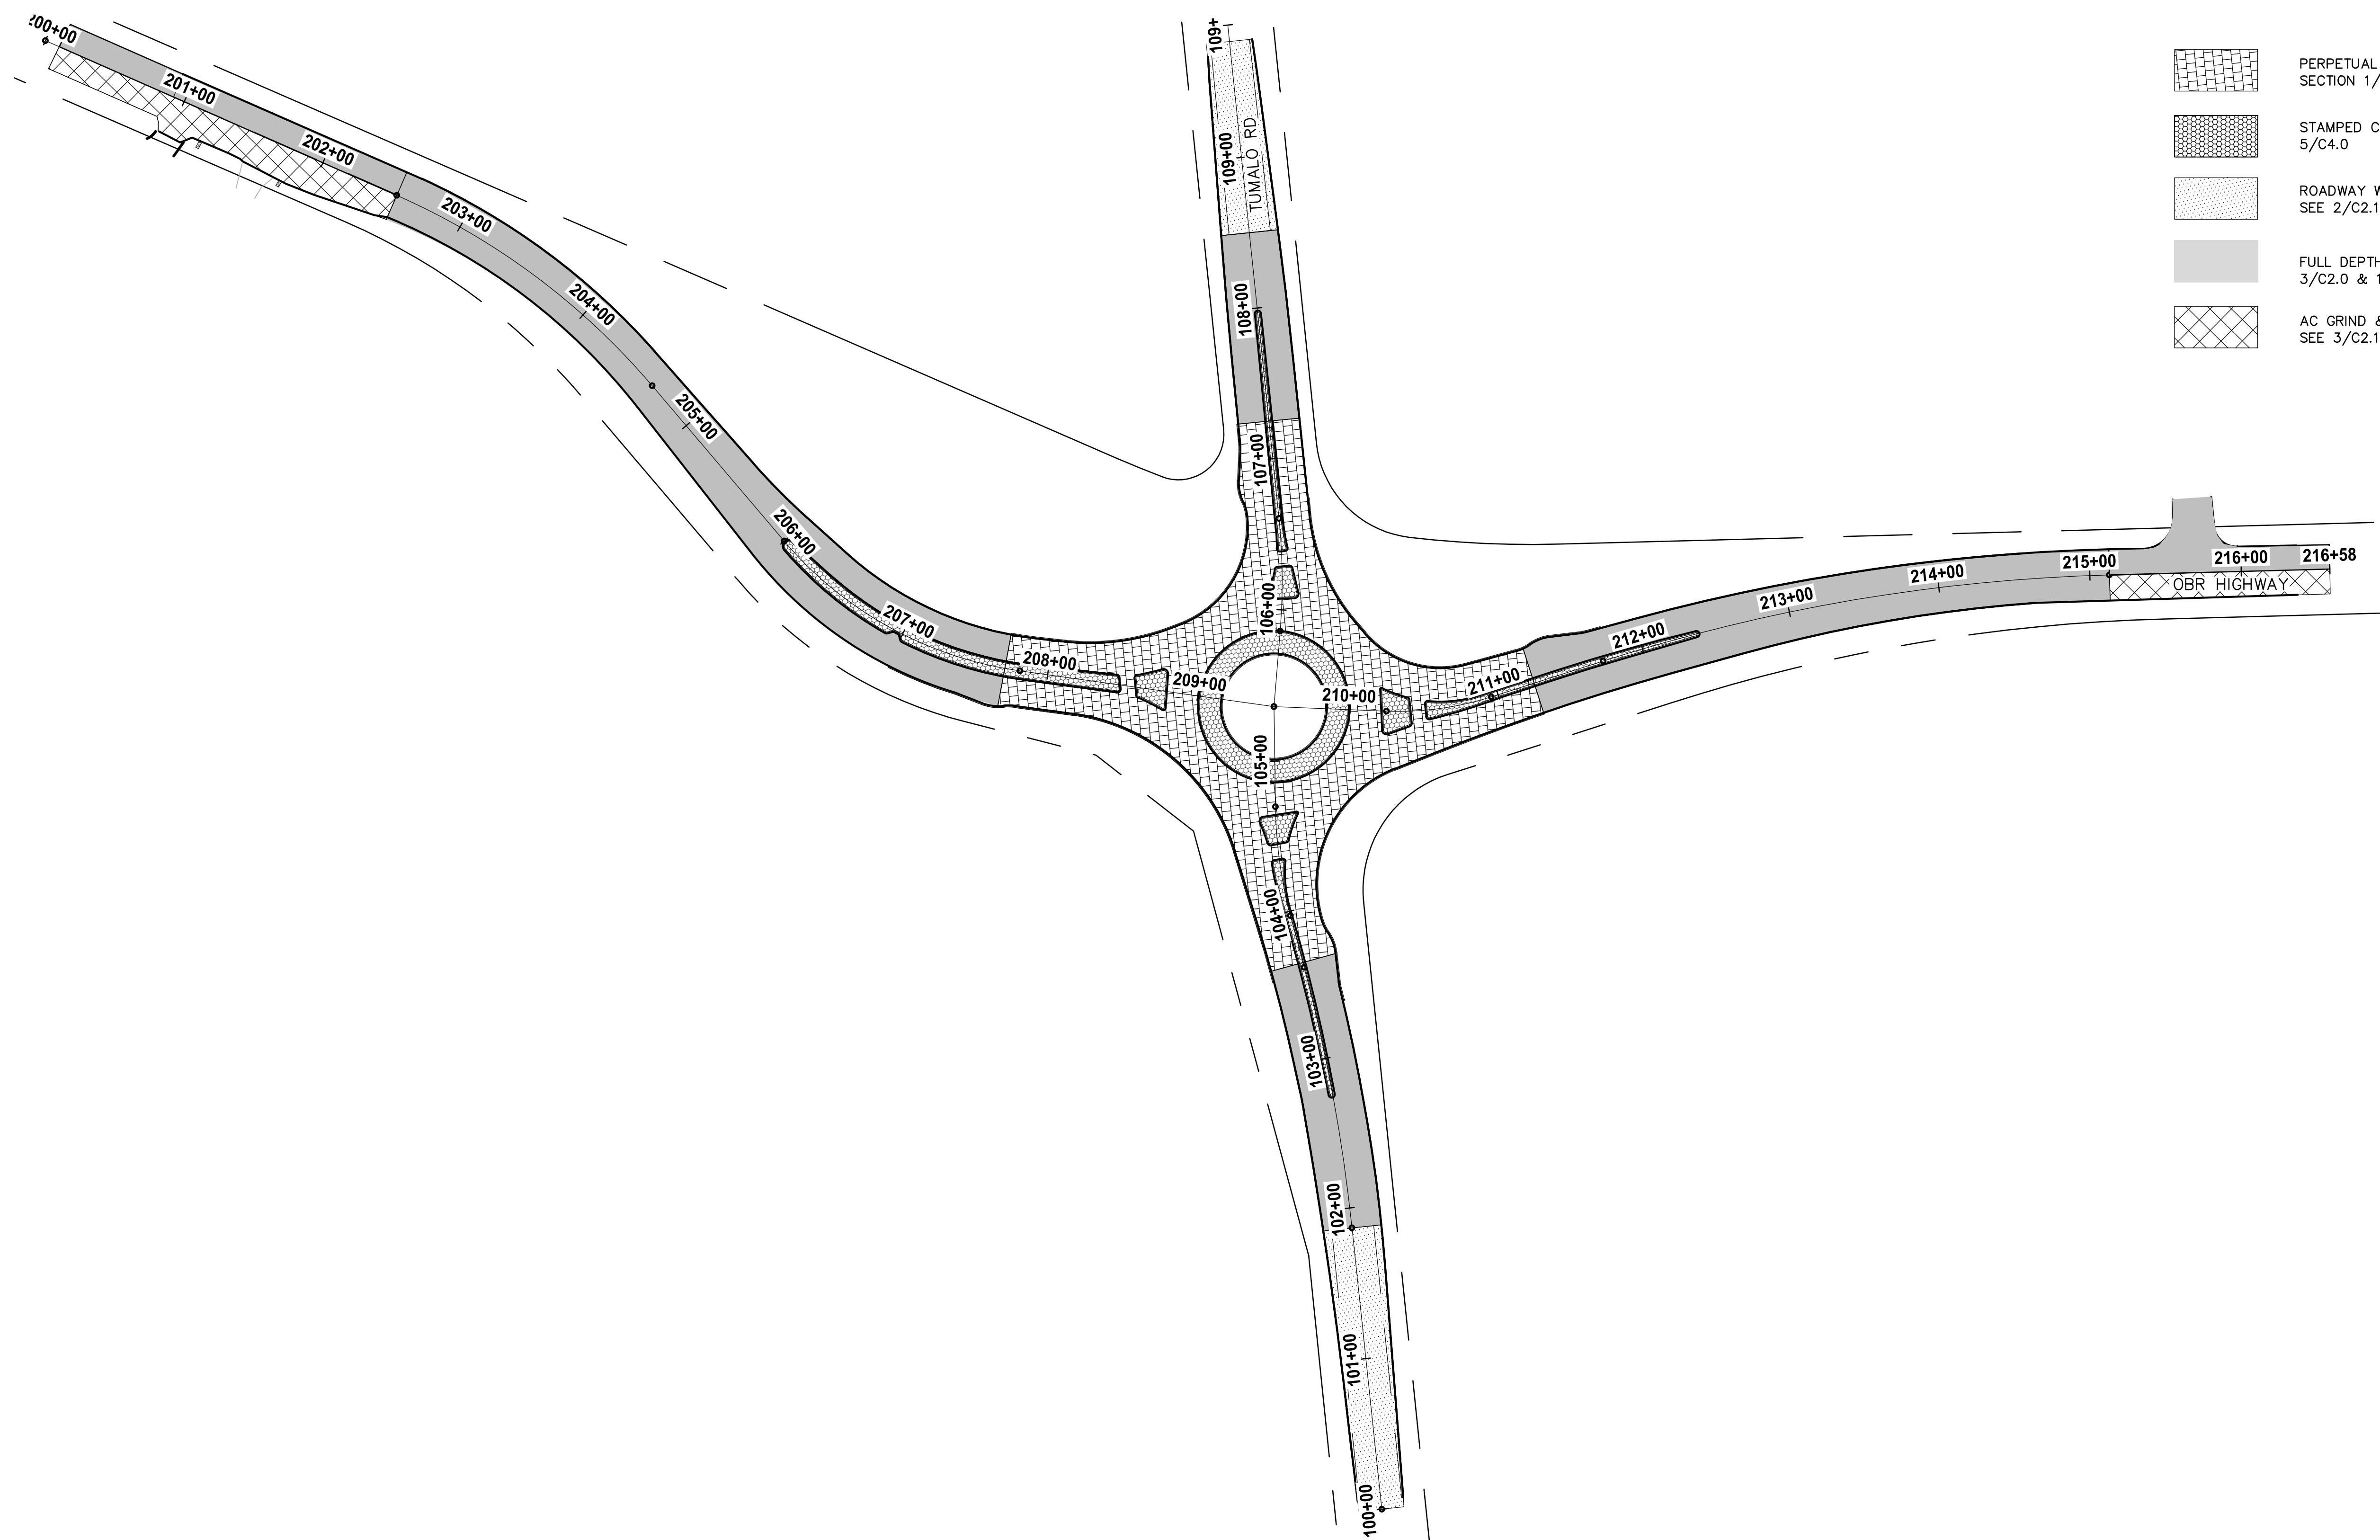LAYOUT: PAVING INDEX - SITE A PATH: U:\Bend\Projects\Clients\2509-Deschutes County\297-2509-005 OBRH Design Phase\995vets\CADD\DWG\TUMALO RD_RBA\CD'S PLOTTED BY: ricedav DATE: Monday, April 27, 2020 11:15:24 AM



-  PERPETUAL SECTION SEE TYPICAL SECTION 1/C2.0 & 2/C2.0
-  STAMPED CONCRETE SEE DETAIL 5/C4.0
-  ROADWAY WIDENING SECTION SEE 2/C2.1
-  FULL DEPTH CONSTRUCTION SEE 3/C2.0 & 1/C2.1
-  AC GRIND & INLAY SECTION SEE 3/C2.1

PAVING INDEX PLAN
SCALE IN FEET
0 60' 120'

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY
FILE NAME: BE2509005-C3.0-PI00
JOB No: 297-2509-005
DATE: 12/2019




PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS

FOR BIDDING REFERENCE ONLY

PAVING INDEX


DRAWING NO.
5 OF 43
C3.0

LAYOUT: C4.0 DETAILS
 PATH: U:\Bent\Projects\Clients\2509-deschutes\county\297-2509-005-cbth-design\phase\995\cadd\DWG\tumalo rd\rbat\CD'S
 PLOTTED BY: ricoddy DATE: Friday, April 3, 2020 9:27:14 AM

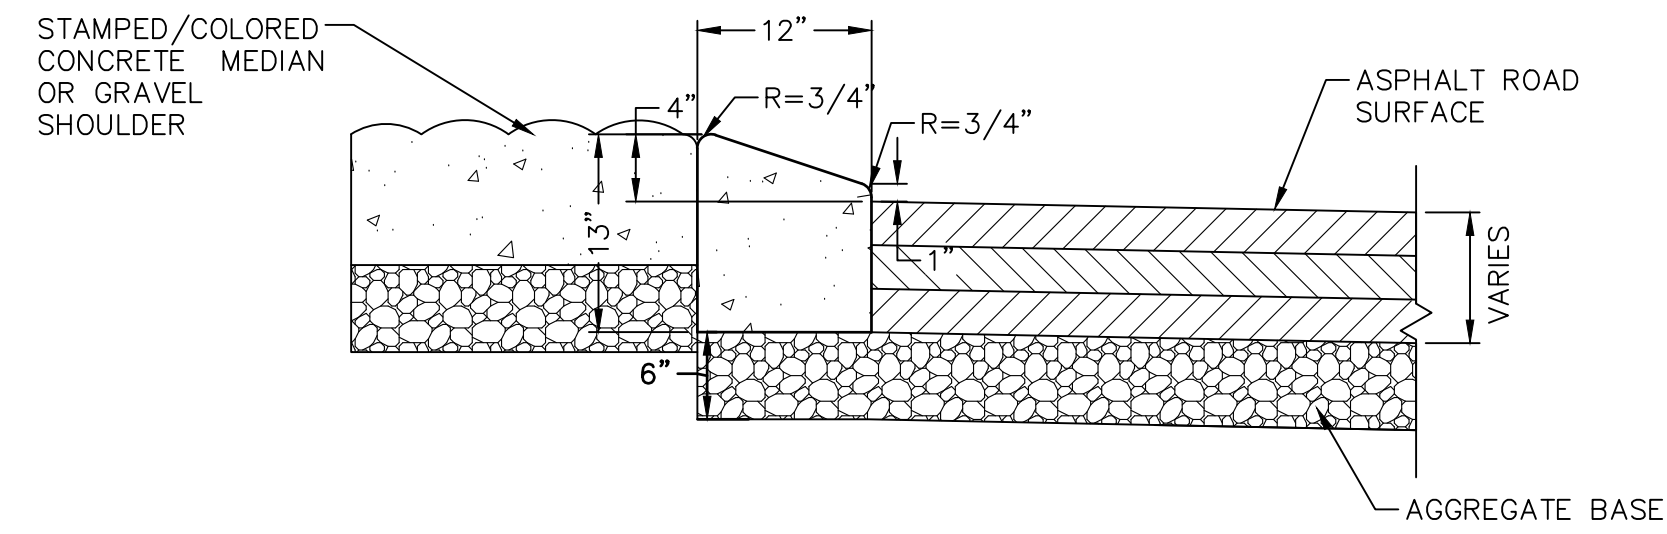


LOW PROFILE MOUNTABLE CURB
 N.T.S. **1**
 C4.0

NOTES:
 1. REFERENCE ODOT DWG RD700
 2. ALL CONCRETE SHALL BE 5000 PSI HIGH STRENGTH WITH FIBER REINFORCEMENT

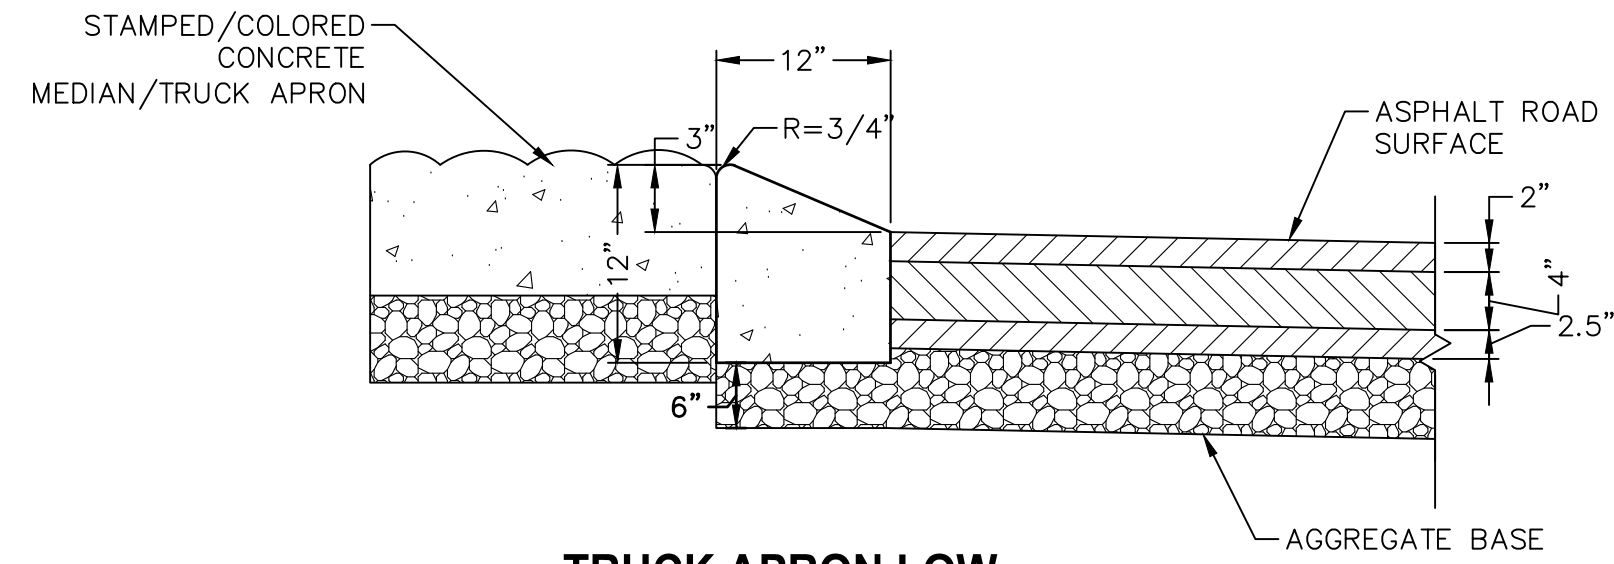


TRUCK APRON LOW PROFILE MOUNTABLE CURB
 N.T.S. **2**
 C4.0

NOTES:
 1. REFERENCE ODOT DRG RD700
 2. ALL CONCRETE SHALL BE 5000 PSI HIGH STRENGTH WITH FIBER REINFORCEMENT

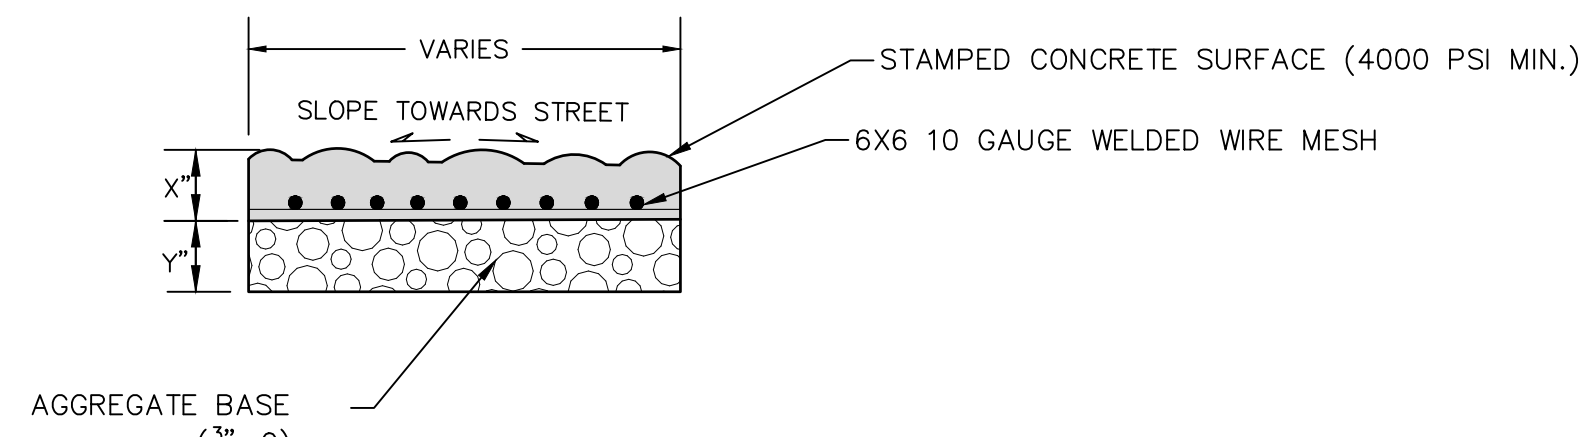




STAMPED CONCRETE
 N.T.S. **5**
 C4.0

X DIMENSION:
 - MEDIAN = 6"
 - TRUCK APRON = 8"
 Y DIMENSION:
 - MEDIAN = 6"
 - TRUCK APRON = 6"

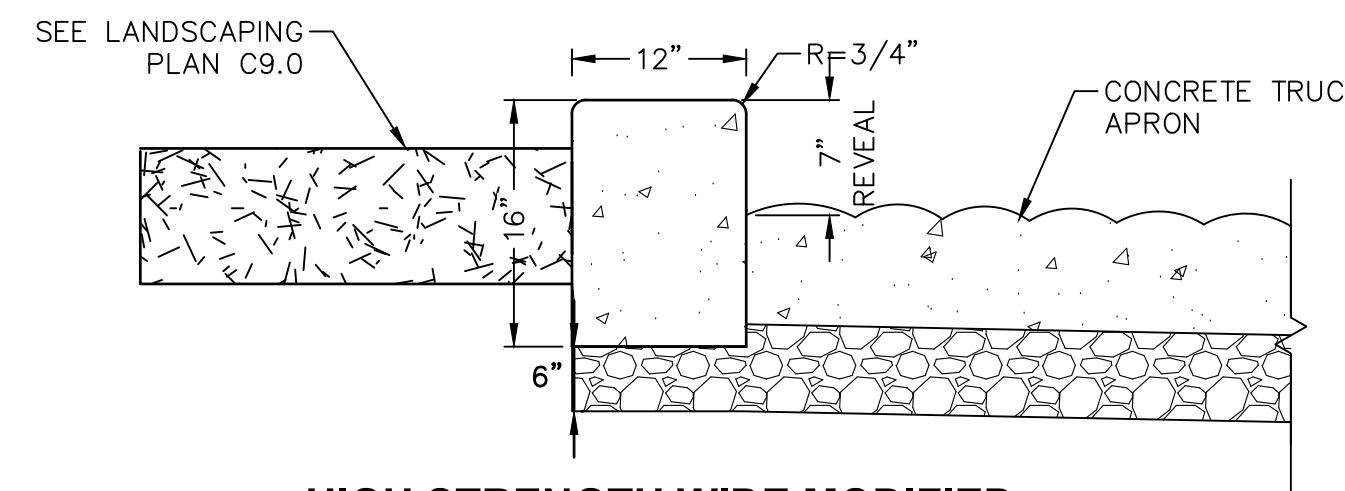


HIGH STRENGTH WIDE MODIFIED CURB INNER CURB
 N.T.S. **6**
 C4.0

NOTE: CONCRETE SHALL BE 5000 PSI HIGH STRENGTH WITH FIBER REINFORCEMENT

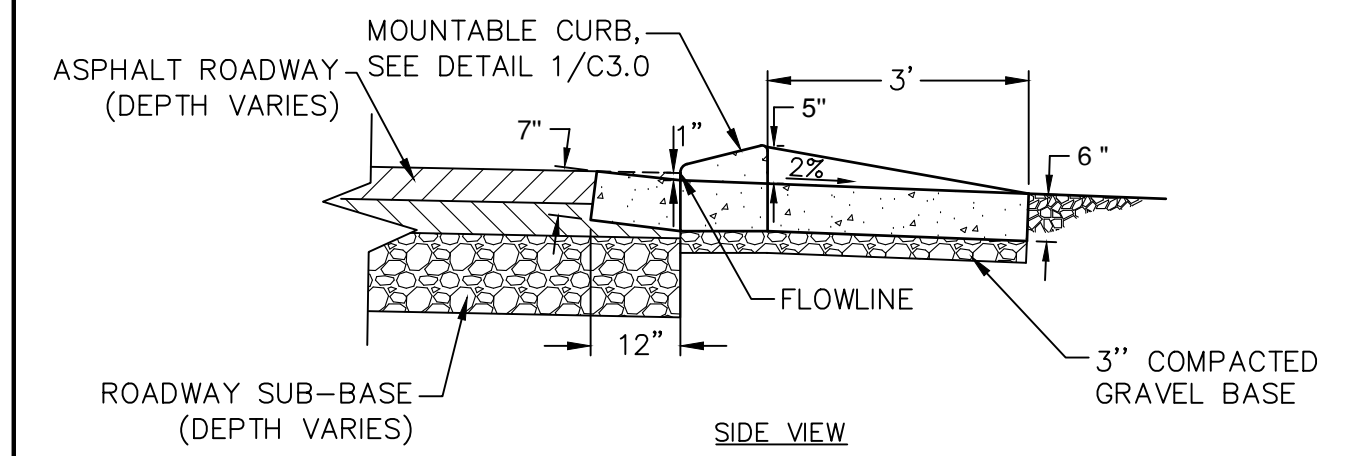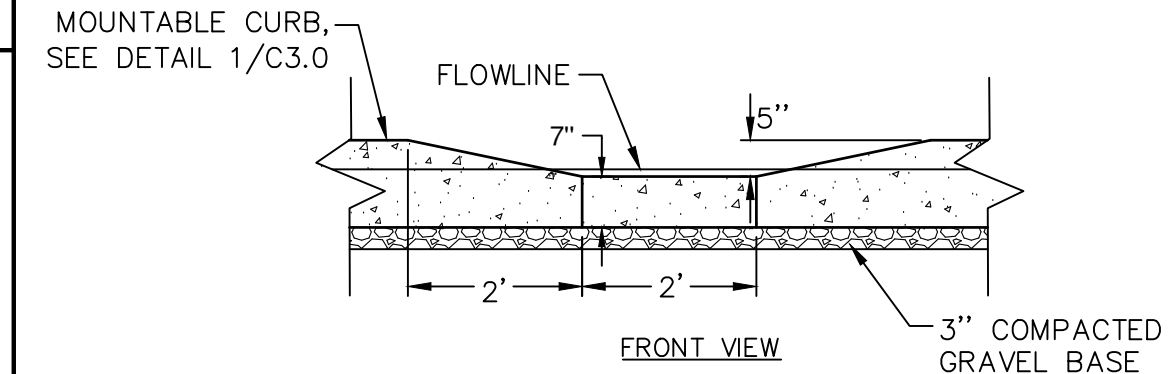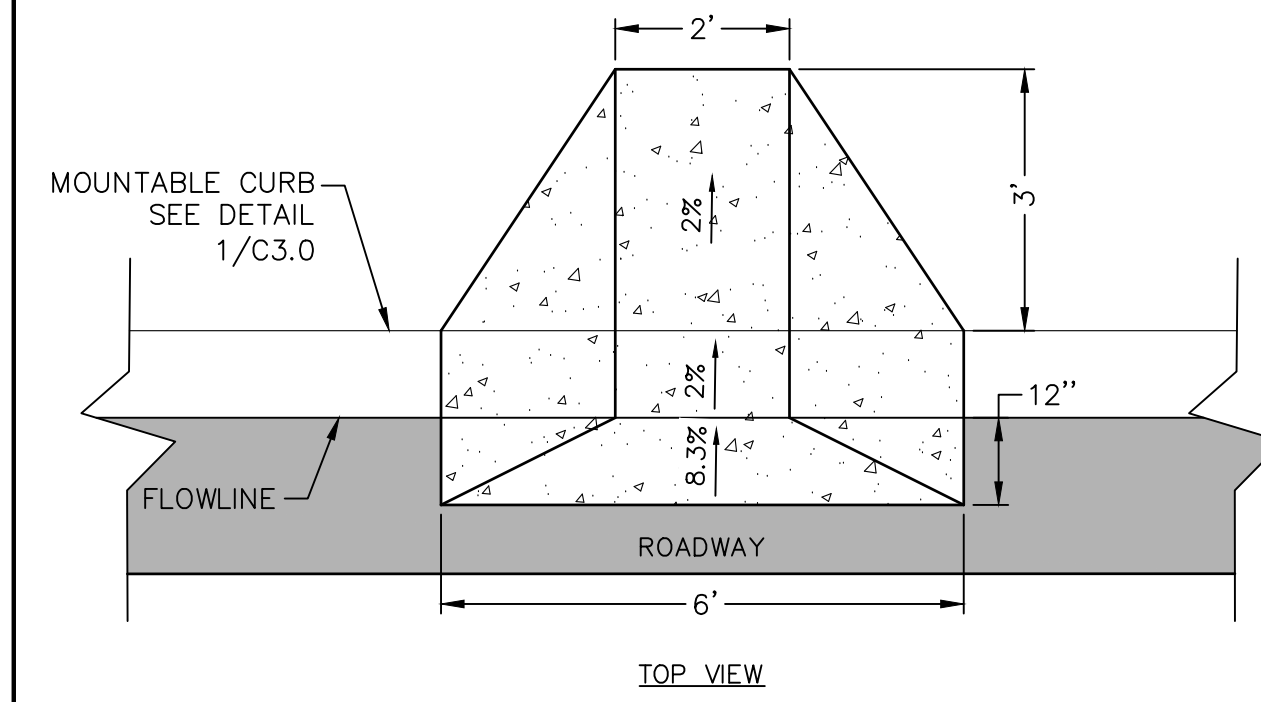


CURB CUT
 N.T.S. **9**
 C4.0

NOTE: ALL CONCRETE SHALL BE 5000 PSI HIGH STRENGTH WITH FIBER REINFORCEMENT

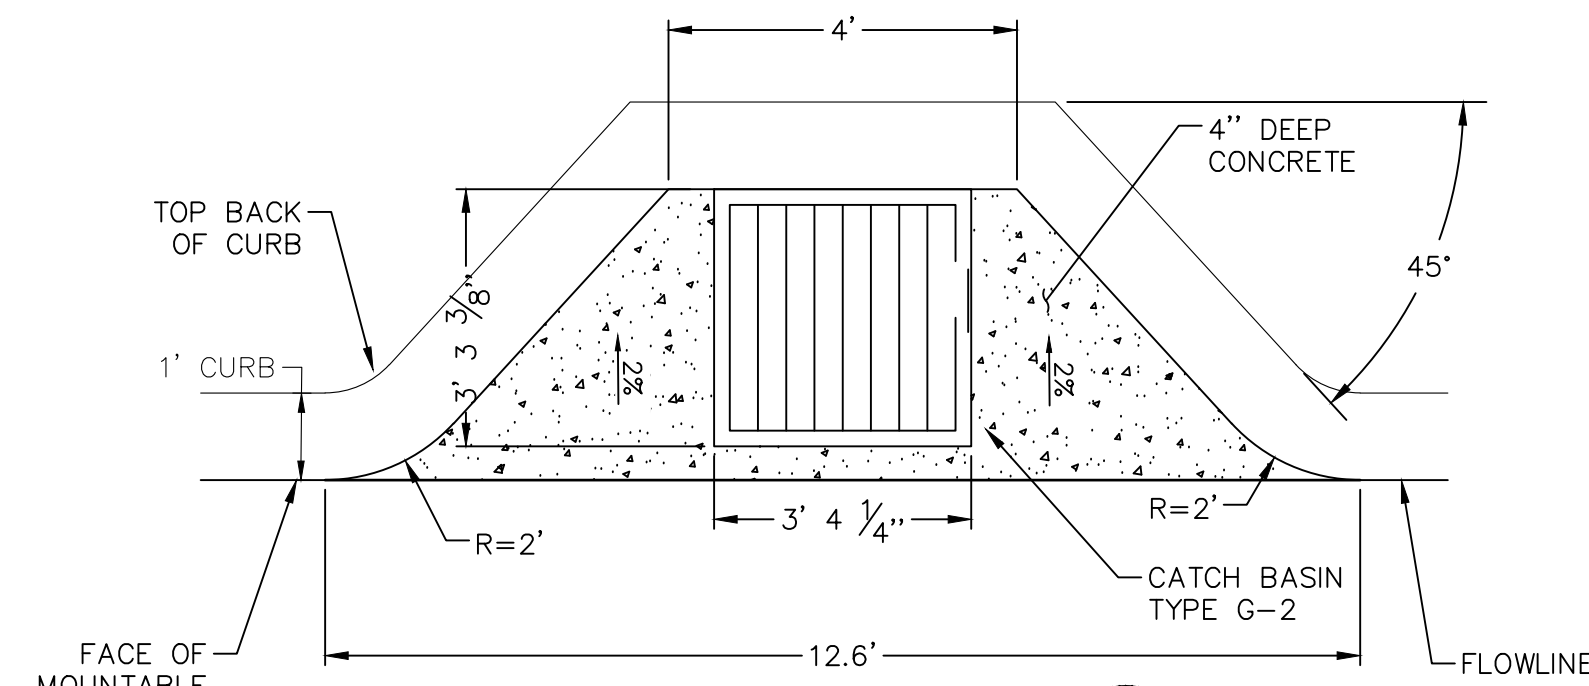


STORM INLET
 N.T.S. **3**
 C4.0


NOTE: ALL CONCRETE SHALL BE 5000 PSI HIGH STRENGTH WITH FIBER REINFORCEMENT

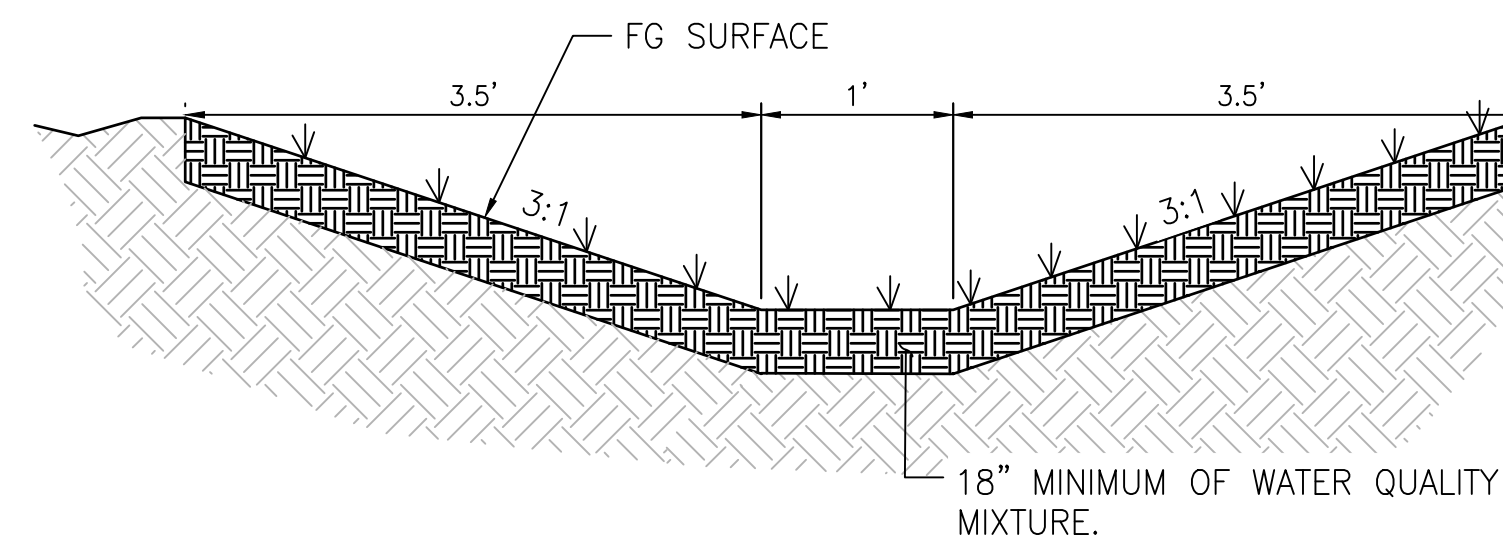

WATER QUALITY SWALE SECTION DETAIL
 N.T.S. **7**
 C4.0

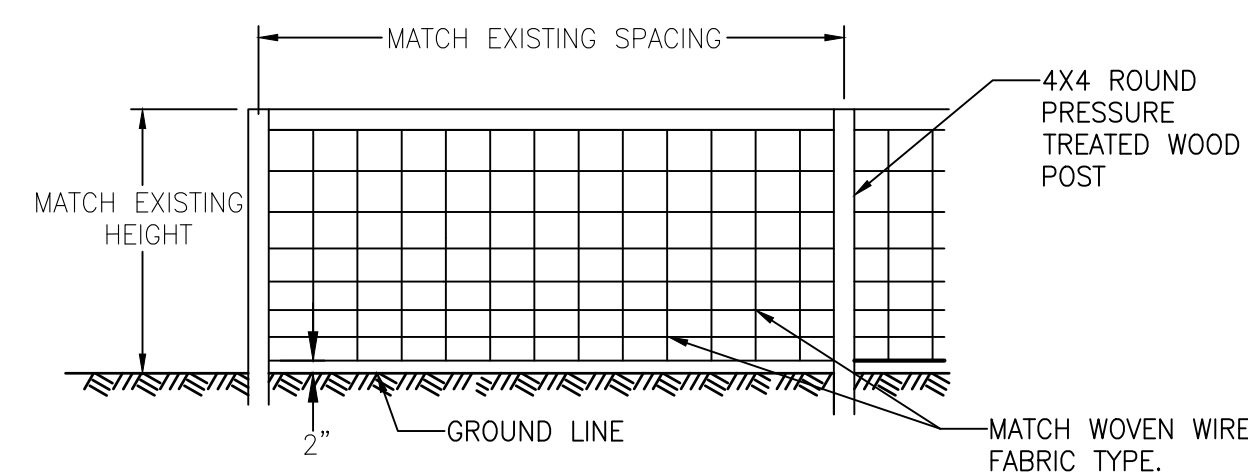

WOOD FENCE
 N.T.S. **4**
 C4.0

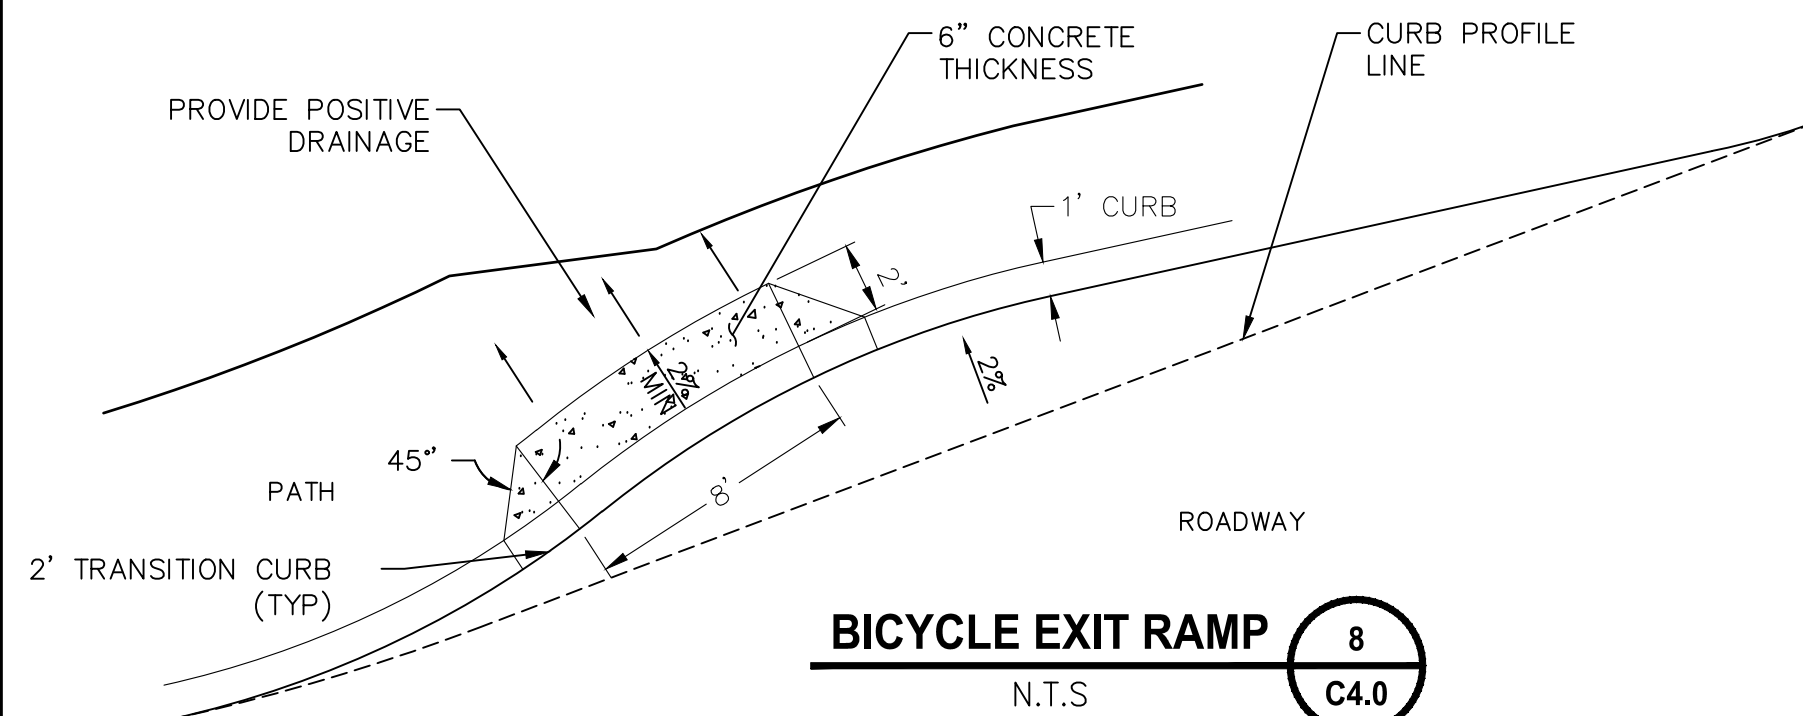


BICYCLE EXIT RAMP
 N.T.S. **8**
 C4.0

NOTE: ALL CONCRETE SHALL BE 5000 PSI HIGH STRENGTH WITH FIBER REINFORCEMENT

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY
 FILE NAME
 BE2509005-C4.0-DT00
 JOB No.
 297-2509-005
 DATE
 12/2019


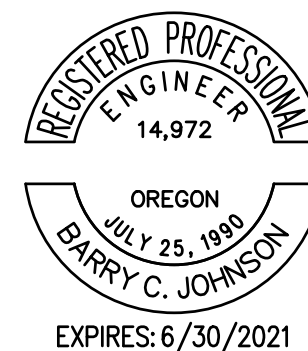


PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS

DETAILS

DRAWING NO.
 6 OF 43
C4.0

LAYOUT: C5.0 DEMO - SITE A - 1 PATH: \\parametrix.com\pmx\Bend\Projects\Clients\2509-Deschutes County\297-2509-005 OBRI Design Phase\995vcs\CAED\DWG\TUMALO RD RBA\CD'S PLOTTED BY: ricsdav DATE: Thursday, June 4, 2020 5:57:13 PM

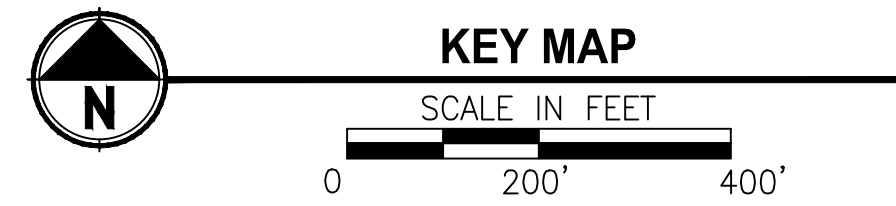
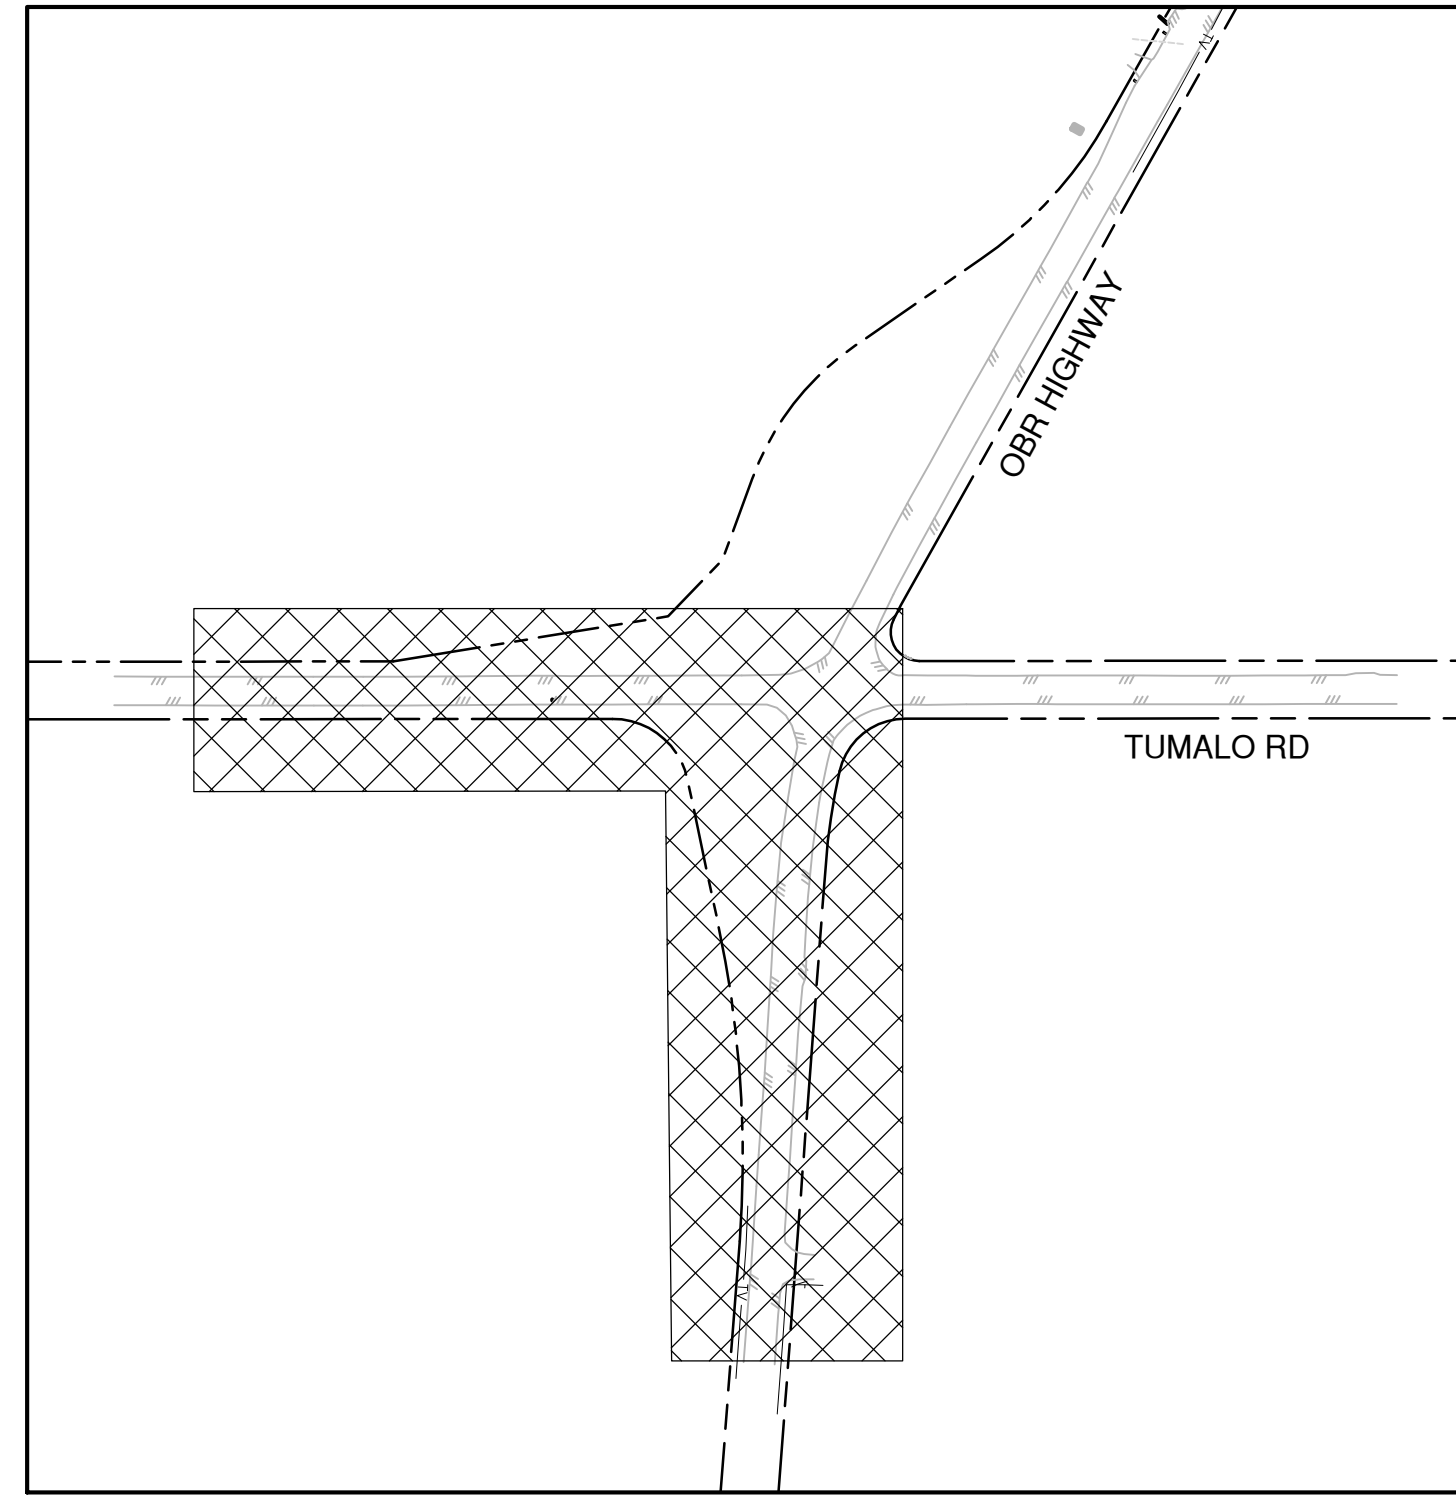


DEMO NOTES:

- ① SAWCUT EXISTING ASPHALT
- ② EXISTING CMP PIPE, PROTECT IN PLACE
- ③ STA 104+33 TO STA 214+94
REMOVE FENCE - APPROX. 610 LF
- ④ EXISTING POWER POLE, PROTECT IN PLACE
- ⑤ EXISTING TRANSFORMER, PROTECT IN PLACE
- ⑥ EXISTING TELEPHONE PEDESTAL, PROTECT IN PLACE
- ⑦ EXISTING POWER POLE TO BE REMOVED
(BY OTHERS)
- ⑧ REMOVE AND DISPOSE OF EXISTING FLASHING BEACON
- ⑨ EXISTING TELEPHONE PEDESTAL, TO BE RELOCATED
(BY OTHERS)

DEMO LEGEND:

- REMOVE AC SURFACING AND BASE ROCK TO SUB GRADE
- REMOVE EXISTING TREE (LOCATED TREES ARE 6" DBH AND LARGER. SMALLER TREES NOT SHOWN MAY REQUIRE REMOVAL)
- REMOVE EXISTING FENCE

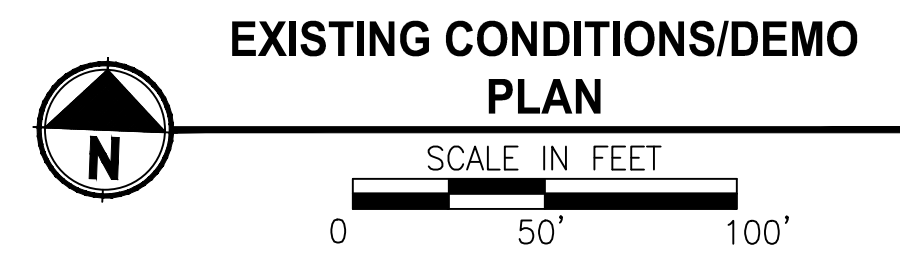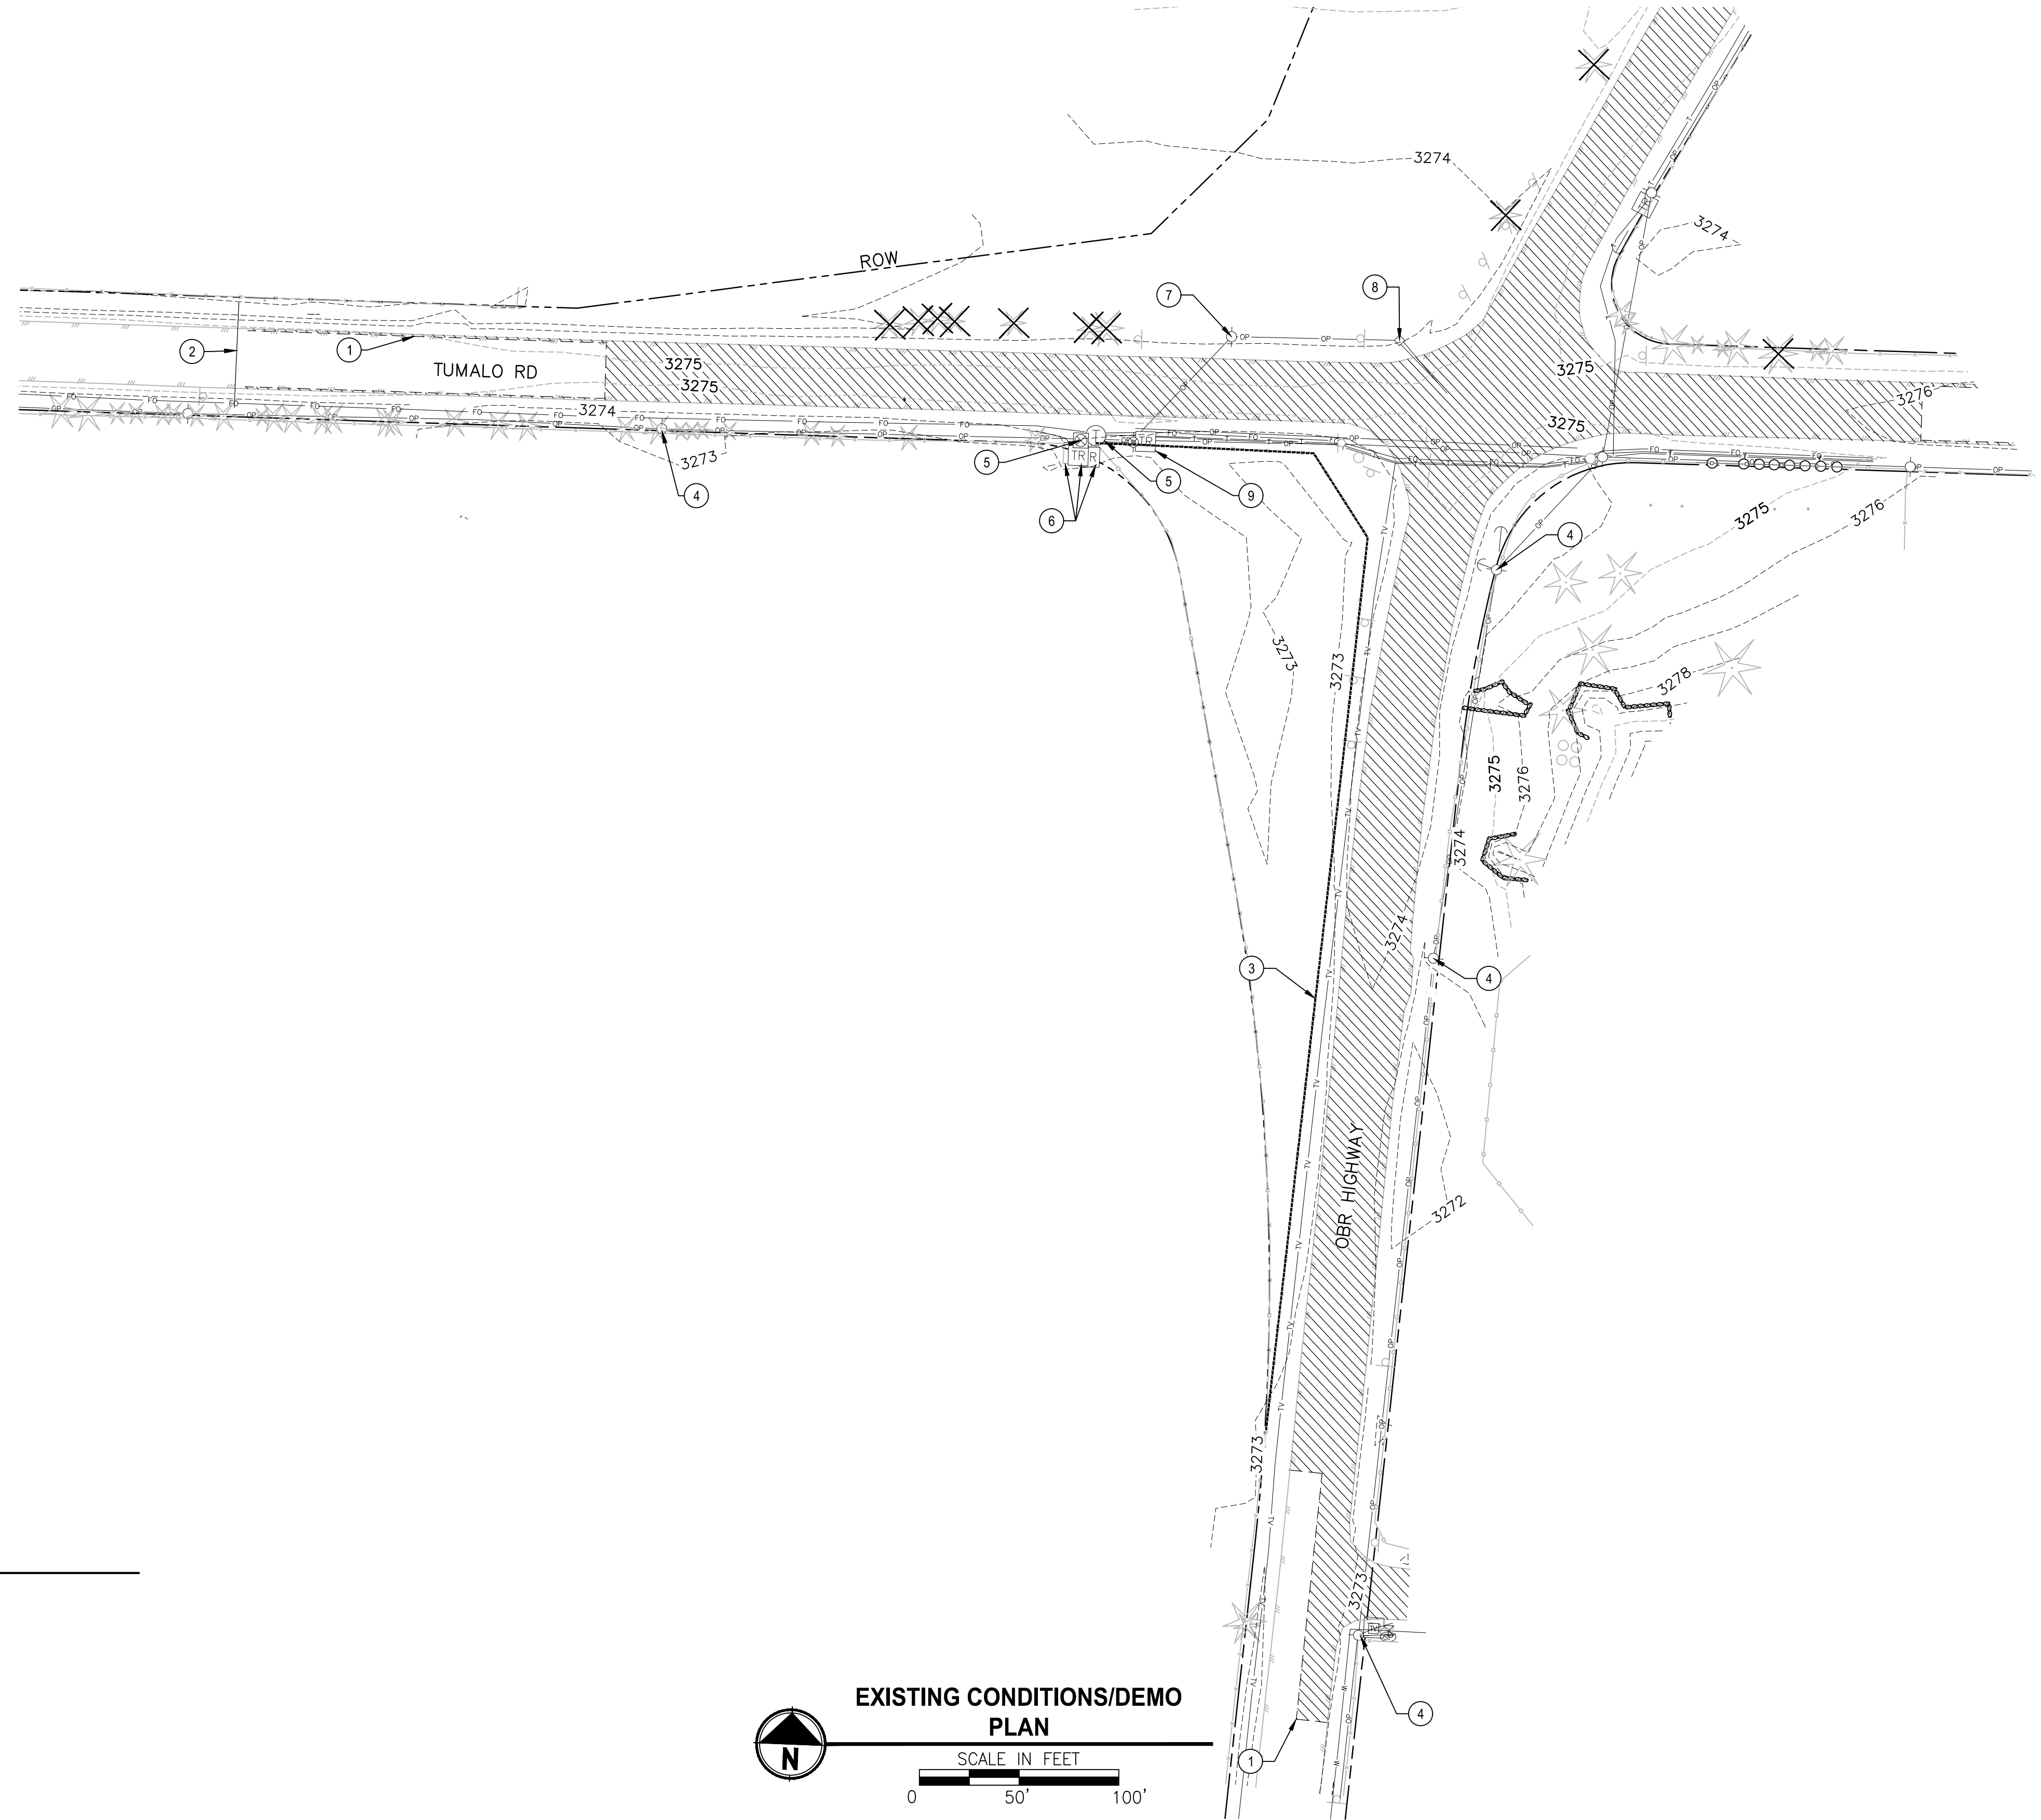

FOR BIDDING REFERENCE ONLY


| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | DR |
| | | | DRAWN |
| | | | DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

ONE INCH AT FULL SCALE.
IF NOT, SCALE ACCORDINGLY

FILE NAME
BE2509005-C5.0-DE

JOB No.
297-2509-005

DATE
05/2020

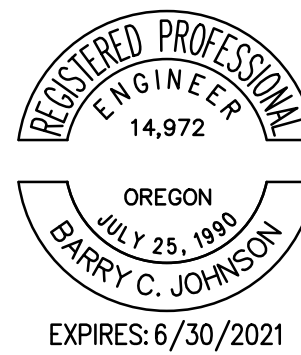

PROJECT NAME



**TUMALO RD / TUMALO PL
INTERSECTION IMPROVEMENTS**

EXISTING CONDITIONS-DEMO PLAN

DRAWING NO.
7 OF 39

C5.0

LAYOUT: DEMO - SITE A - 2 PATH: \\parametrix.com\pmx\Bend\Projects\Clients\2509-005-OBRI\Design\Phase\995\cs\CADD\DWG\TUMALO RD RBA\CD'S PLOTTED BY: ricodav DATE: Thursday, June 4, 2020 5:46:30 PM

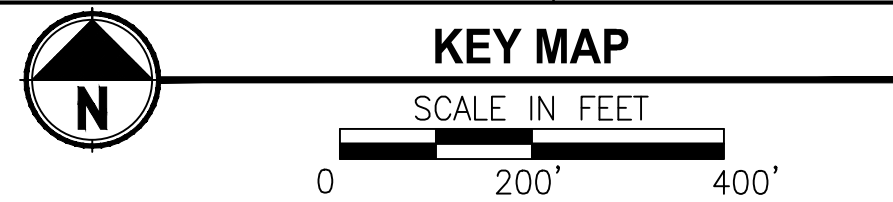
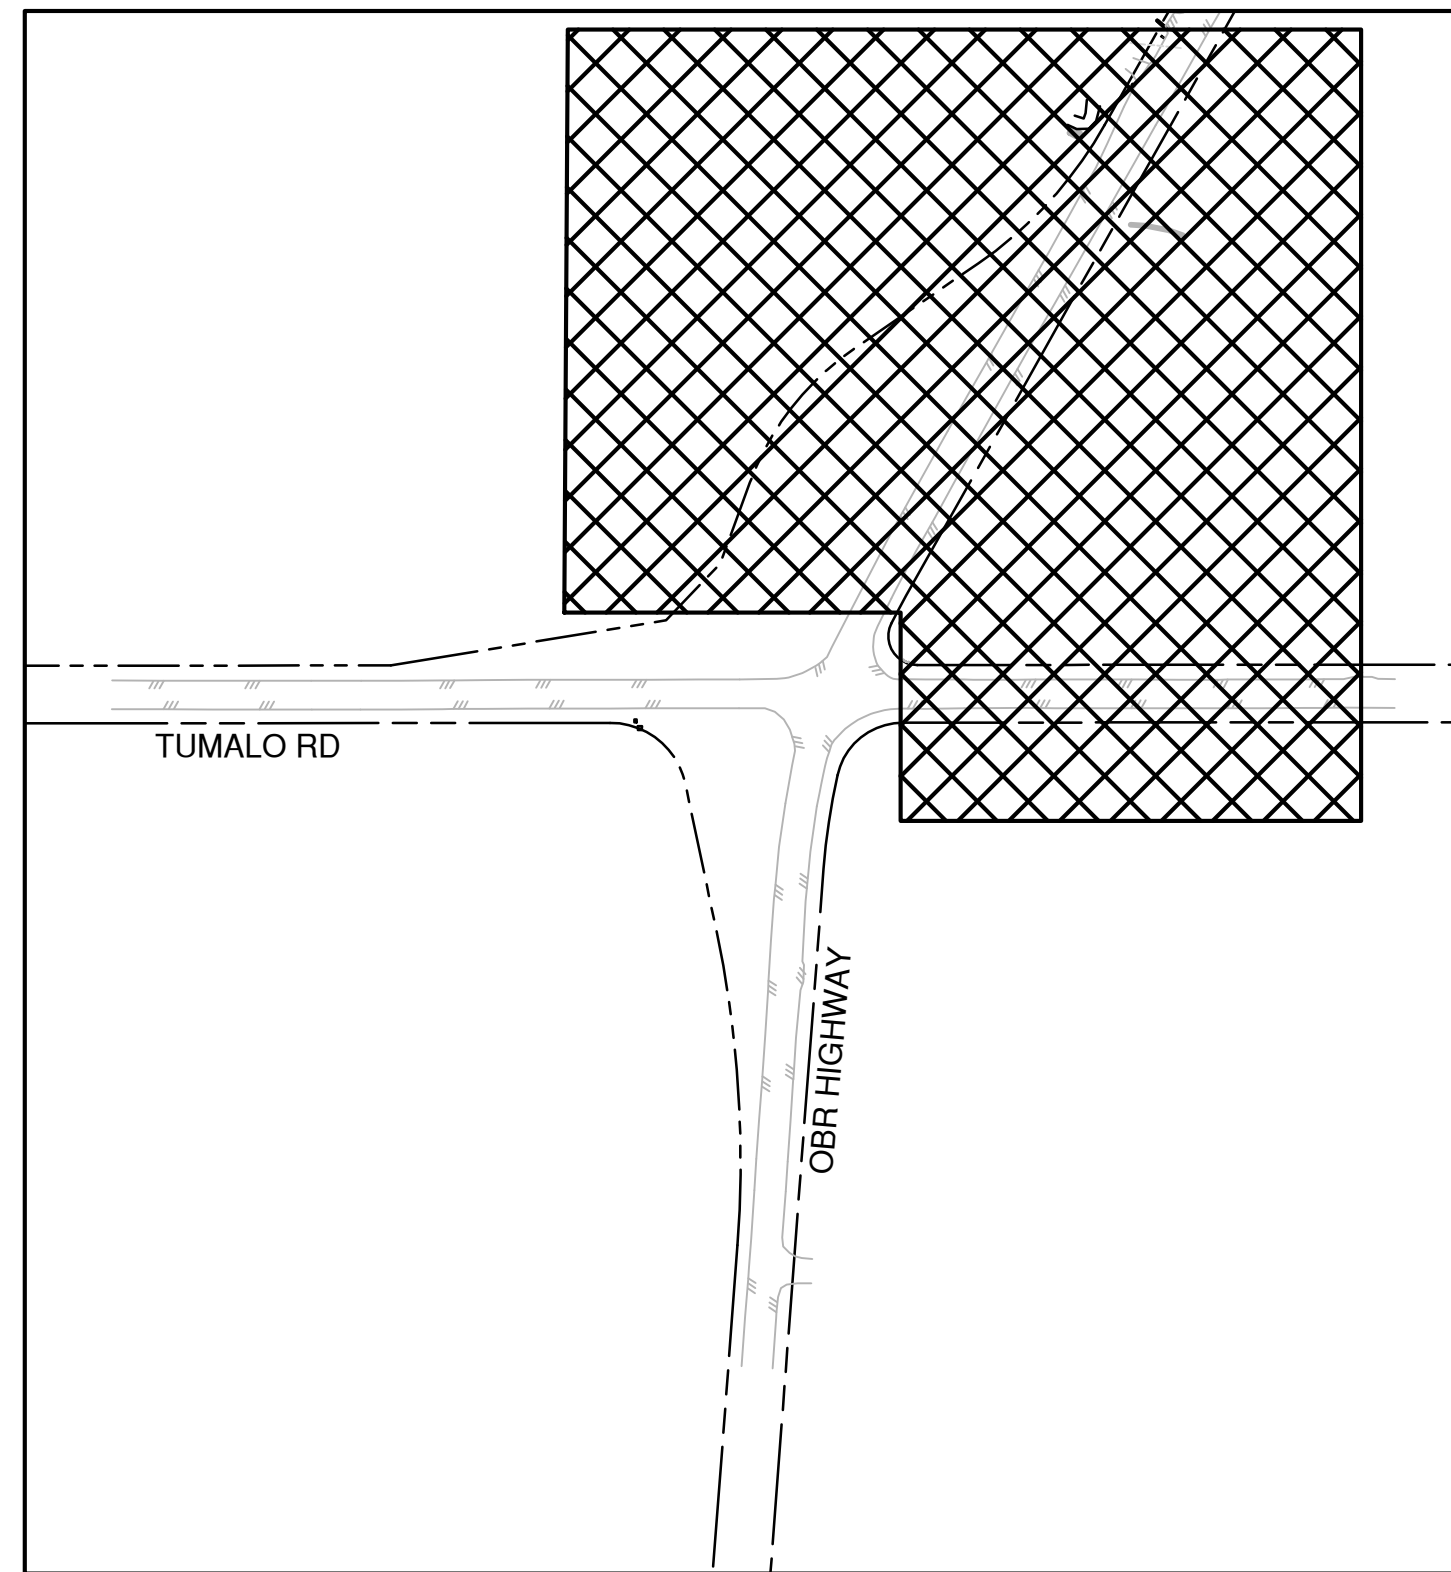


DEMO NOTES:

- ① SAWCUT EXISTING ASPHALT
- ② EXISTING BOLLARDS, PROTECT IN PLACE
- ③ EXISTING POWER POLE, PROTECT IN PLACE
- ④ EXISTING UNDERGROUND TELEPHONE LINE, PROTECT IN PLACE
- ⑤ EXISTING UNDERGROUND FIBER OPTIC LINE, PROTECT IN PLACE
- ⑥ EXISTING TELEPHONE PEDESTAL, PROTECT IN PLACE
- ⑦ EXISTING POWER TRANSFORMER, PROTECT IN PLACE
- ⑧ EXISTING PUMP HOUSE AND CONTROL PANEL, PROTECT IN PLACE
- ⑨ EXISTING MAILBOX, PROTECT IN PLACE
- ⑩ REMOVE FENCE (AS NEEDED)
- ⑪ REMOVE AND DISPOSE OF EXISTING 4" IRRIGATION PIPE. SALVAGE PIPE FITTINGS AND VALVES.

DEMO LEGEND:


- REMOVE AC SURFACING AND BASE ROCK TO SUB GRADE
- REMOVE EXISTING TREE (LOCATED TREES ARE 6" DBH AND LARGER. SMALLER TREES NOT SHOWN MAY REQUIRE REMOVAL)
- REMOVE EXISTING FENCE

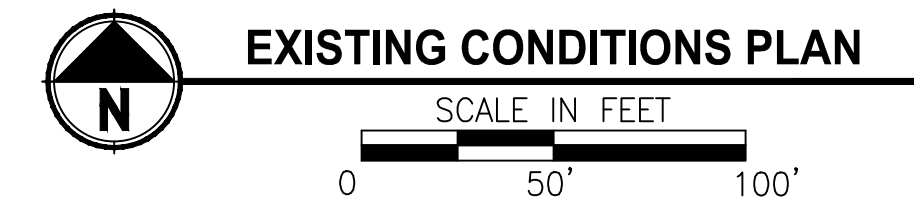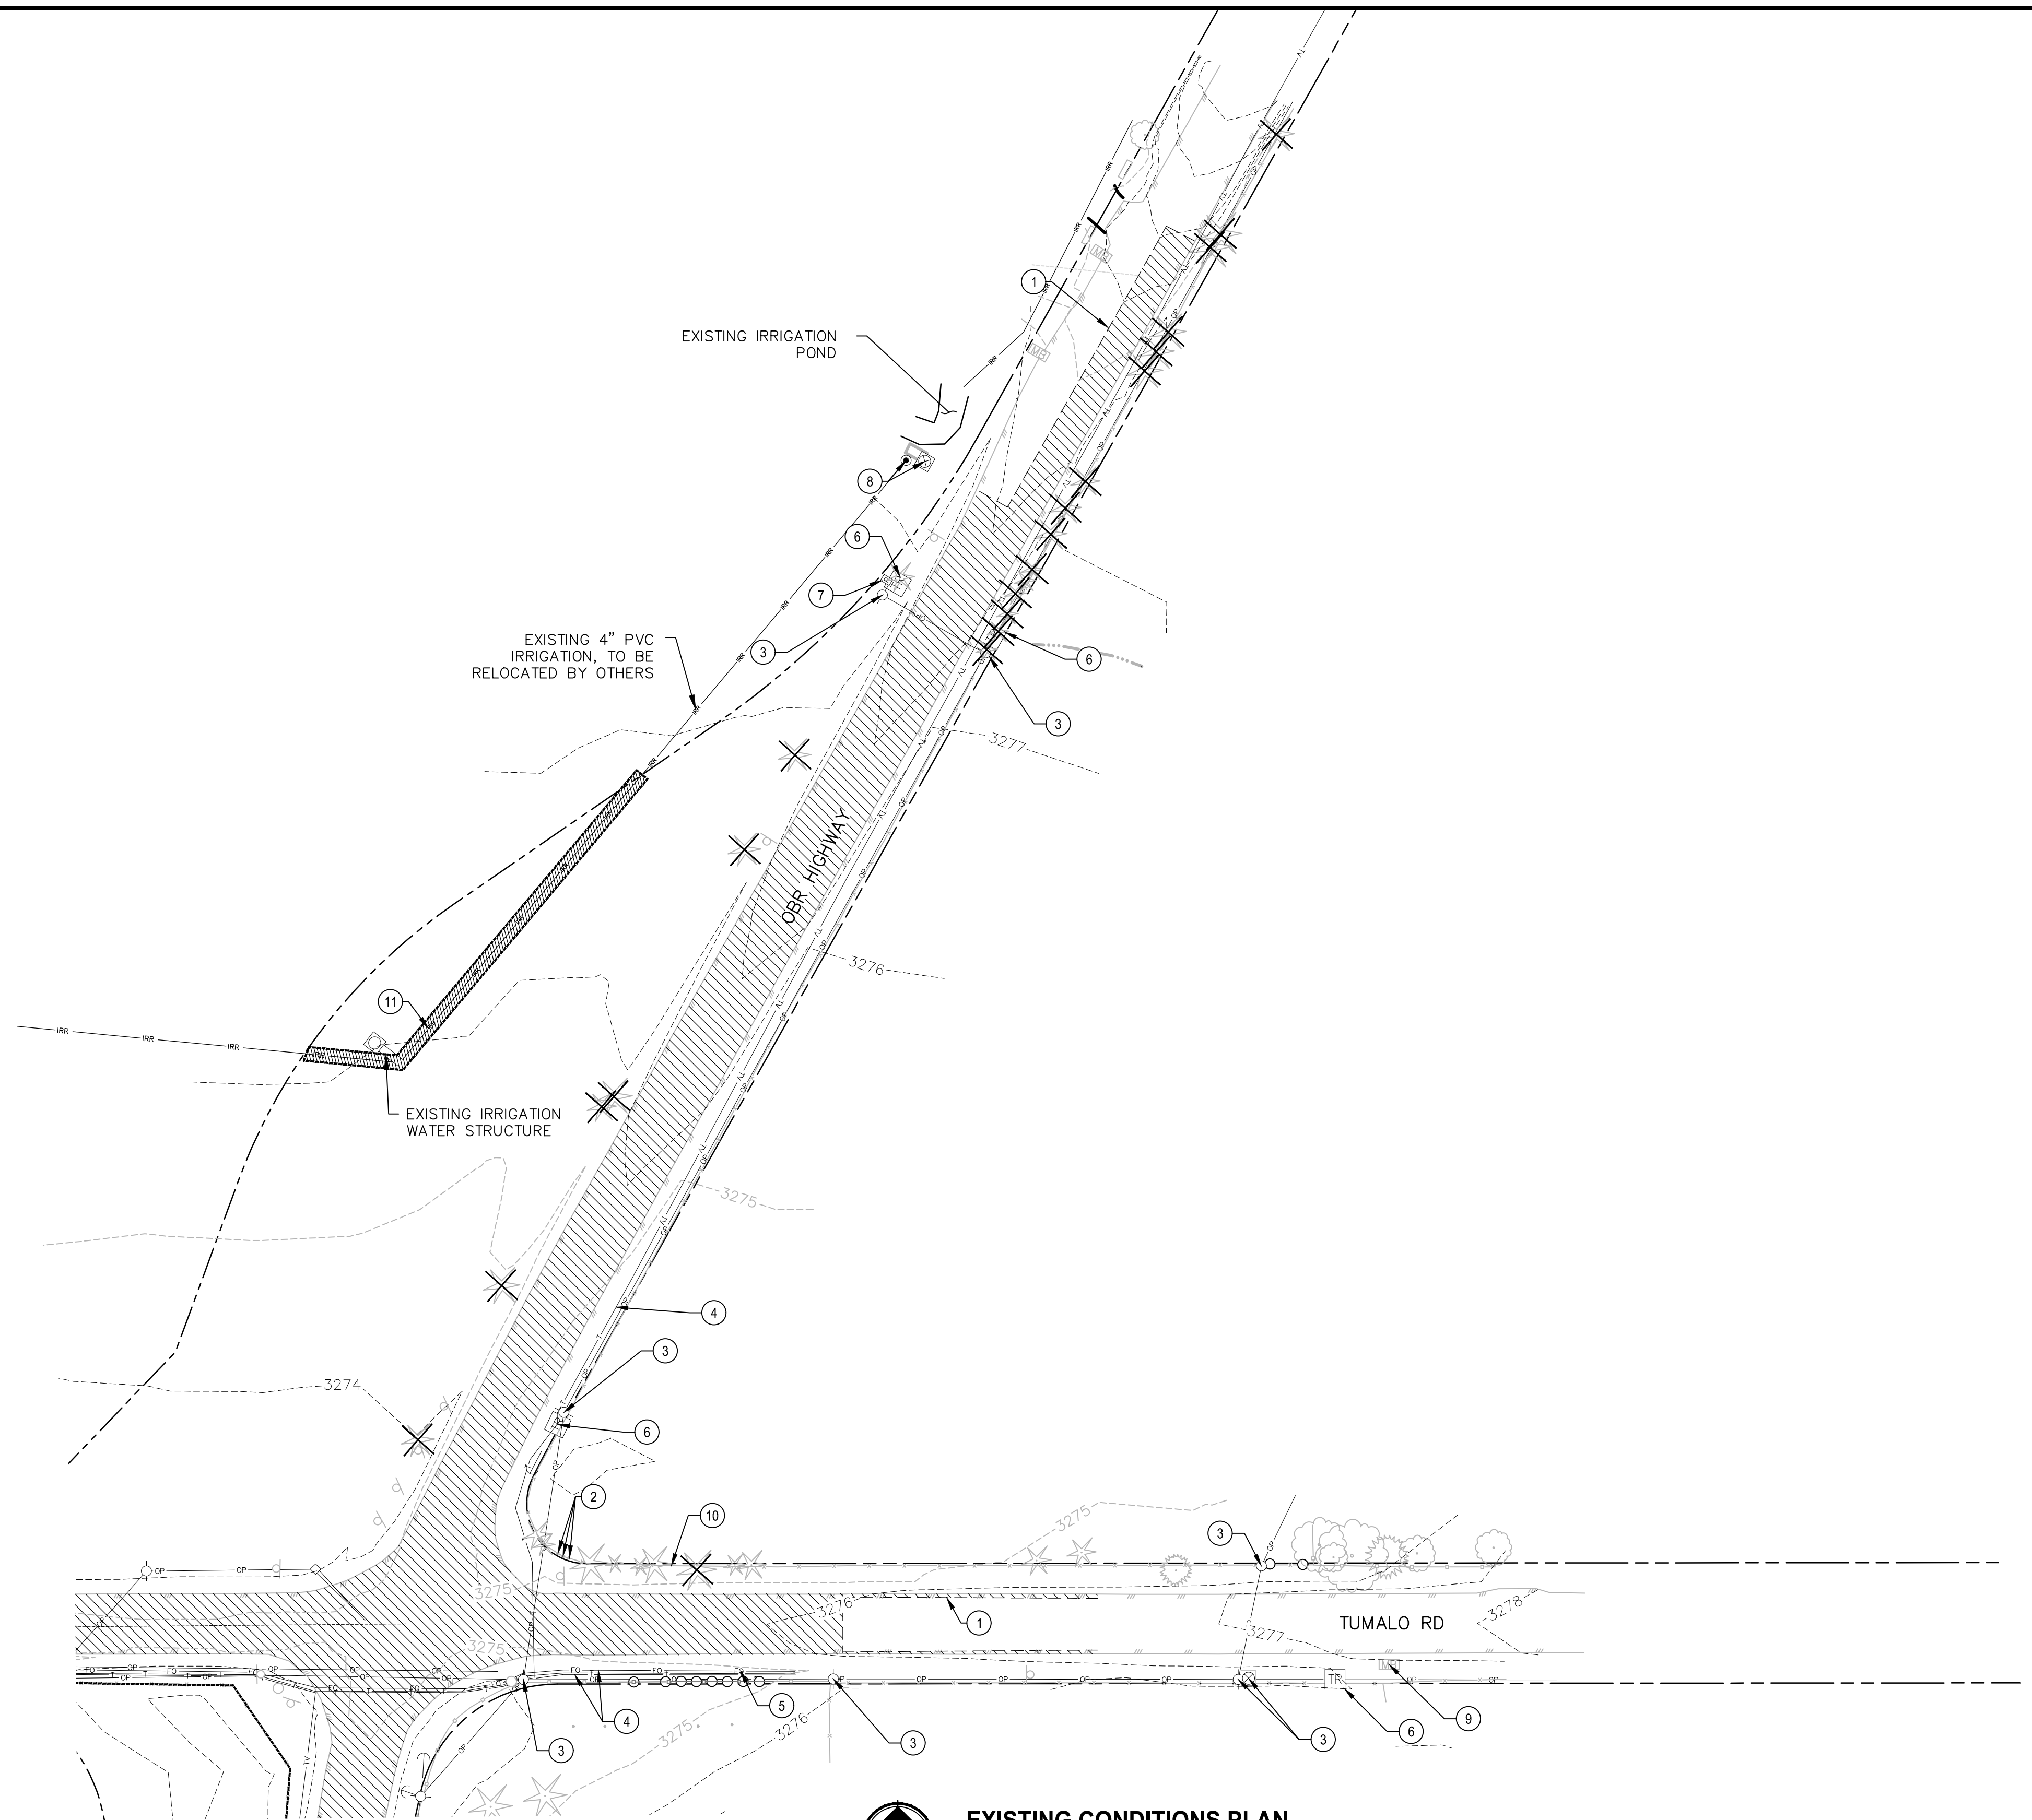

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED DR |
|-----------|------|----|--------------|
| | | | DRAWN DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY
 FILE NAME: BE2509005-C5.0-DE
 JOB No: 297-2509-005
 DATE: 05/2020

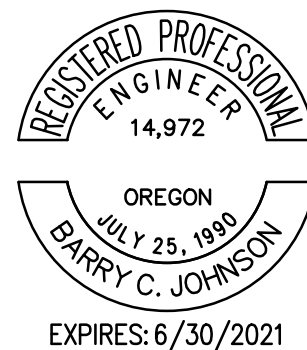


PROJECT NAME
TUMALO RD / TUMALO PL INTERSECTION IMPROVEMENTS

EXISTING CONDITIONS-DEMO PLAN

DRAWING NO.
 8 OF 39
C5.1


LAYOUT: C6.0 GEOMETRY PLAN - SITE A PATH: U:\Bend\Projects\Clients\2509-deschutes county\297-2509-005 sbrn design phase\995svca\CADD\DWG\tumalo rd\boa\CD'S PLOTTED BY: ricedav DATE: Friday, April 3, 2020 9:27:34 AM

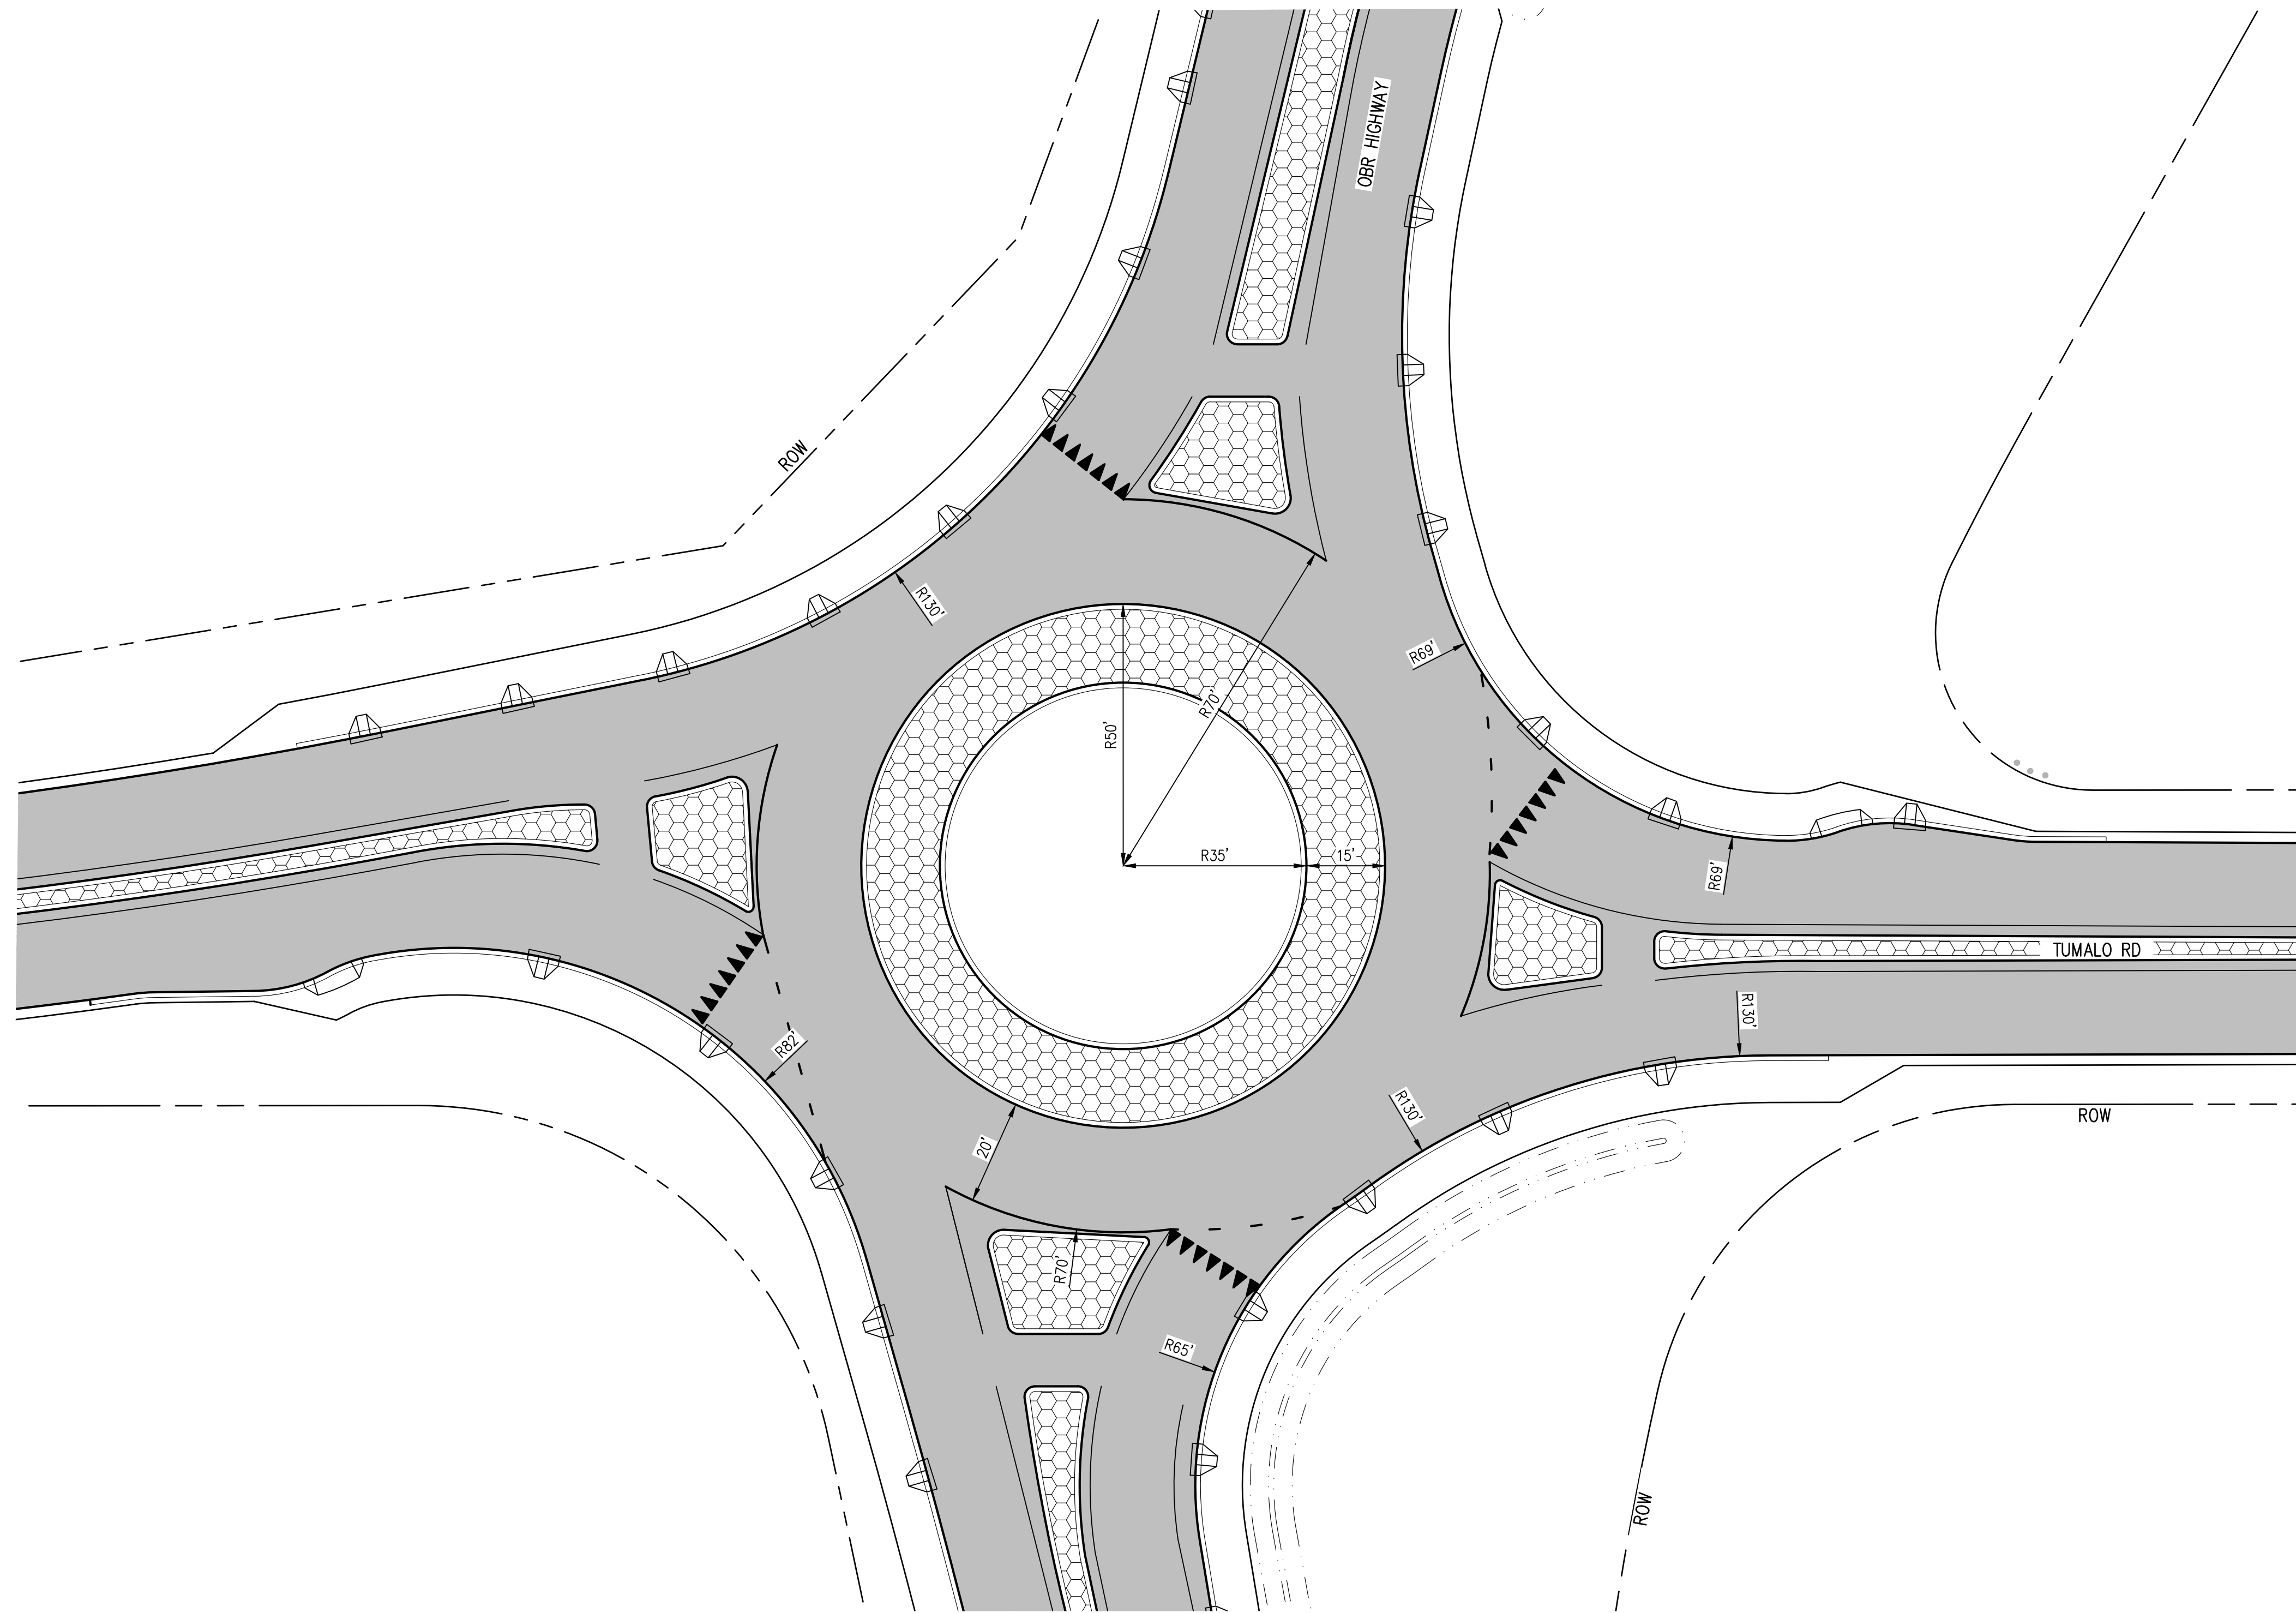

GEOMETRY PLAN
SCALE IN FEET
0 20' 40'

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | DR |
| | | | DRAWN |
| | | | DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

**ONE INCH AT FULL SCALE.
IF NOT, SCALE ACCORDINGLY**
FILE NAME
BE2509005-C6.0-G000
JOB No.
297-2509-005
DATE
12/2019




PROJECT NAME
**OLD BEND-REDMOND
HIGHWAY/ TUMALO RD
INTERSECTION IMPROVEMENTS**

FOR BIDDING REFERENCE ONLY
GEOMETRY PLAN

DRAWING NO.
9 OF 43
C6.0


LAYOUT: C7.0 SITE A - PLAN & PROFILE PATH: U:\Bent\Projects\Clients\2509-deschutes county\297-2509-005 cbrh design phase\995\ca\DD\DWG\tumalo rd rca\CD5 PLOTTED BY: ricodav DATE: Friday, April 3, 2020 9:42:12 AM

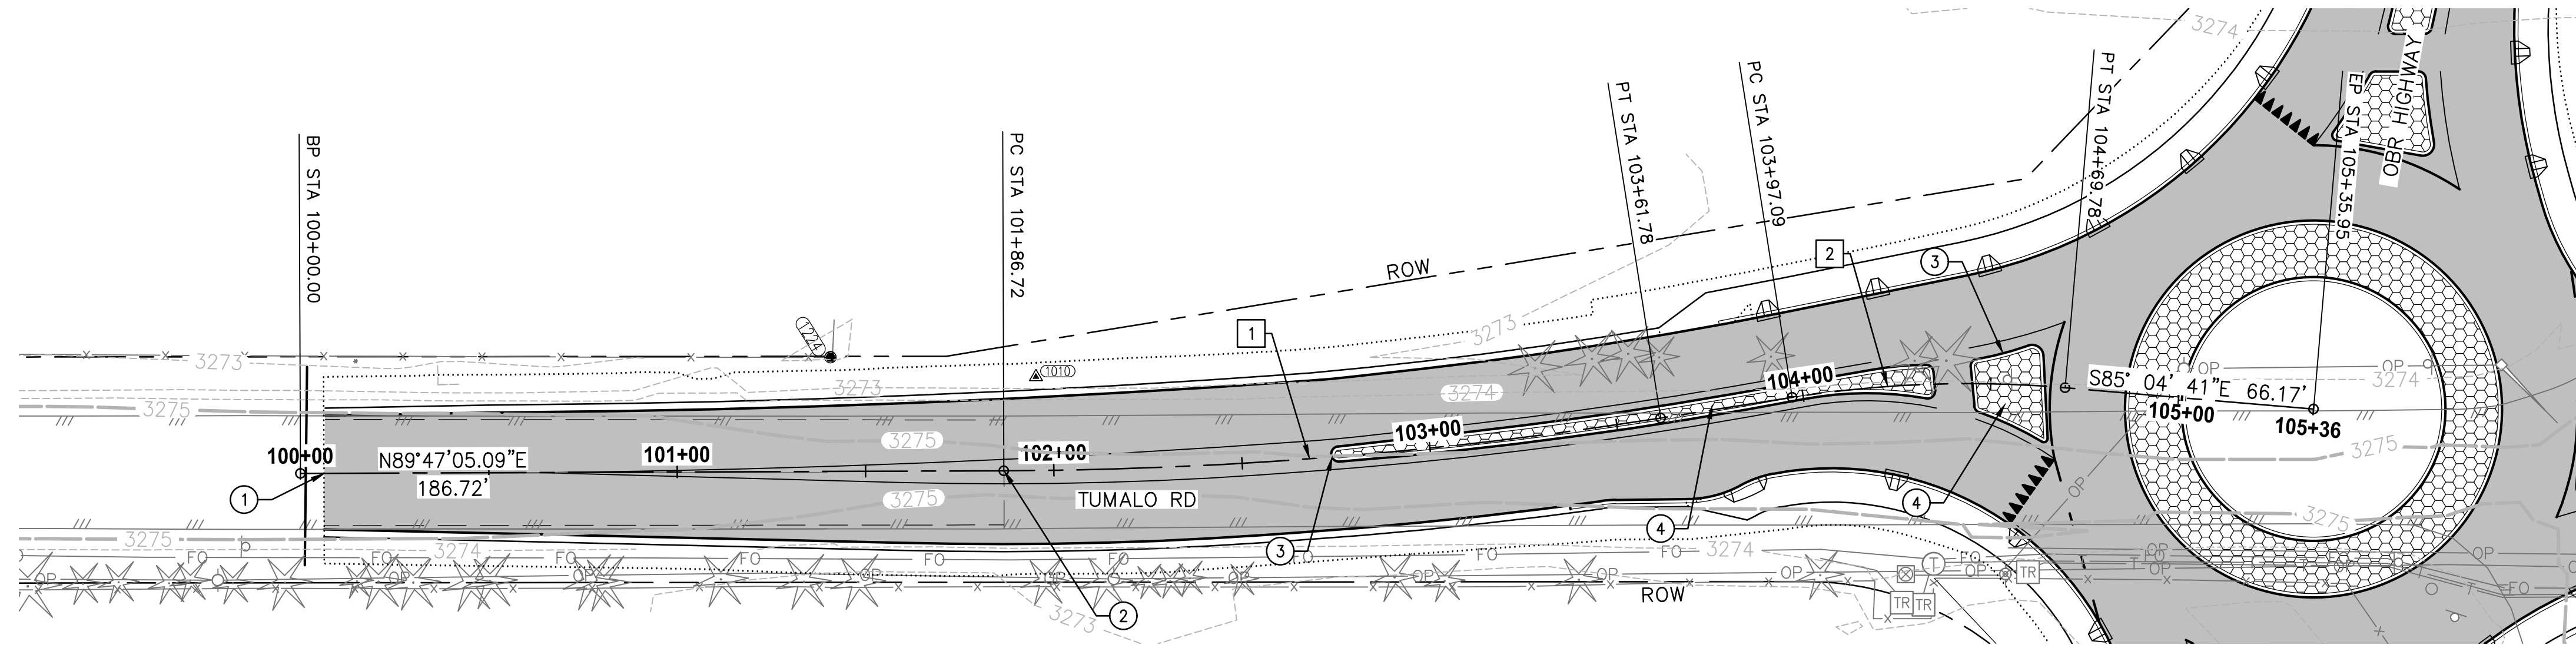

WEST LEG PLAN
SCALE IN FEET
0 30' 60'

- ROAD CONSTRUCTION NOTES:**
- ① BEGIN ROAD CONSTRUCTION STA:100+06.2
 - ② BEGIN FULL DEPTH CONSTRUCTION STA:101+88.7
 - ③ CONSTRUCT HIGH STRENGTH LOW PROFILE MOUNTABLE CURB SEE DETAIL 1/C4.0 AND 1/C7.5
 - ④ CONSTRUCT STAMPED COLORED CONCRETE MEDIAN SEE DETAIL 5/C4.0

| CURVE TABLE | | | |
|-------------|---------|----------|-----------|
| CURVE ID | LENGTH | RADIUS | DELTA |
| 1 | 175.05' | 1147.00' | 8°44'39" |
| 2 | 72.68' | 300.00' | 13°52'53" |

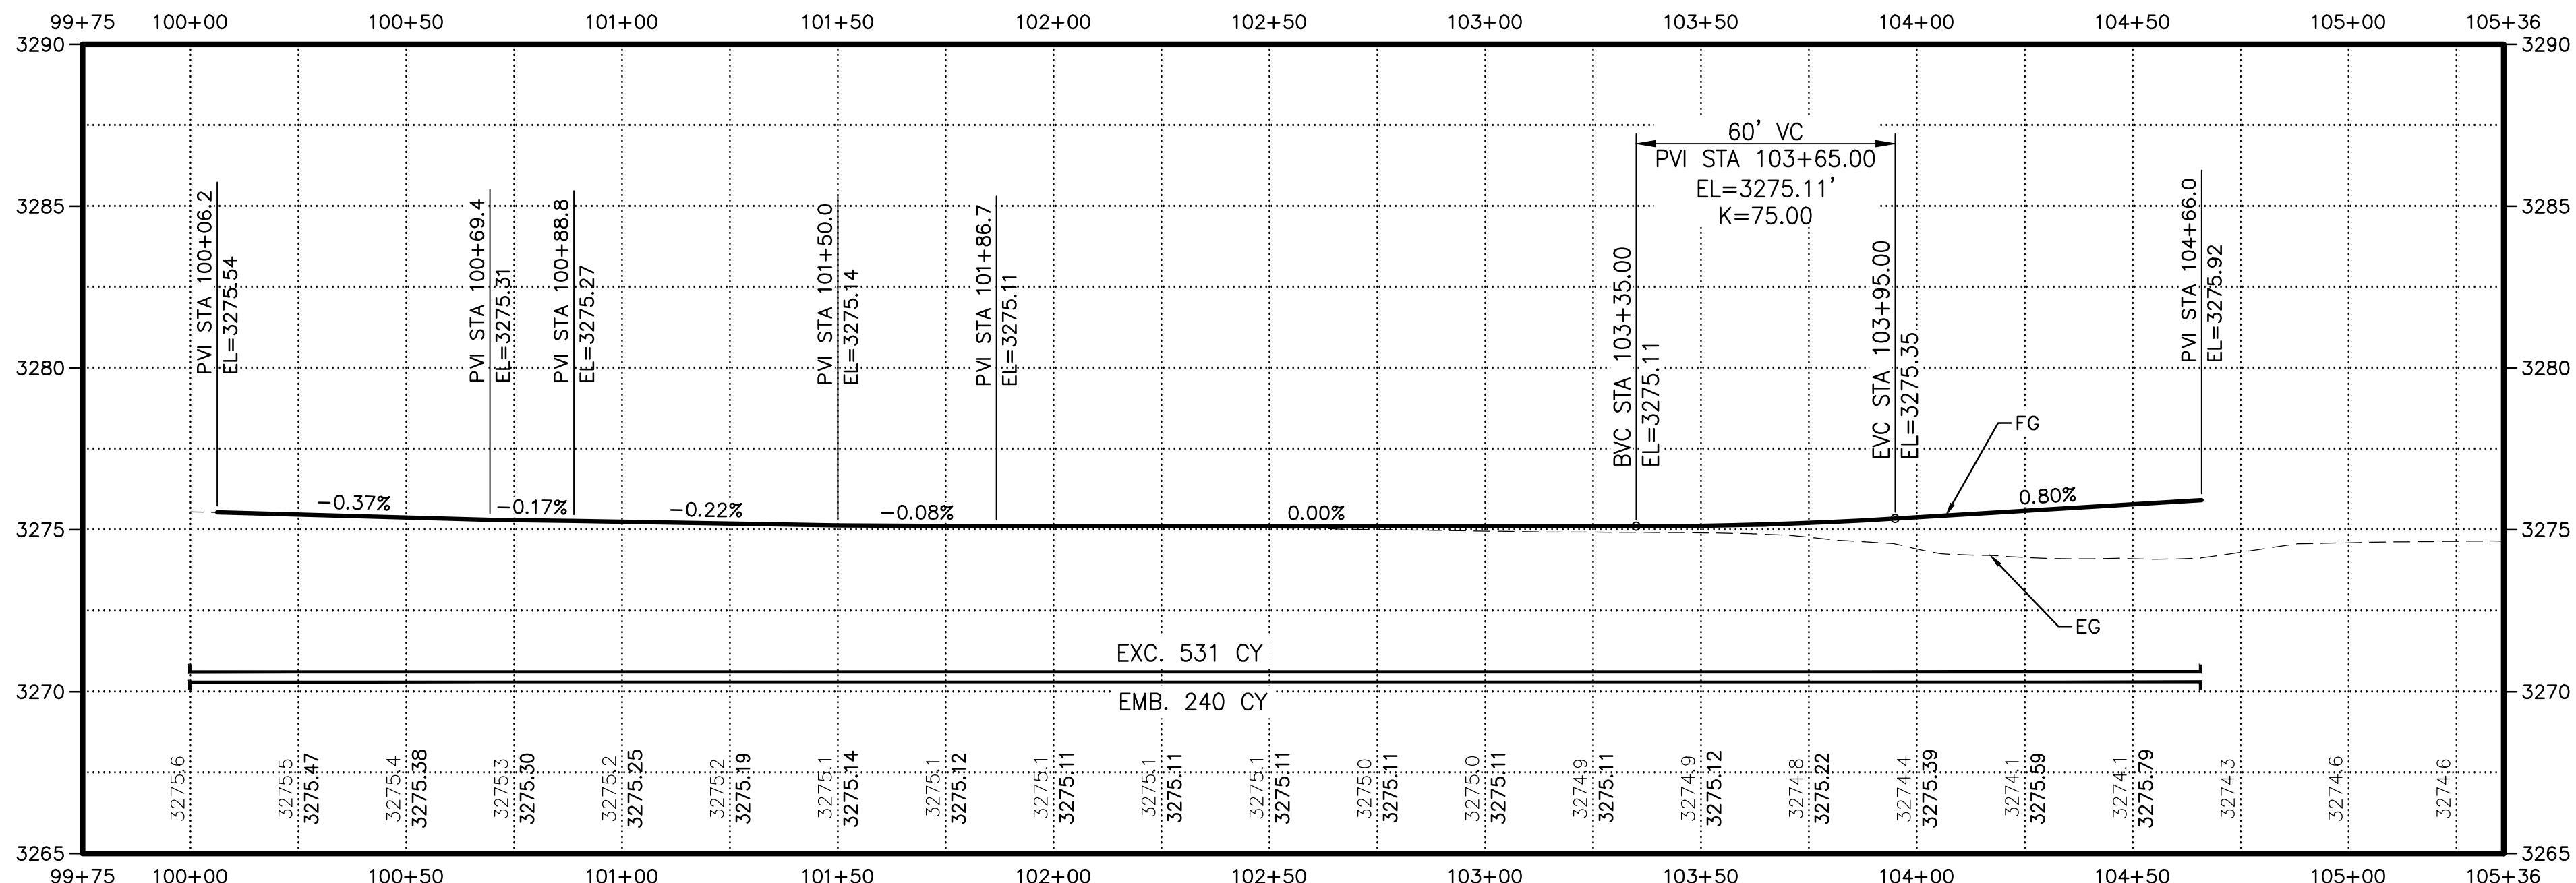

WEST LEG PROFILE
SCALE IN FEET
0 30' 60'

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | DR |
| | | | DRAWN |
| | | | DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

ONE INCH AT FULL SCALE.
IF NOT, SCALE ACCORDINGLY
FILE NAME
BE2509005-C7.0-PP00
JOB No.
297-2509-005
DATE
12/2019




PROJECT NAME
**OLD BEND-REDMOND
HIGHWAY/ TUMALO RD
INTERSECTION IMPROVEMENTS**

WEST LEG - PLAN & PROFILE


DRAWING NO.
10 OF 43
C7.0

LAYOUT: C7.1 SITE A - PLAN & PROFILE PATH: \\parametrix.com\pmx\Bend\Projects\Client\2509-005-OBRR\Design Phase\995\cs\CAD\DWG\TUMALO RD_RBA\CD'S PLOTTED BY: ricobay DATE: Thursday, June 4, 2020 6:08:25 PM


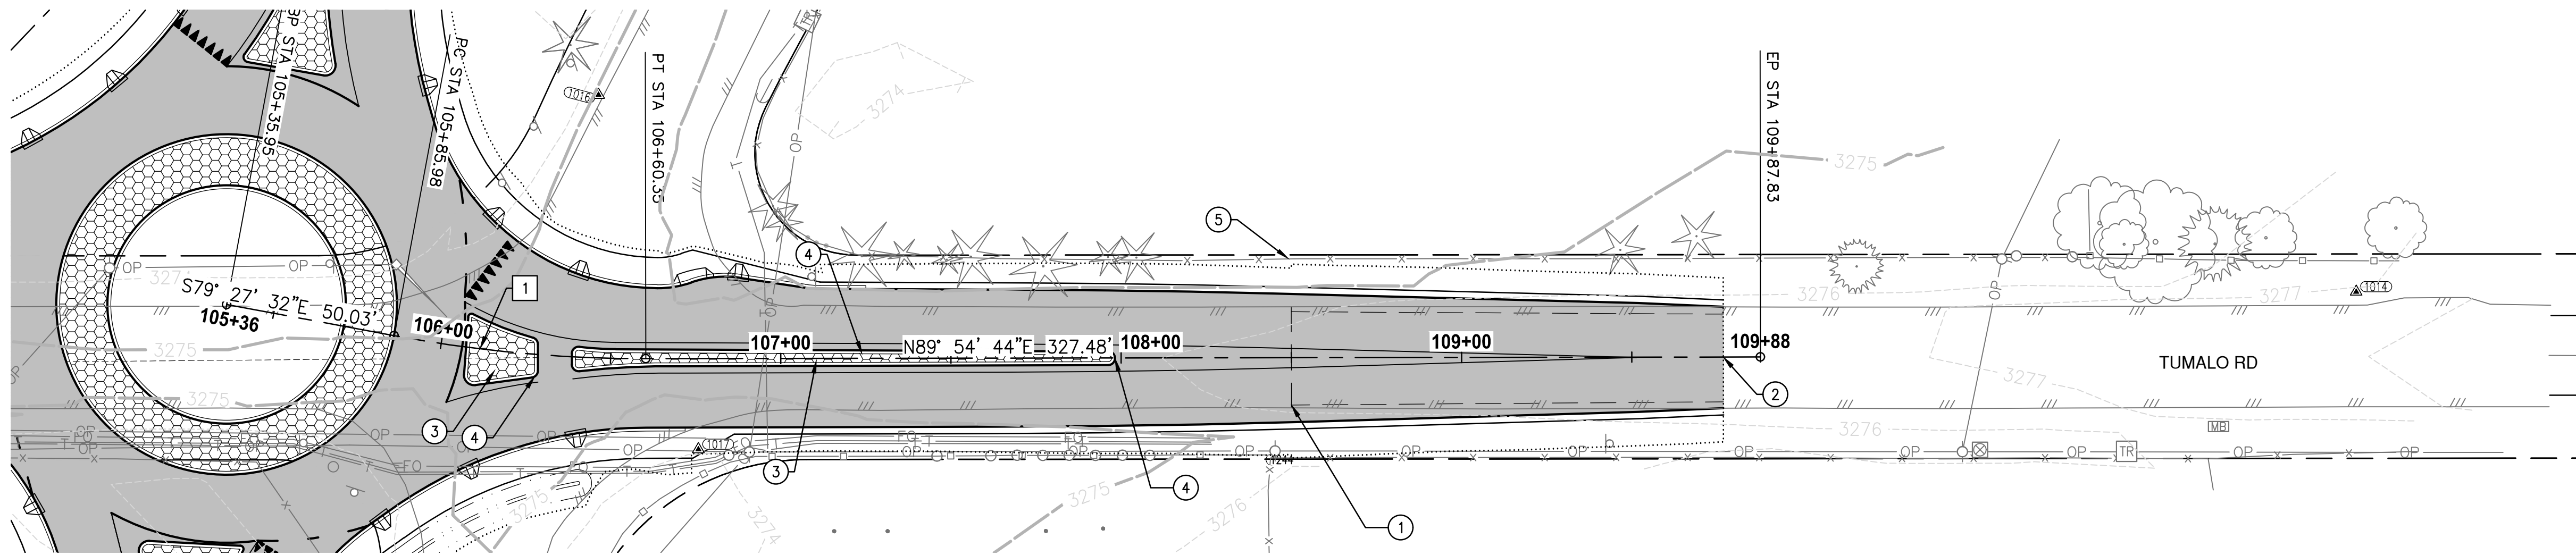


ROAD CONSTRUCTION NOTES:

- ① END FULL DEPTH CONSTRUCTION STA: 108+50
- ② END ROAD CONSTRUCTION STA: 109+76.9
- ③ CONSTRUCT STAMPED COLORED CONCRETE MEDIAN (SEE DETAIL 5/C4.0)
- ④ CONSTRUCT HIGH STRENGTH LOW PROFILE MOUNTABLE CURB SEE DETAIL 1/C4.0 AND 1/C7.8
- ⑤ REMOVE AND REBUILD EXISTING BARBED WIRE FENCE, AS NEEDED

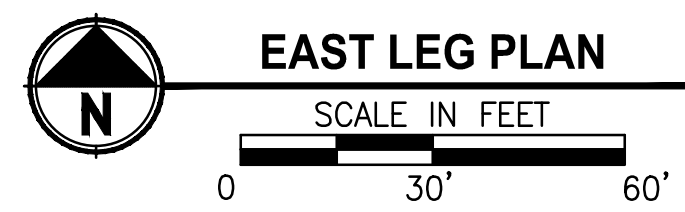


| CURVE TABLE | | | |
|-------------|--------|---------|-----------|
| CURVE ID | LENGTH | RADIUS | DELTA |
| 1 | 74.36' | 400.86' | 10°37'44" |

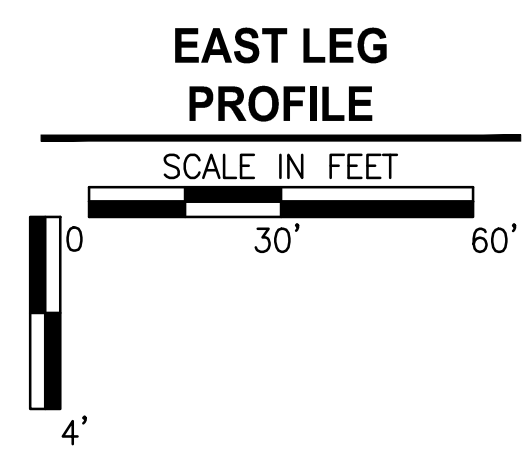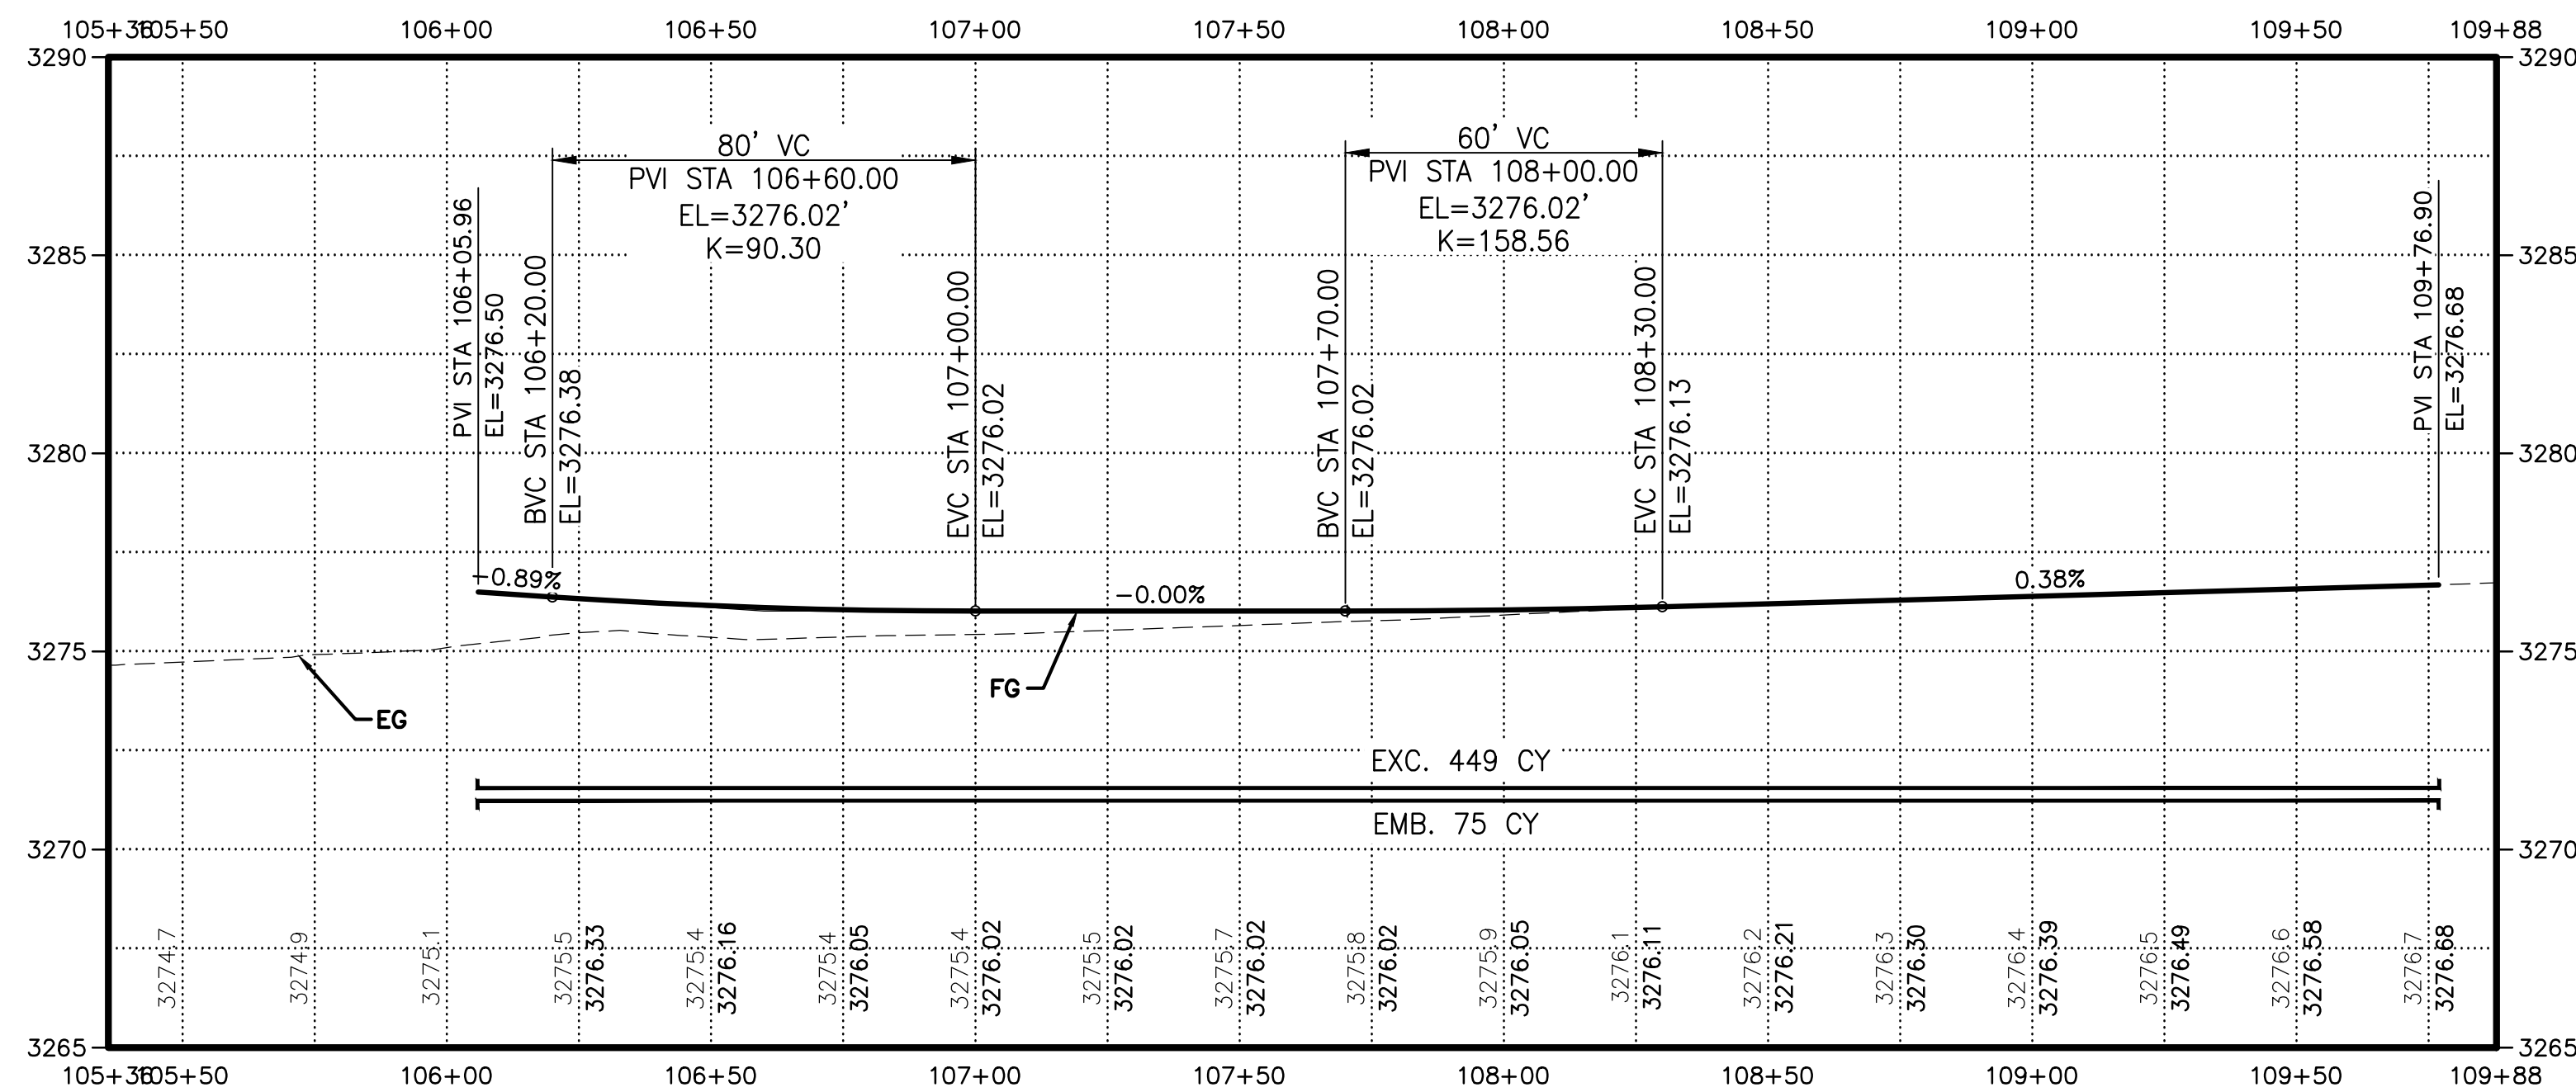

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED DR |
|-----------|------|----|-------------|
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY.
 FILE NAME: BE2509005-C7.1-PP00
 JOB No: 297-2509-005
 DATE: 05/2020


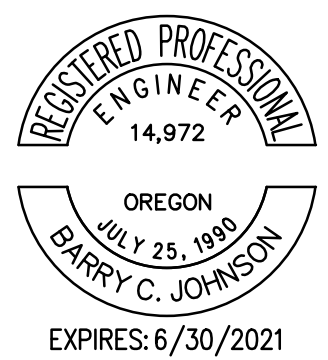


PROJECT NAME
TUMALO RD / TUMALO PL INTERSECTION IMPROVEMENTS



EAST LEG - PLAN & PROFILE

DRAWING NO.
11 OF 39
C7.1


PATH: U:\Bend\Projects\Clients\2509-Deschutes County\297-2509-005 OBRH Design Phase\99\Drawings\DWG\TUMALO RD RBAs\CD'S PLOTTED BY: ricedev DATE: Friday, April 3, 2020 9:52:40 AM
 LAYOUT: C7.2 SITE A - PLAN & PROFILE

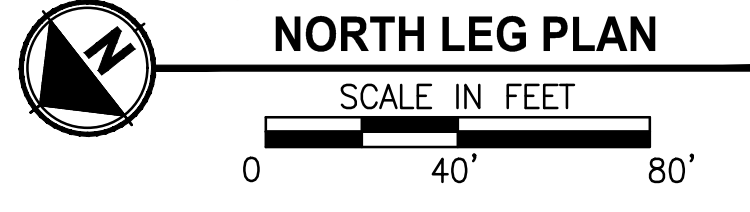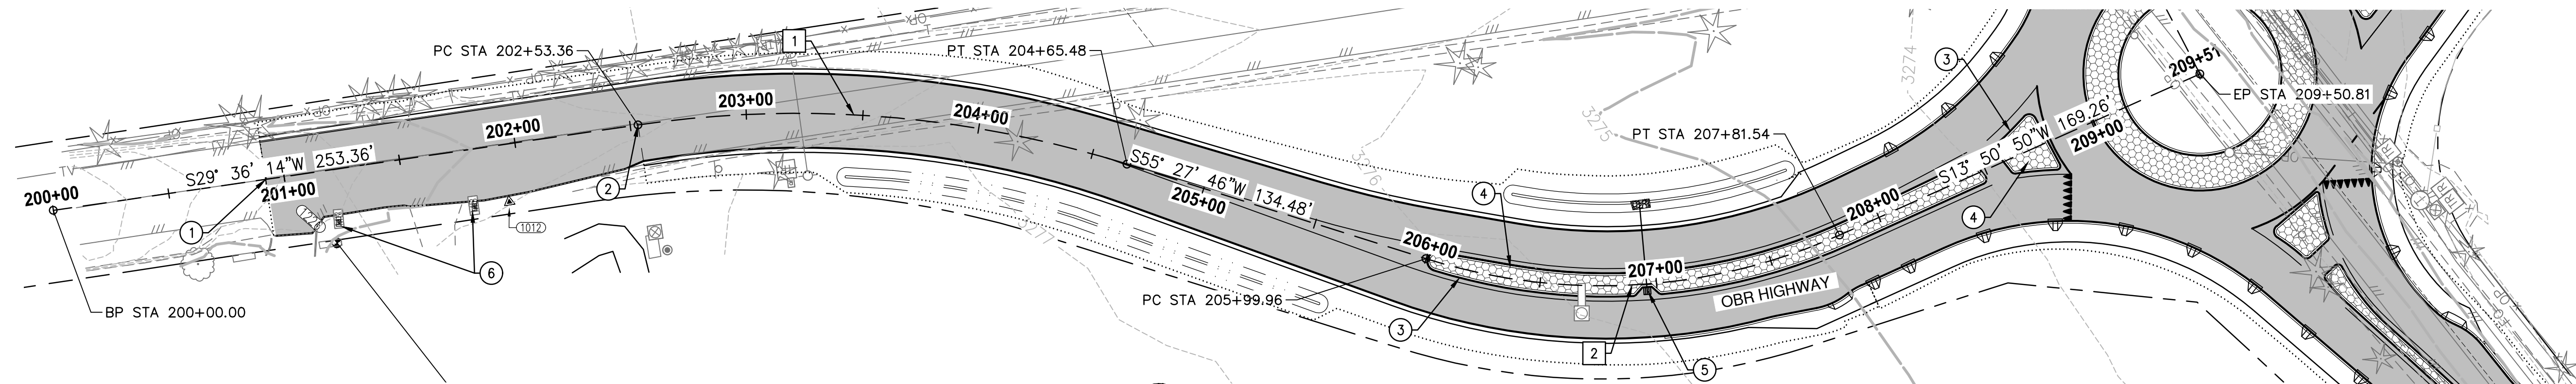

| CURVE TABLE | | | |
|-------------|---------|---------|-----------|
| CURVE ID | LENGTH | RADIUS | DELTA |
| 2 | 181.58' | 250.00' | 41°36'56" |
| 1 | 212.12' | 470.00' | 25°51'31" |

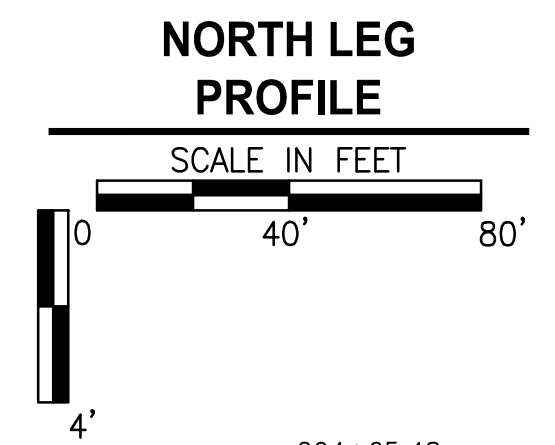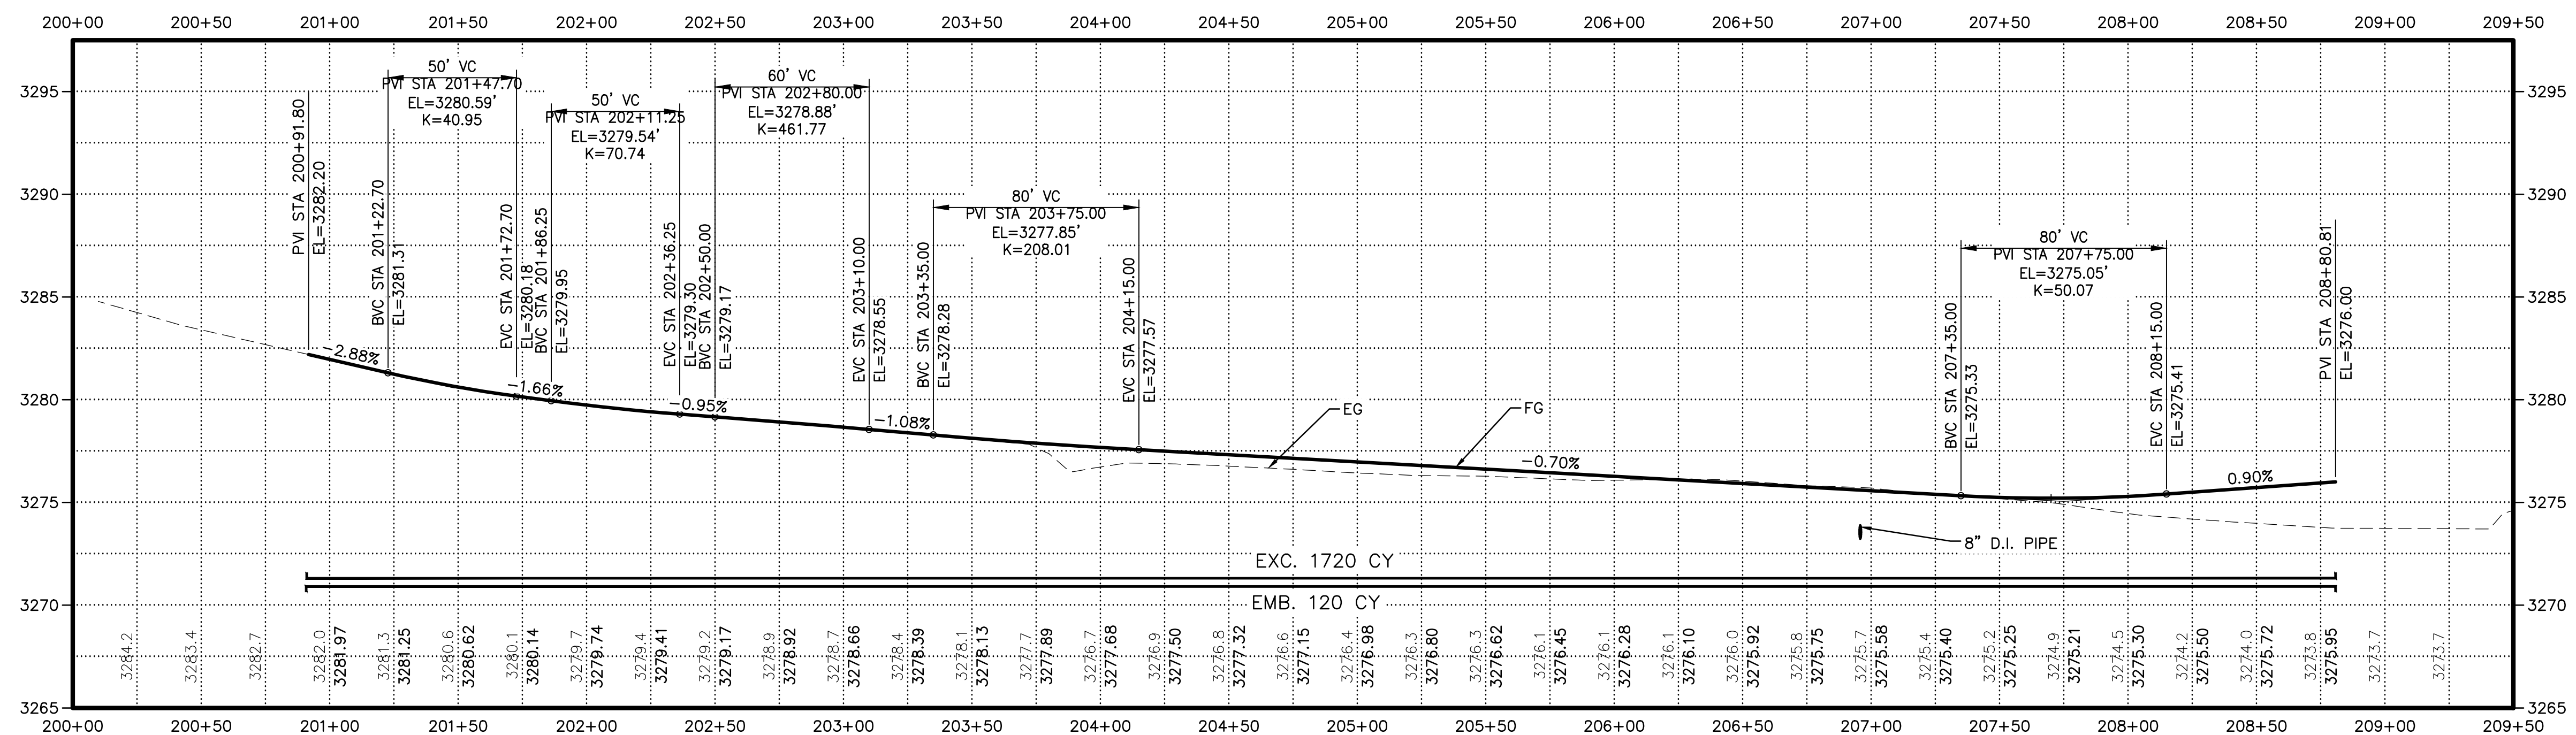

- ROAD CONSTRUCTION NOTES:**
- BEGIN 2" GRIND & INLAY STA: 200+92 RT & FULL DEPTH CONSTRUCTION PER TYPICAL SECTION 3/C2.1
 - BEGIN FULL DEPTH CONSTRUCTION STA: 202+53.36
 - CONSTRUCT HIGH STRENGTH LOW PROFILE MOUNTABLE CURB SEE DETAIL 1/C4.0 AND 1/C7.6
 - CONSTRUCT STAMPED COLORED CONCRETE MEDIAN (SEE DETAIL 5/C4.0)
 - INSTALL ODOT TYPE G-2 INLET STA: 206+95.80 2.93' RT PER ODOT STD DWG RD364 RIM=3275.627 I.E. OUT=3273.24 INSTALL 36 LF 8" DUCTILE IRON PIPE, S=.005 FT/FT MIN
 - INSTALL MAILBOX SUPPORT PER ODOT STD DWG RD100

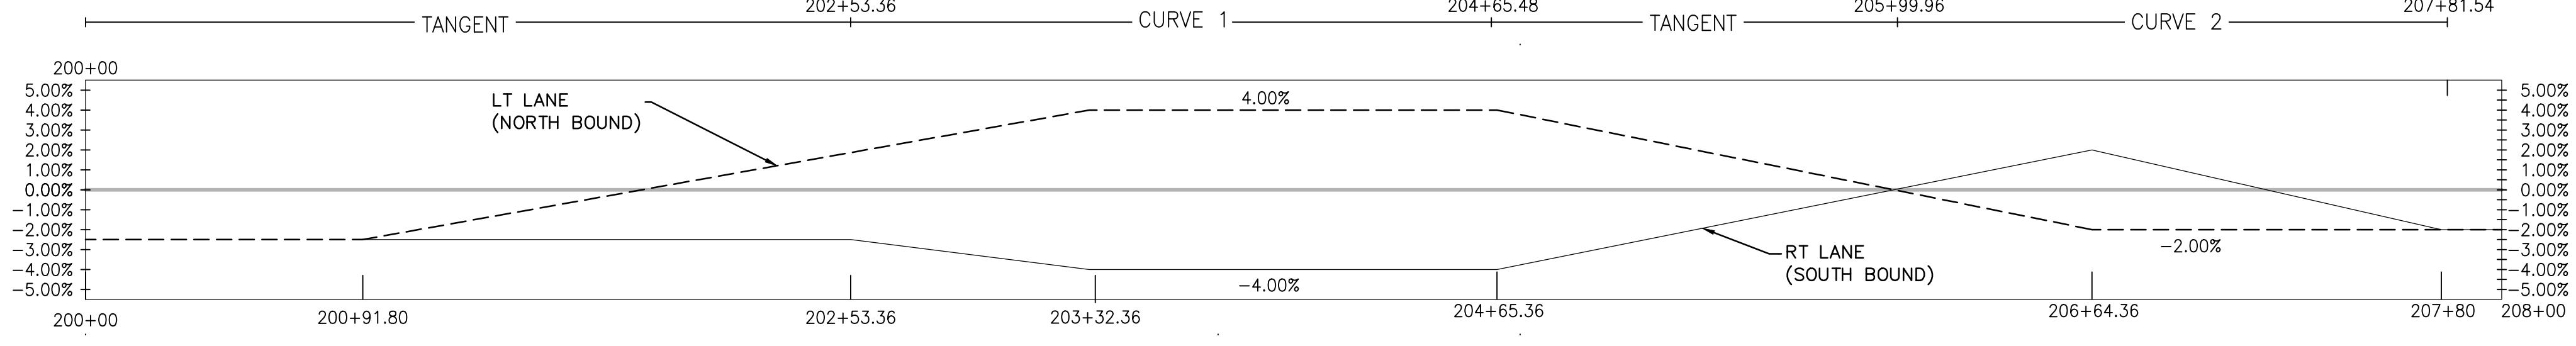

NORTH LEG SUPER ELEVATION GRAPH
1"=40'

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY
 FILE NAME: BE2509005-C7.2-PP00
 JOB No: 297-2509-005
 DATE: 12/2019




PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS

NORTH LEG - PLAN & PROFILE

DRAWING NO.
 12 OF 43
C7.2

FOR BIDDING REFERENCE ONLY




LAYOUT: C7.3 SITE A - PLAN & PROFILE
 PATH: U:\Bent\Projects\Clients\2509-Deschutes County\297-2509-005 OBRH Design Phase\99\Drawings\TUMALO RD RBAs\CDS
 PLOTTED BY: ricedov DATE: Friday, April 3, 2020 10:13:05 AM

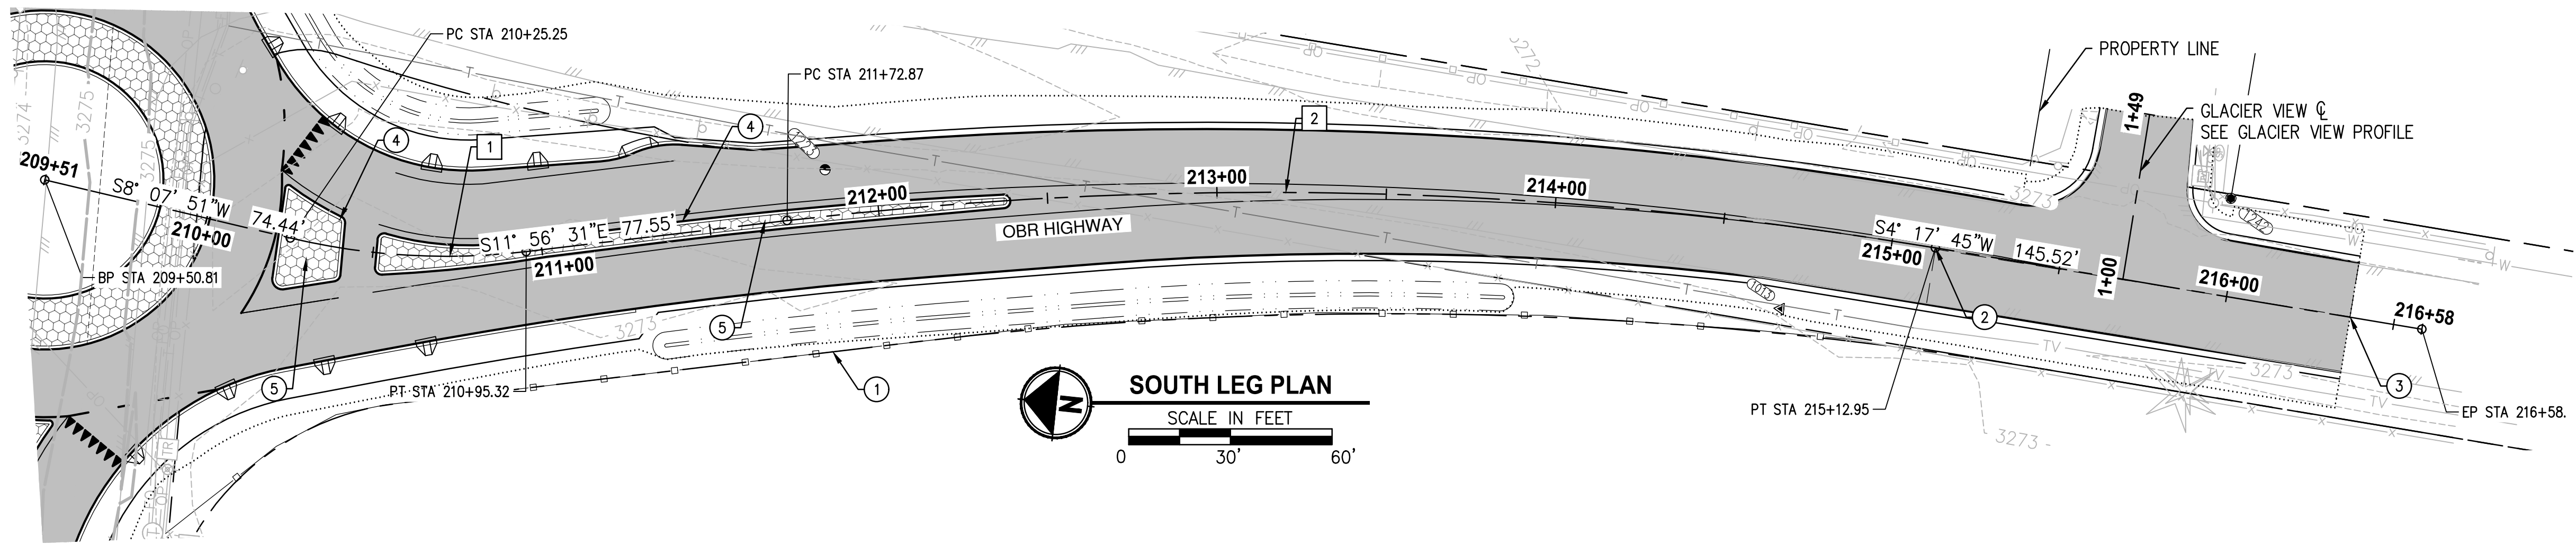

| CURVE TABLE | | | |
|-------------|---------|----------|-----------|
| CURVE ID | LENGTH | RADIUS | DELTA |
| 1 | 70.07' | 200.00' | 20°04'21" |
| 2 | 340.08' | 1200.00' | 16°14'15" |

ROAD CONSTRUCTION NOTES:

- ① INSTALL FENCE PER DETAIL 4/C4.0
- ② END FULL DEPTH CONSTRUCTION STA: 215+13
- ③ END ROAD CONSTRUCTION STA: 216+36.9
- ④ CONSTRUCT HIGH STRENGTH LOW PROFILE MOUNTABLE CURB SEE DETAIL 1/C4.0 AND 1/C7.7
- ⑤ CONSTRUCT STAMPED COLORED CONCRETE MEDIAN (SEE DETAIL 5/C4.0)

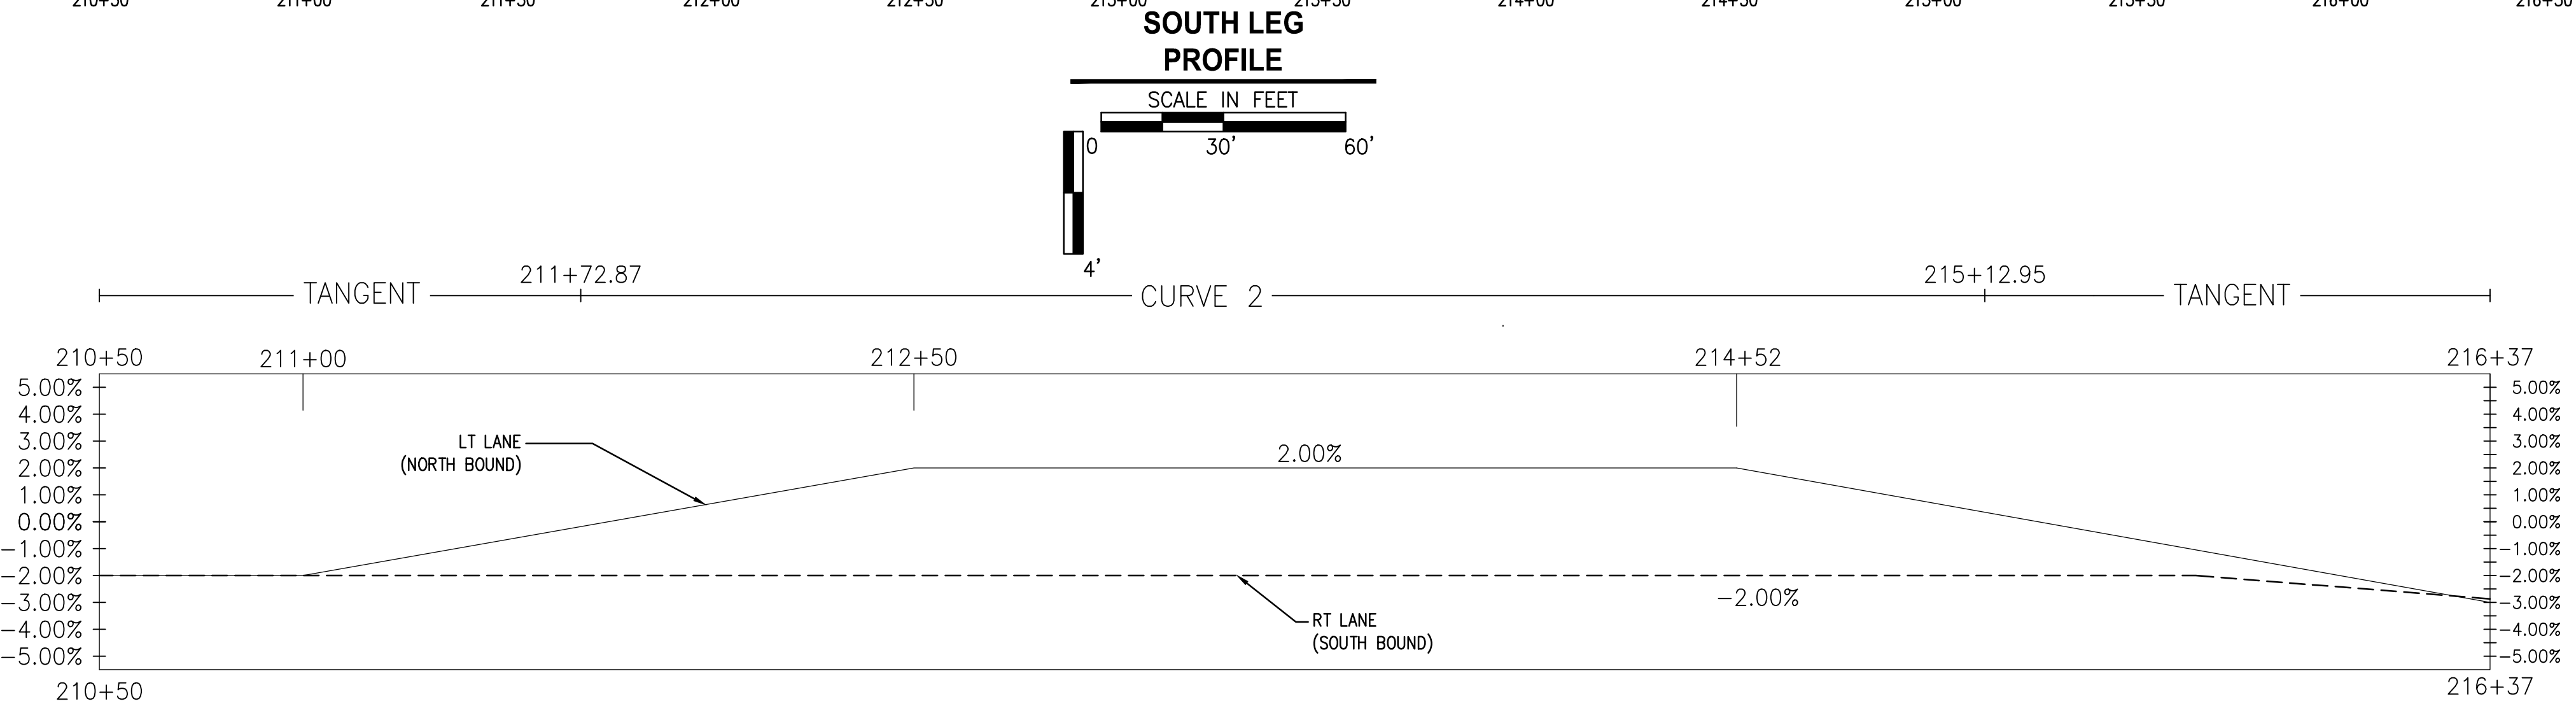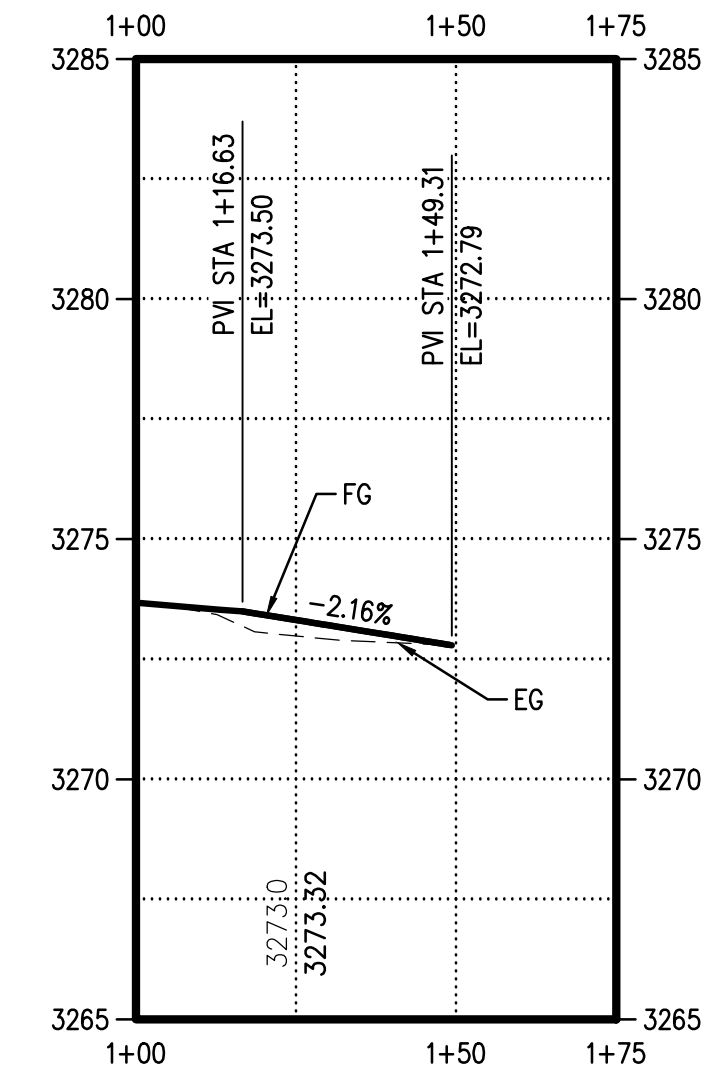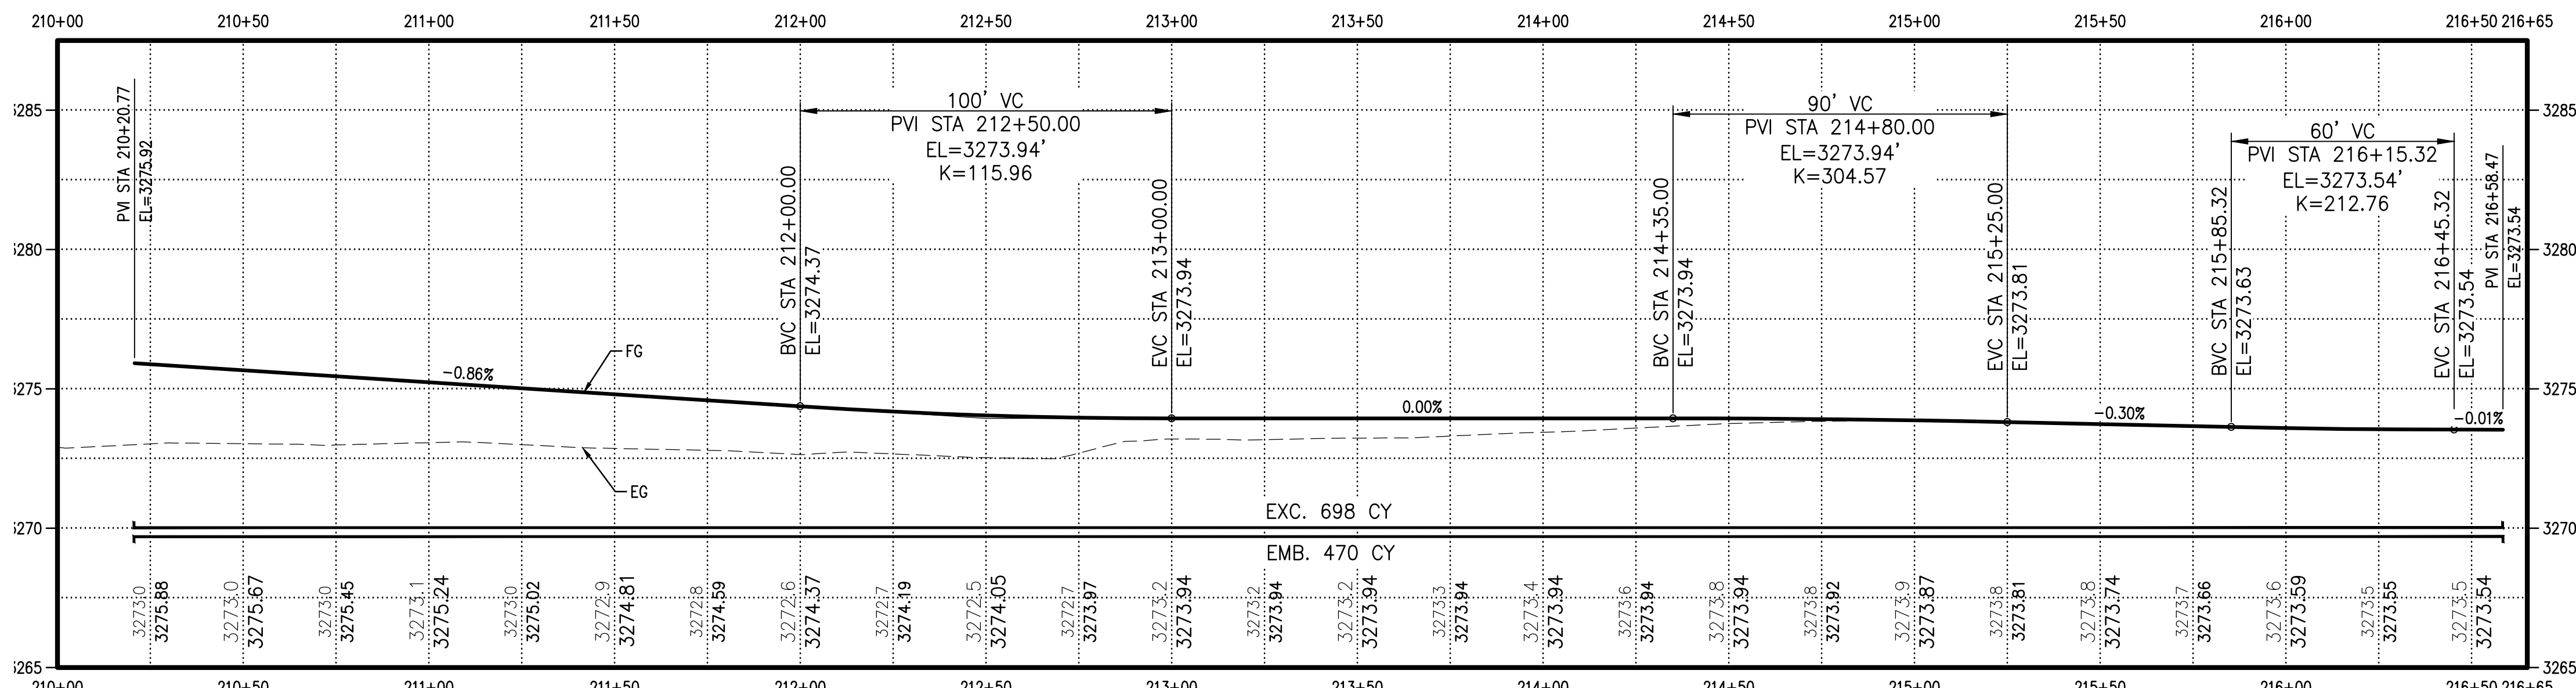


SOUTH LEG SUPER ELEVATION GRAPH
1"=30'

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | DR |
| | | | DRAWN |
| | | | DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY.
 FILE NAME: BE2509005-C7.3-PP00
 JOB No: 297-2509-005
 DATE: 12/2019

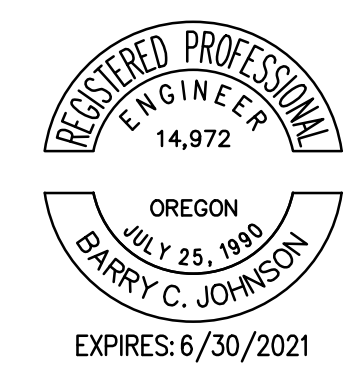


PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS

SOUTH LEG - PLAN & PROFILE
 C7.3

DRAWING NO.
 13 OF 43
C7.3



LAYOUT: C7.4 SITE A - PLAN & PROFILE
 PATH: U:\Bend\Projects\Clients\2509-deschutes county\297-2509-005 obrh design phase\995\cadd\dwg\tumalo rd rcta\CD5
 PLOTTED BY: ricodav DATE: Friday, April 3, 2020 9:28:22 AM

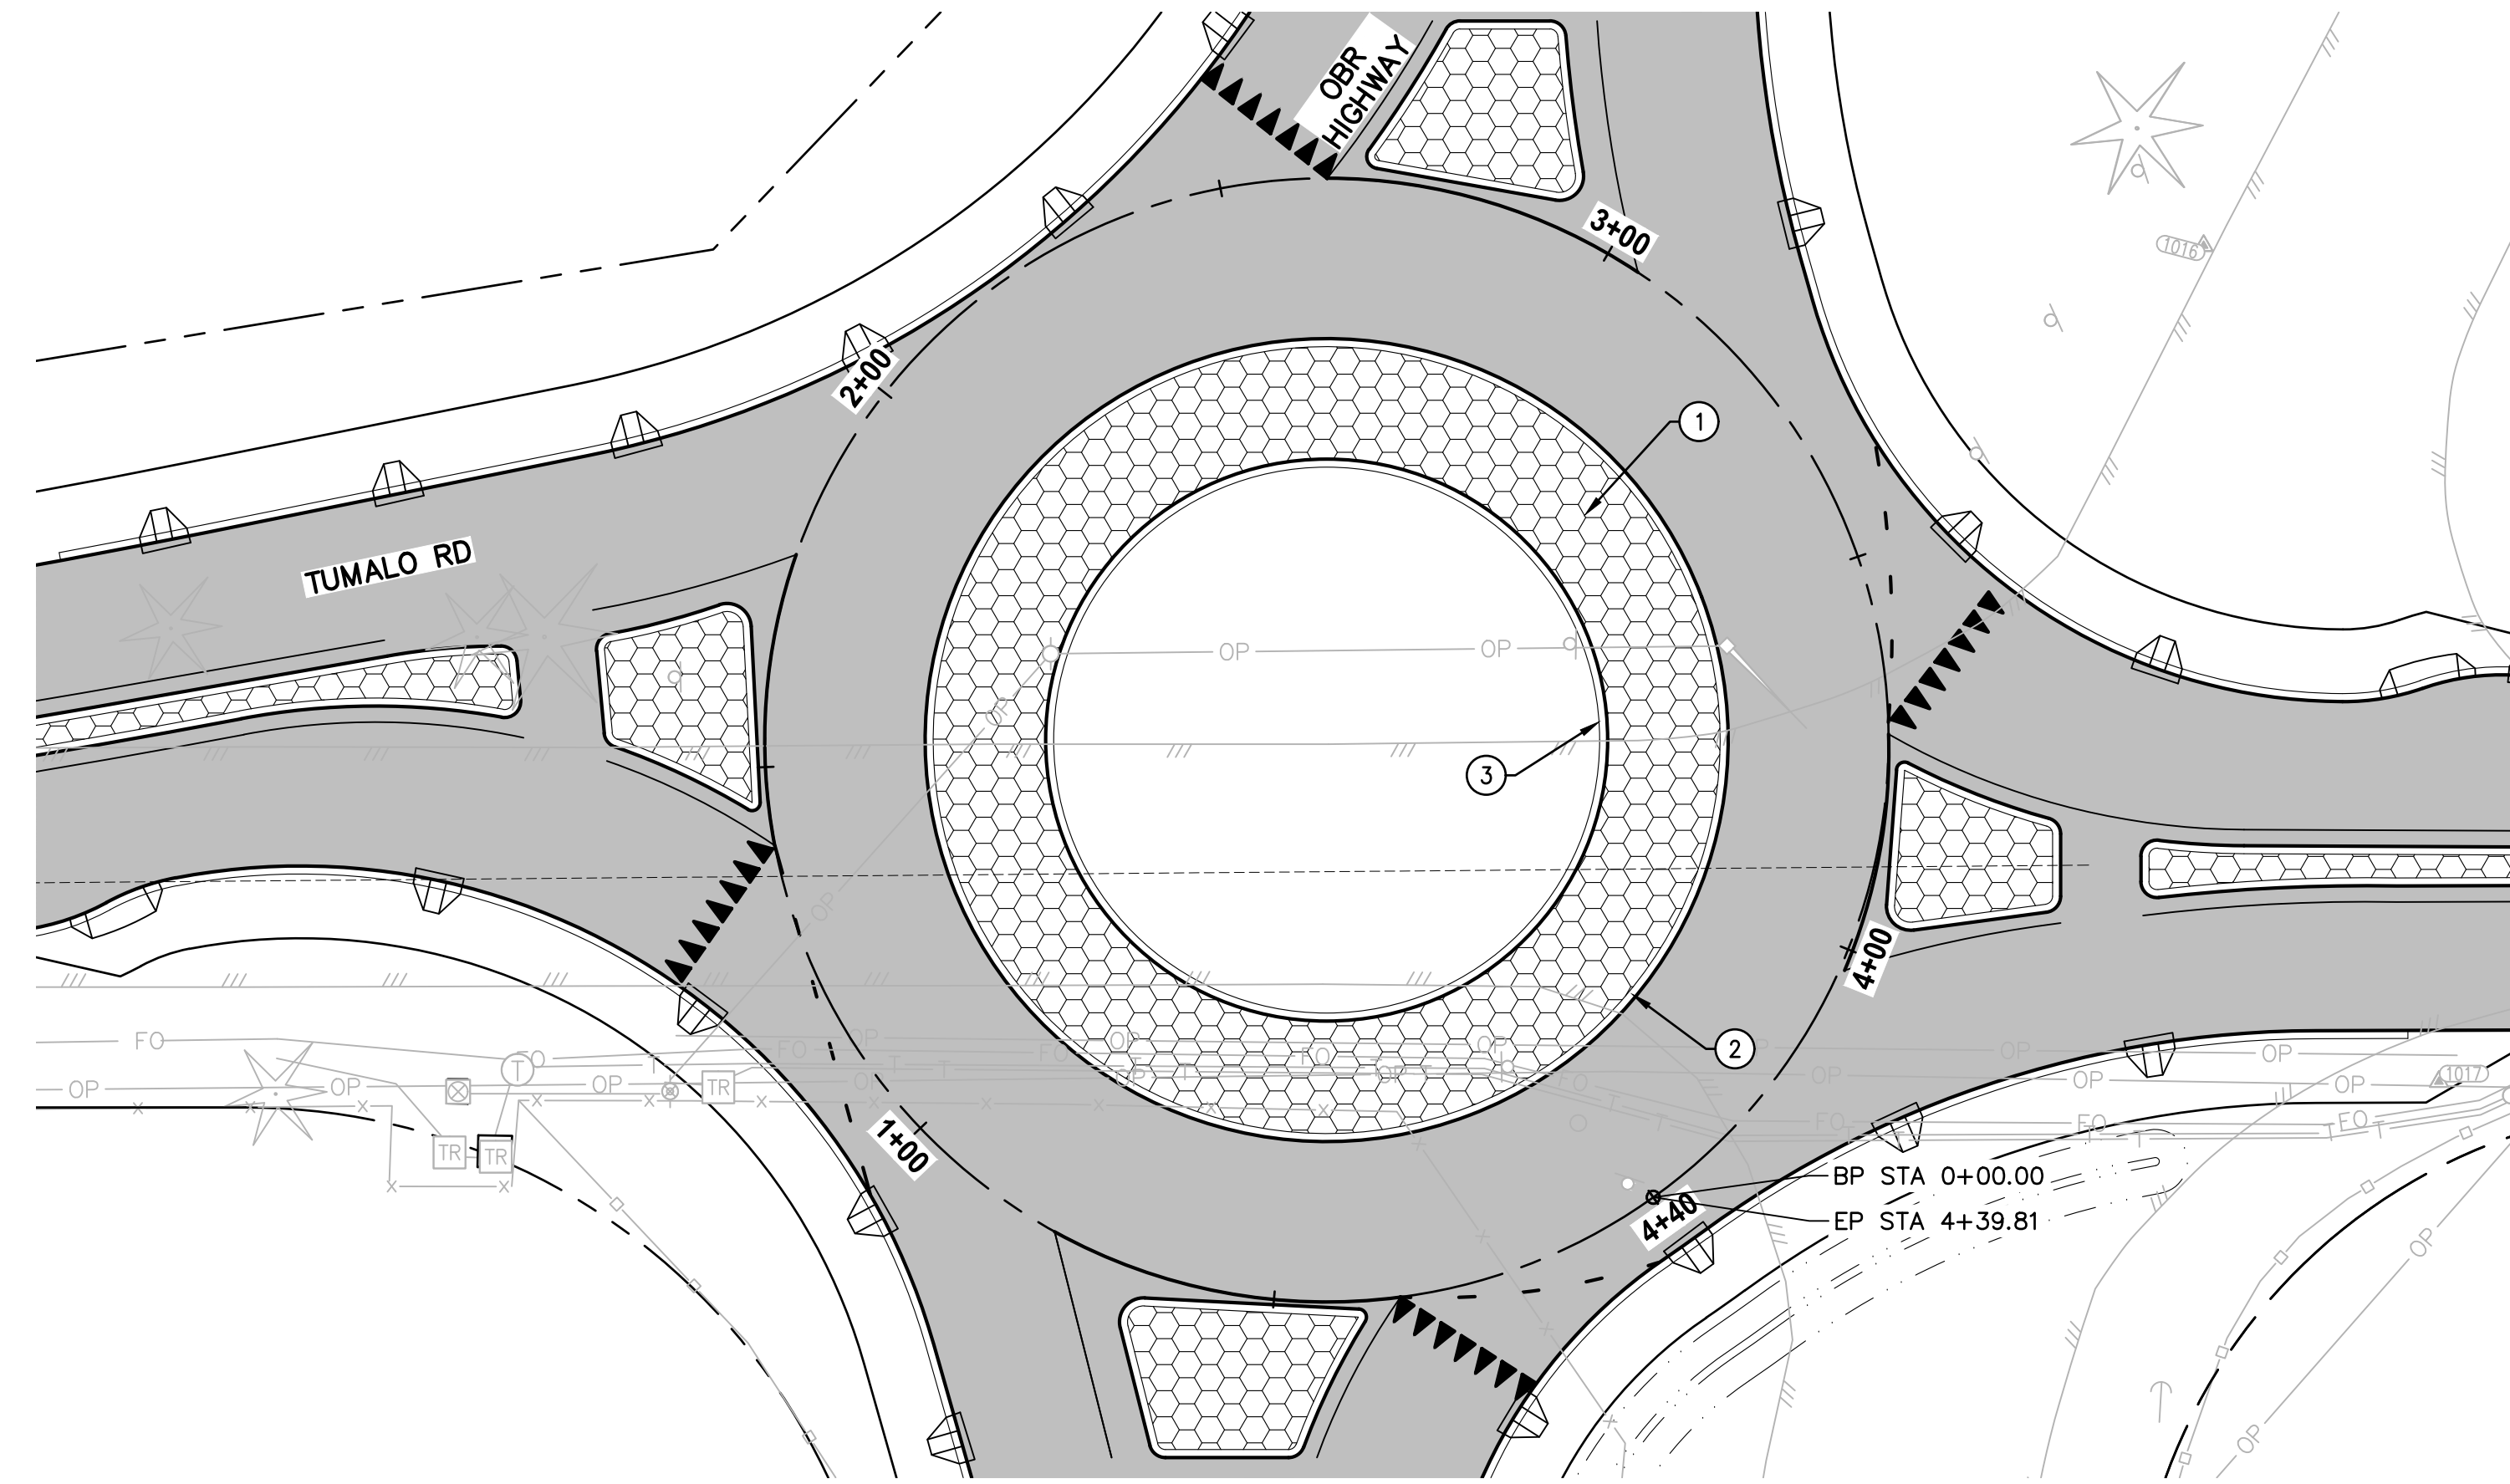

ROAD CONSTRUCTION NOTES:

- ① CONSTRUCT STAMPED COLORED CONCRETE TRUCK APRON PER DETAIL 5/C.40
- ② CONSTRUCT HIGH STRENGTH TRUCK APRON LOW PROFILE MOUNTABLE CURB PER DETAIL 2/C4.0
- ③ CONSTRUCT HIGH STRENGTH WIDE MODIFIED CURB PER DETAIL 6/C4.0

OUTER CIRCLE PLAN

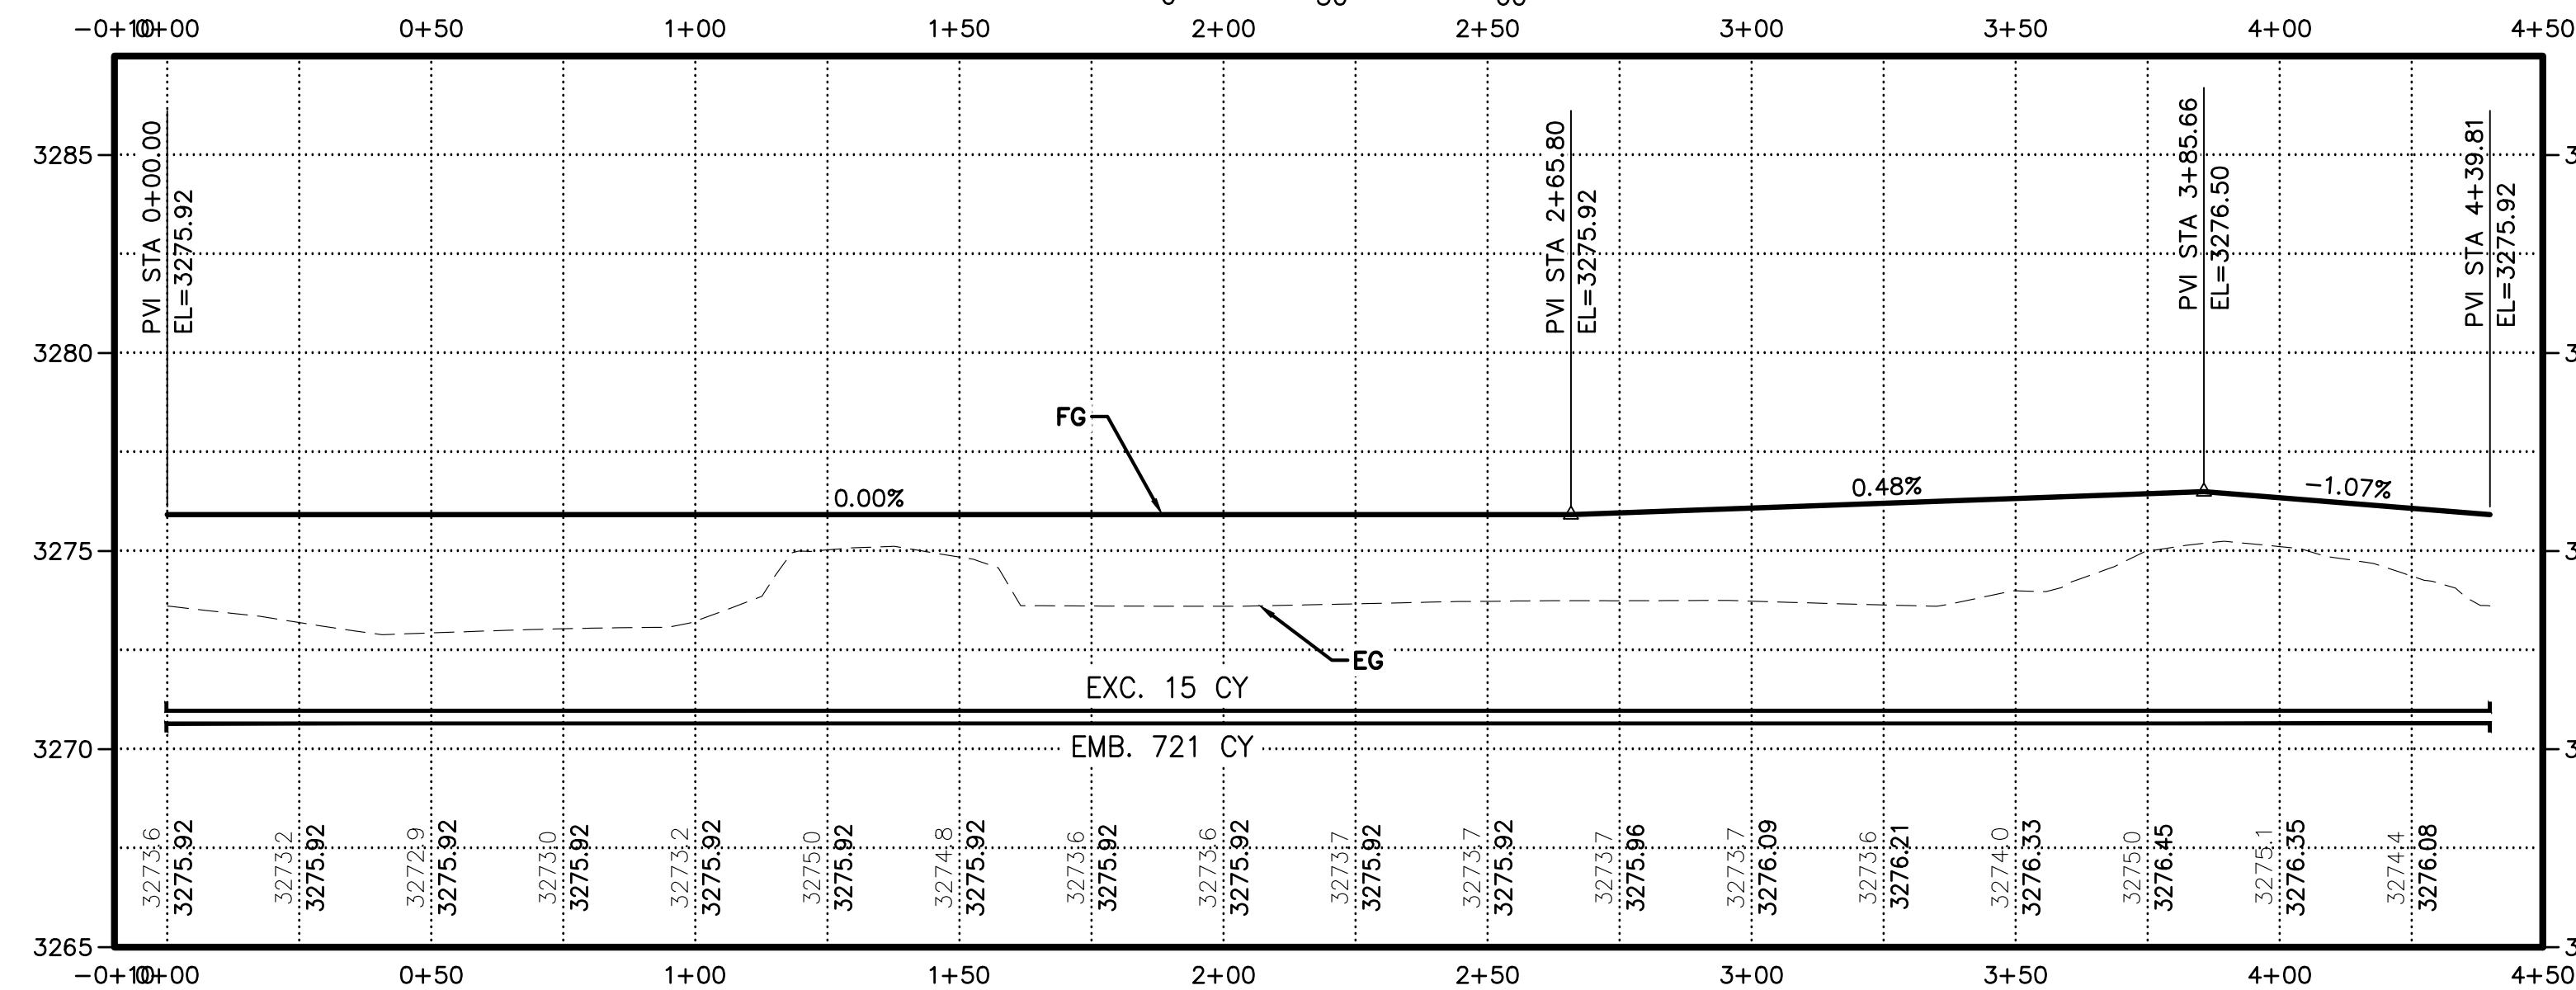

OUTER CIRCLE PROFILE



FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY.
 FILE NAME: BE2509005-C7.4-PP00
 JOB No: 297-2509-005
 DATE: 12/2019






PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS

OUTER CIRCLE - PLAN & PROFILE

DRAWING NO.
 14 OF 43
C7.4

LAYOUT: C7.5 SITE A - PLAN & PROFILE
 PATH: U:\Bent\Projects\Clients\2509-Deschutes County\297-2509-005 OBRH Design Phase\99\SS\CD\DWG\TUMALO RD RBAs\CD'S
 PLOTTED BY: ricedorv DATE: Friday, April 3, 2020 9:57:53 AM

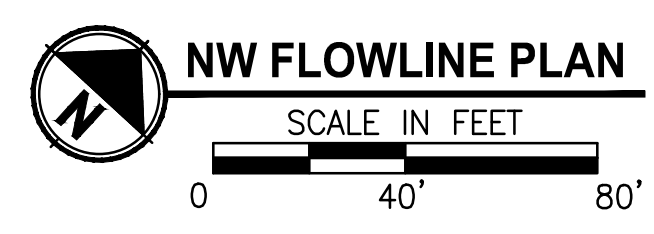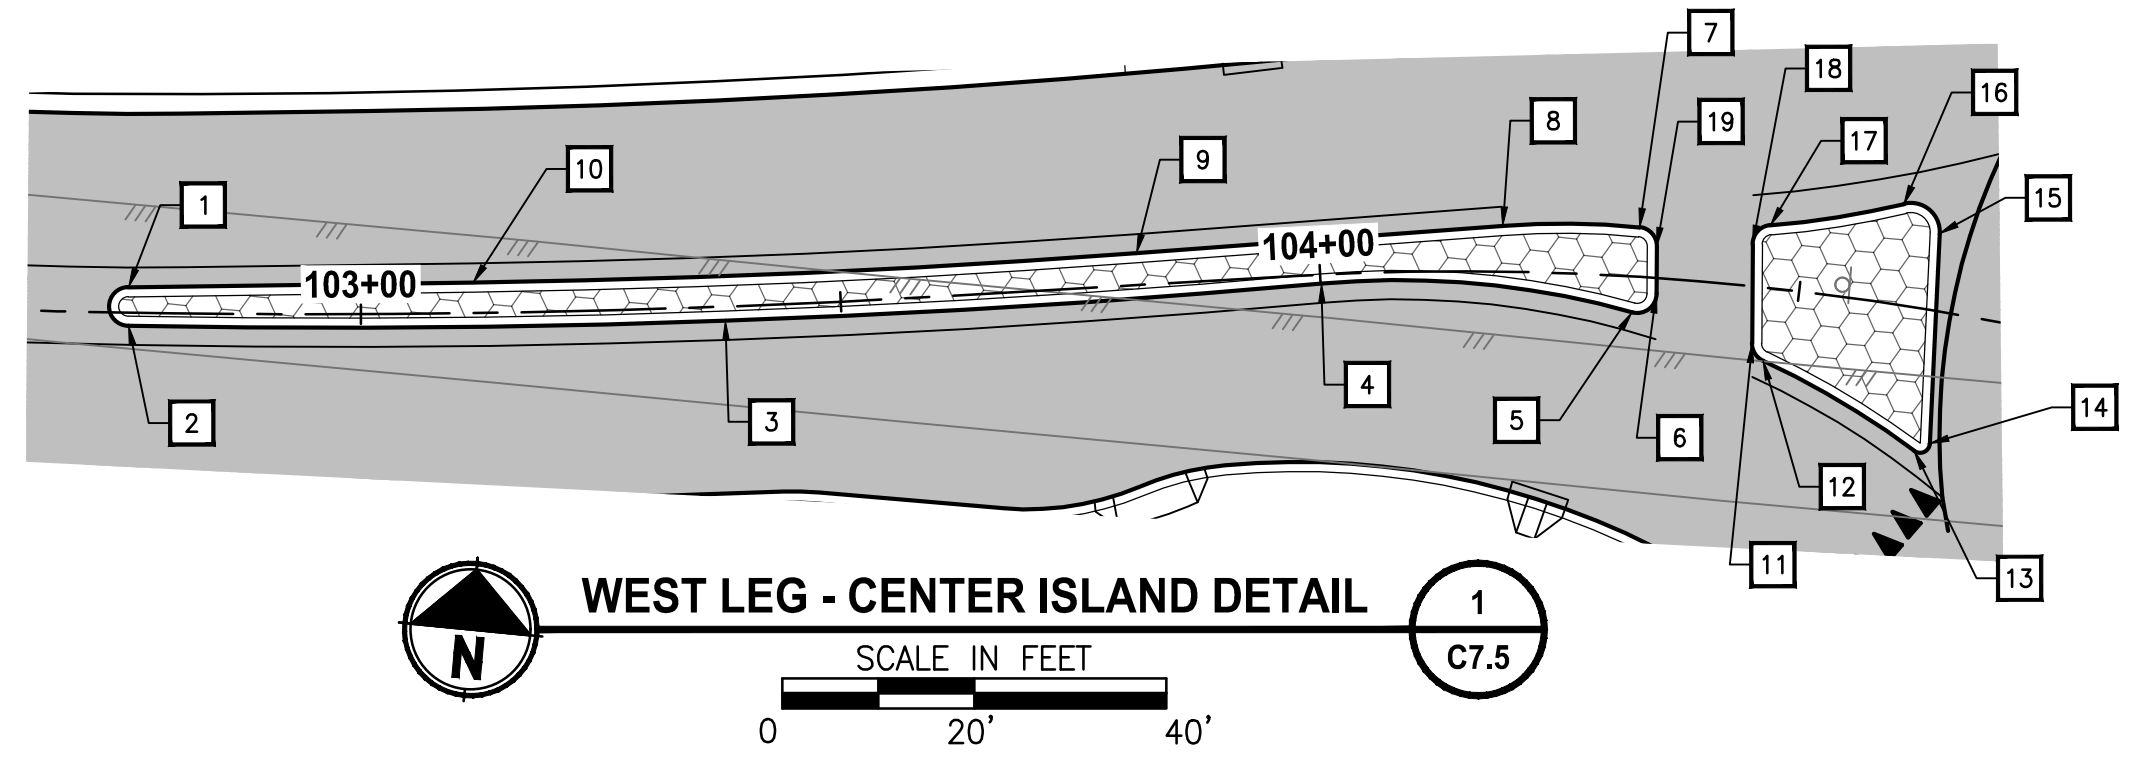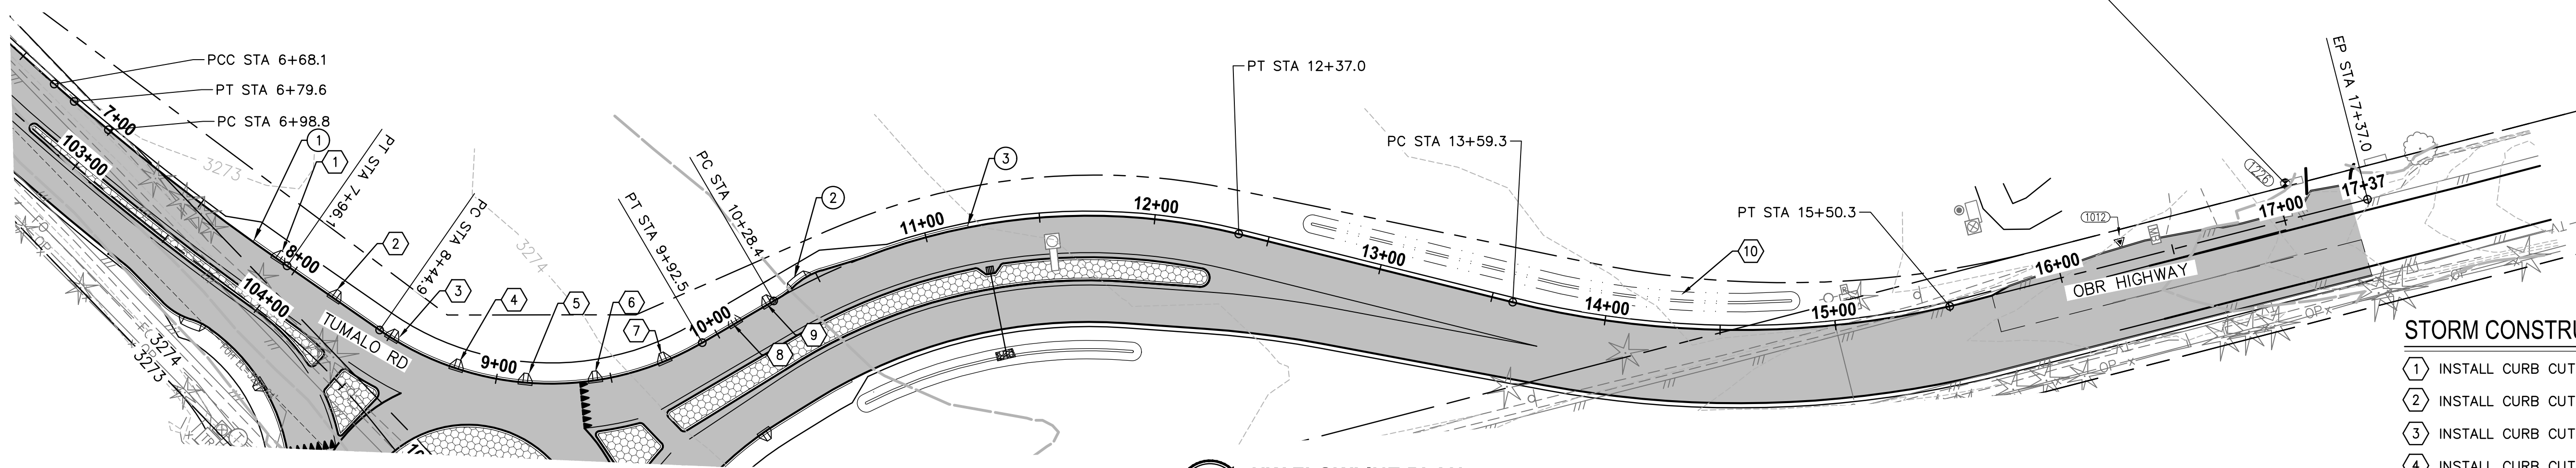



CONSTRUCTION NOTES:

- ① CONSTRUCT HIGH STRENGTH CONCRETE CURB STA: 7+77.9 (SEE DETAIL 1/C4.0)
- ② CONSTRUCT BIKE EXIT RAMP STA: 10+41.5 (SEE DETAIL 8/C4.0)
- ③ END HIGH STRENGTH CONCRETE CURB STA: 11+18.9 (SEE DETAIL 1/C4.0)

STORM CONSTRUCTION NOTES:


- ① INSTALL CURB CUT PER DETAIL 9/C4.0, STA: 7+91.1
- ② INSTALL CURB CUT PER DETAIL 9/C4.0, STA: 8+20.8
- ③ INSTALL CURB CUT PER DETAIL 9/C4.0, STA: 8+51.1
- ④ INSTALL CURB CUT PER DETAIL 9/C4.0, STA: 8+82
- ⑤ INSTALL CURB CUT PER DETAIL 9/C4.0, STA: 9+12.6
- ⑥ INSTALL CURB CUT PER DETAIL 9/C4.0, STA: 9+43.1
- ⑦ INSTALL CURB CUT PER DETAIL 9/C4.0, STA: 9+74.3
- ⑧ INSTALL CURB CUT PER DETAIL 9/C4.0, STA: 10+09.14
- ⑨ INSTALL CURB CUT PER DETAIL 9/C4.0, STA: 10+25.90 (LOW POINT)
- ⑩ CONSTRUCT WATER QUALITY SWALE PER DETAIL 7/C4.0

| CURB RETURN TABLE | | | | |
|-------------------|-----------------------|-----------|------|--------|
| POINT | FL @ FOC LOCATION | ELEVATION | DESC | RADIUS |
| 1 | STA 102+75.8/2.65 LT | 3275.06' | PC | 2' |
| 2 | STA 102+75.8/1.35 RT | 3275.08' | PCC | 1148' |
| 3 | STA 103+37.9/1.47 RT | 3275.08' | MID | 1148' |
| 4 | STA 104+00.1/0.94RT | 3275.37' | PRC | 90' |
| 5 | STA 104+32.8/3.73 RT | 3275.58' | PT | 2' |
| 6 | STA 104+35.2/1.65 RT | 3275.64' | PC | |
| 7 | STA 104+33/5.14 LT | 3275.58' | PCC | |
| 8 | STA 104+19/4.74 LT | 3275.46' | PT | |
| 9 | STA 103+8.11/3.3 LT | 3275.18' | PC | 1145' |
| 10 | STA 103+11.8/3.2 LT | 3275.05' | PT | |
| 11 | STA 104+45.7/5.9 RT | 3275.66' | PC | 2' |
| 12 | STA 104+47.1/7.62 RT | 3275.65' | PRC | 90' |
| 13 | STA 104+64.6/14.75 RT | 3275.87' | PRC | 1' |
| 14 | STA 104+66.1/13.74 RT | 3275.90' | PT | |
| 15 | STA 104+63.5/8.03 LT | 3275.89' | PC | 3' |
| 16 | STA 104+59.5/10.46 LT | 3275.82' | PRC | 91.5' |
| 17 | STA 104+46.3/6.50 LT | 3275.69' | PRC | 2' |
| 18 | STA 104+44.7/4.33 LT | 3275.70' | PT | |
| 19 | STA 104+34.9/3.23 LT | 3275.62' | PT | 2' |

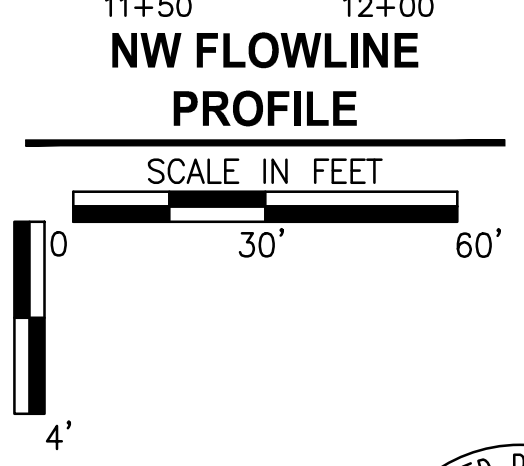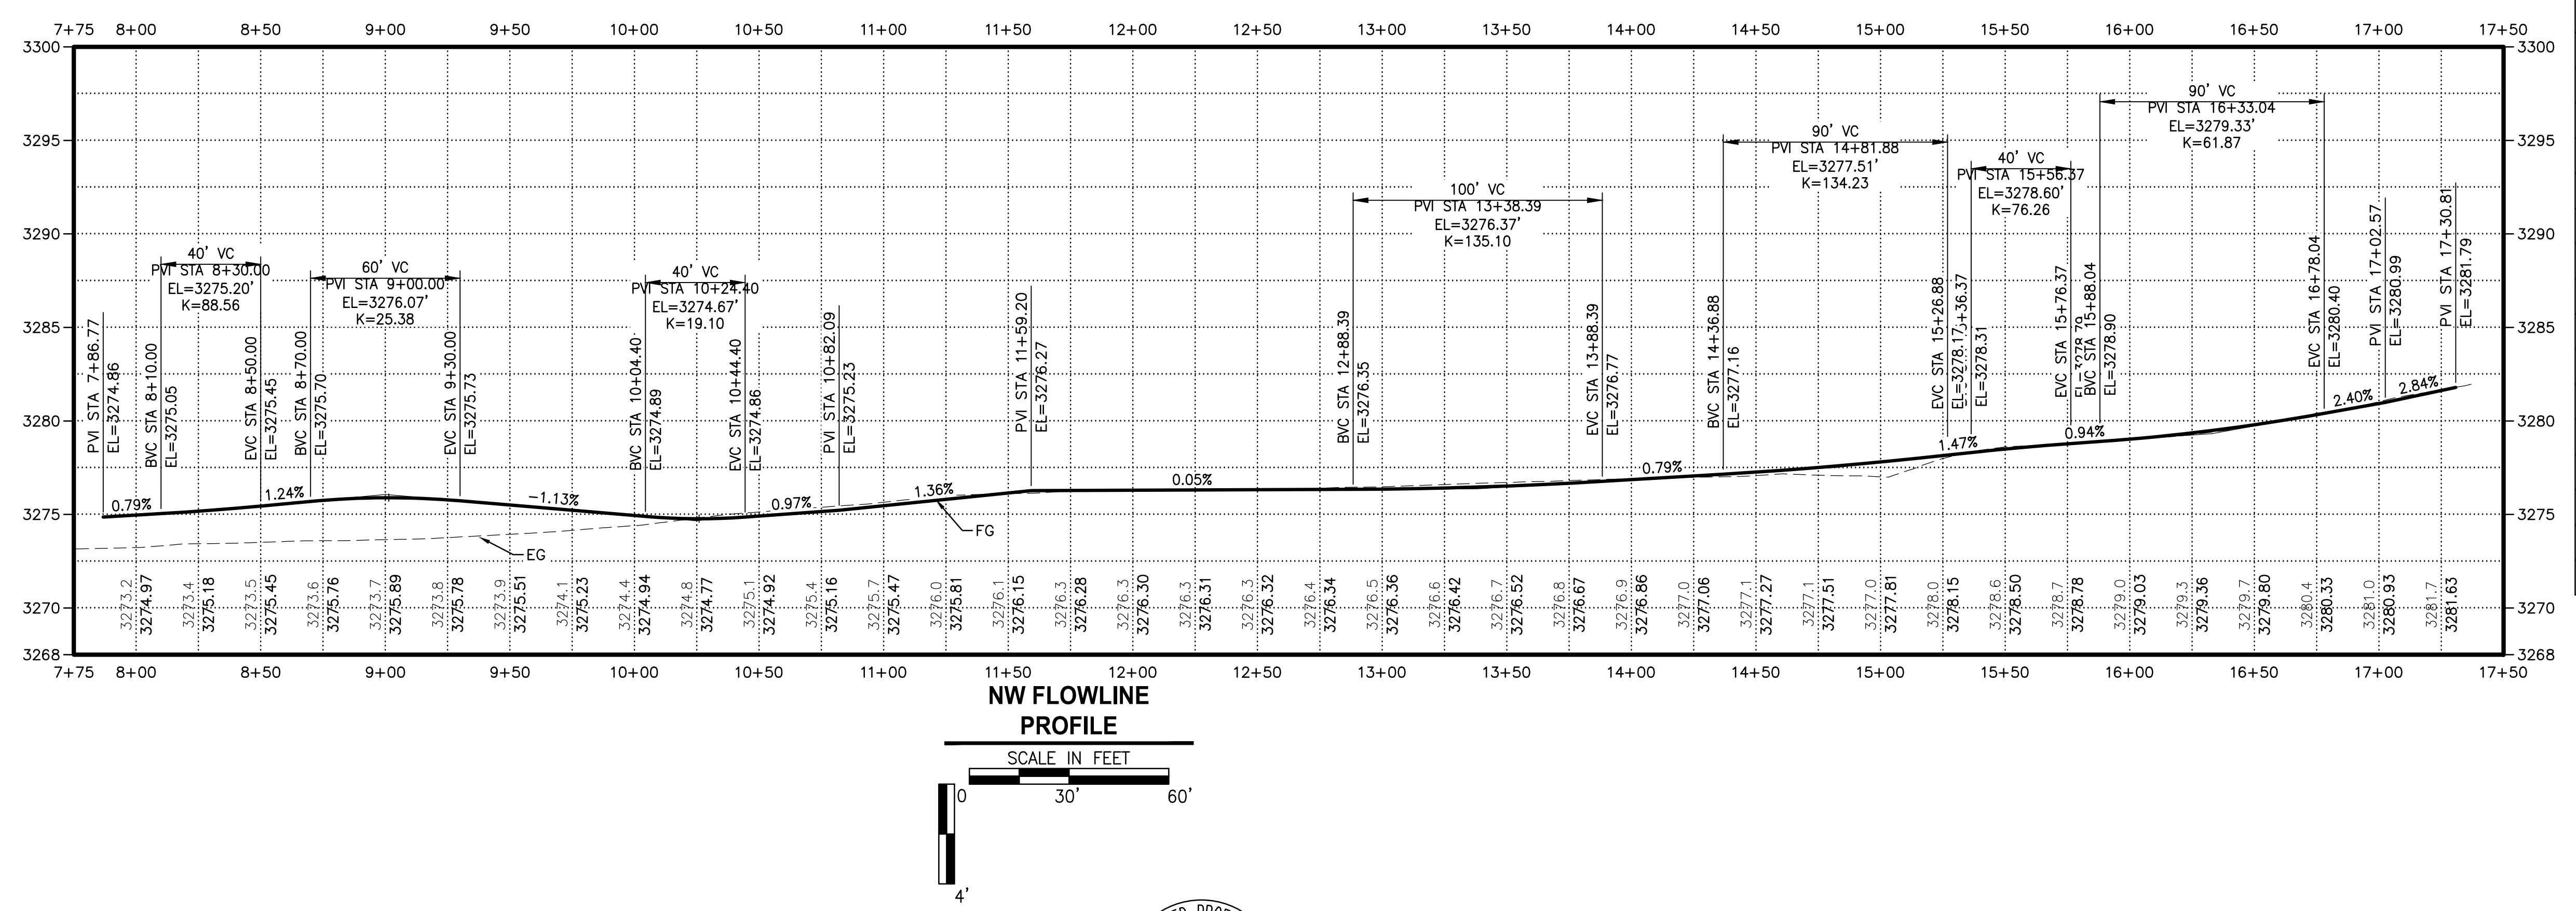

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | DR |
| | | | DRAWN |
| | | | DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

ONE INCH AT FULL SCALE, IF NOT, SCALE ACCORDINGLY
 FILE NAME: BE2509005-C7.5-PP00
 JOB No: 297-2509-005
 DATE: 12/2019

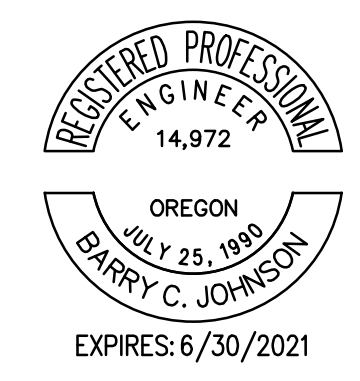

PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS

NW FLOWLINE - PLAN & PROFILE

DRAWING NO.
 15 OF 43
C7.5

FOR BIDDING REFERENCE ONLY



PATH: U:\Bent\Projects\Clients\2509-Deschutes County\297-2509-005 08BH Design Phase\99\SS\CD\DWG\TUMALO RD RBAs\CD'S PLOTTED BY: ricedov DATE: Friday, April 3, 2020 10:08:35 AM
 LAYOUT: C7.7 SITE A - PLAN & PROFILE

CONSTRUCTION NOTES:


- ① CONSTRUCT HIGH STRENGTH CONCRETE CURB (SEE DETAIL 1/C4.0) STA: 43+37.4
- ② CONSTRUCT BIKE EXIT RAMP STA: 43+83.3 (SEE DETAIL 8/C4.0)
- ③ END HIGH STRENGTH CONCRETE CURB STA: 46+19.0 (SEE DETAIL 1/C4.0)

STORM CONSTRUCTION NOTES:

- ① INSTALL CURB CUT PER DETAIL 9/C4.0 STA: 44+25
- ② INSTALL CURB CUT PER DETAIL 9/C4.0 STA: 44+61.7
- ③ INSTALL CURB CUT PER DETAIL 9/C4.0 STA: 44+95.8
- ④ INSTALL CURB CUT PER DETAIL 9/C4.0 STA: 45+26.1
- ⑤ INSTALL CURB CUT PER DETAIL 9/C4.0 STA: 45+46.5
- ⑥ CONSTRUCT WATER QUALITY SWALE PER DETAIL 7/C4.0

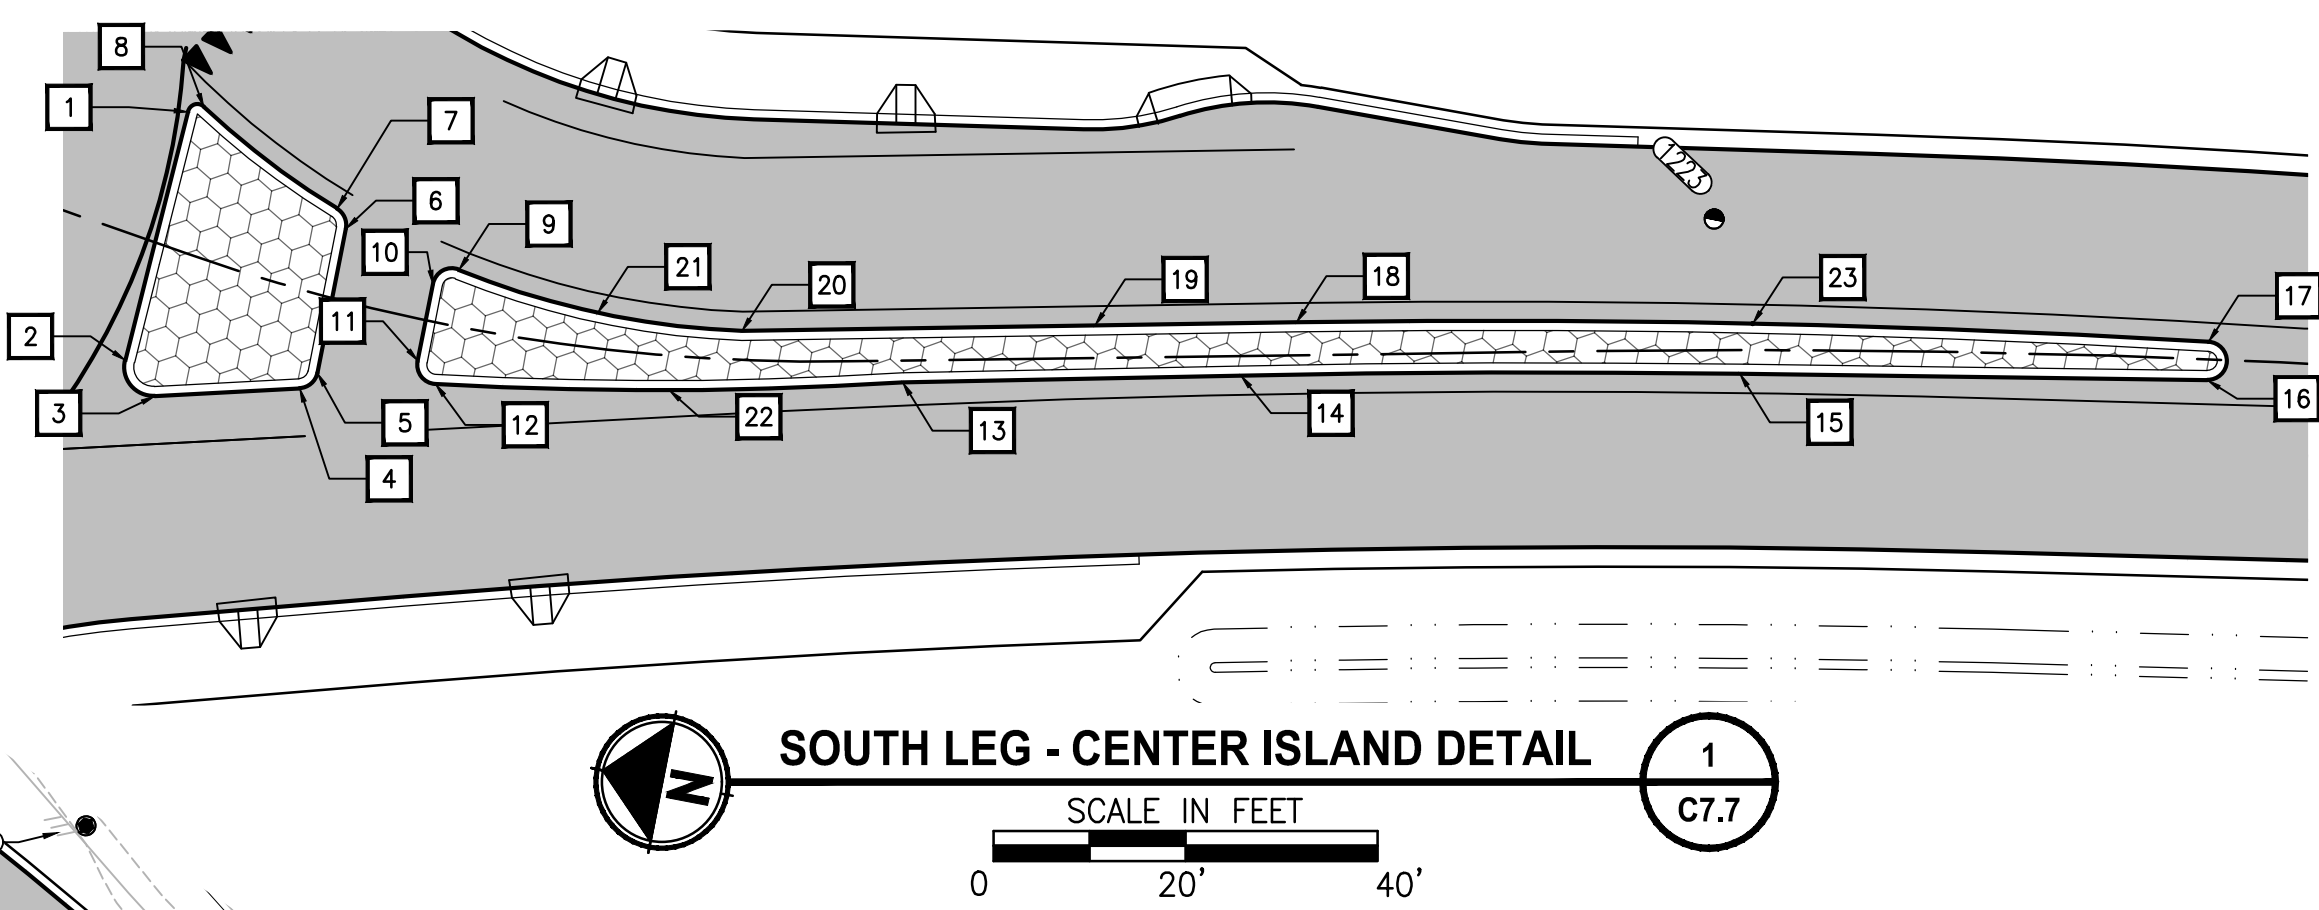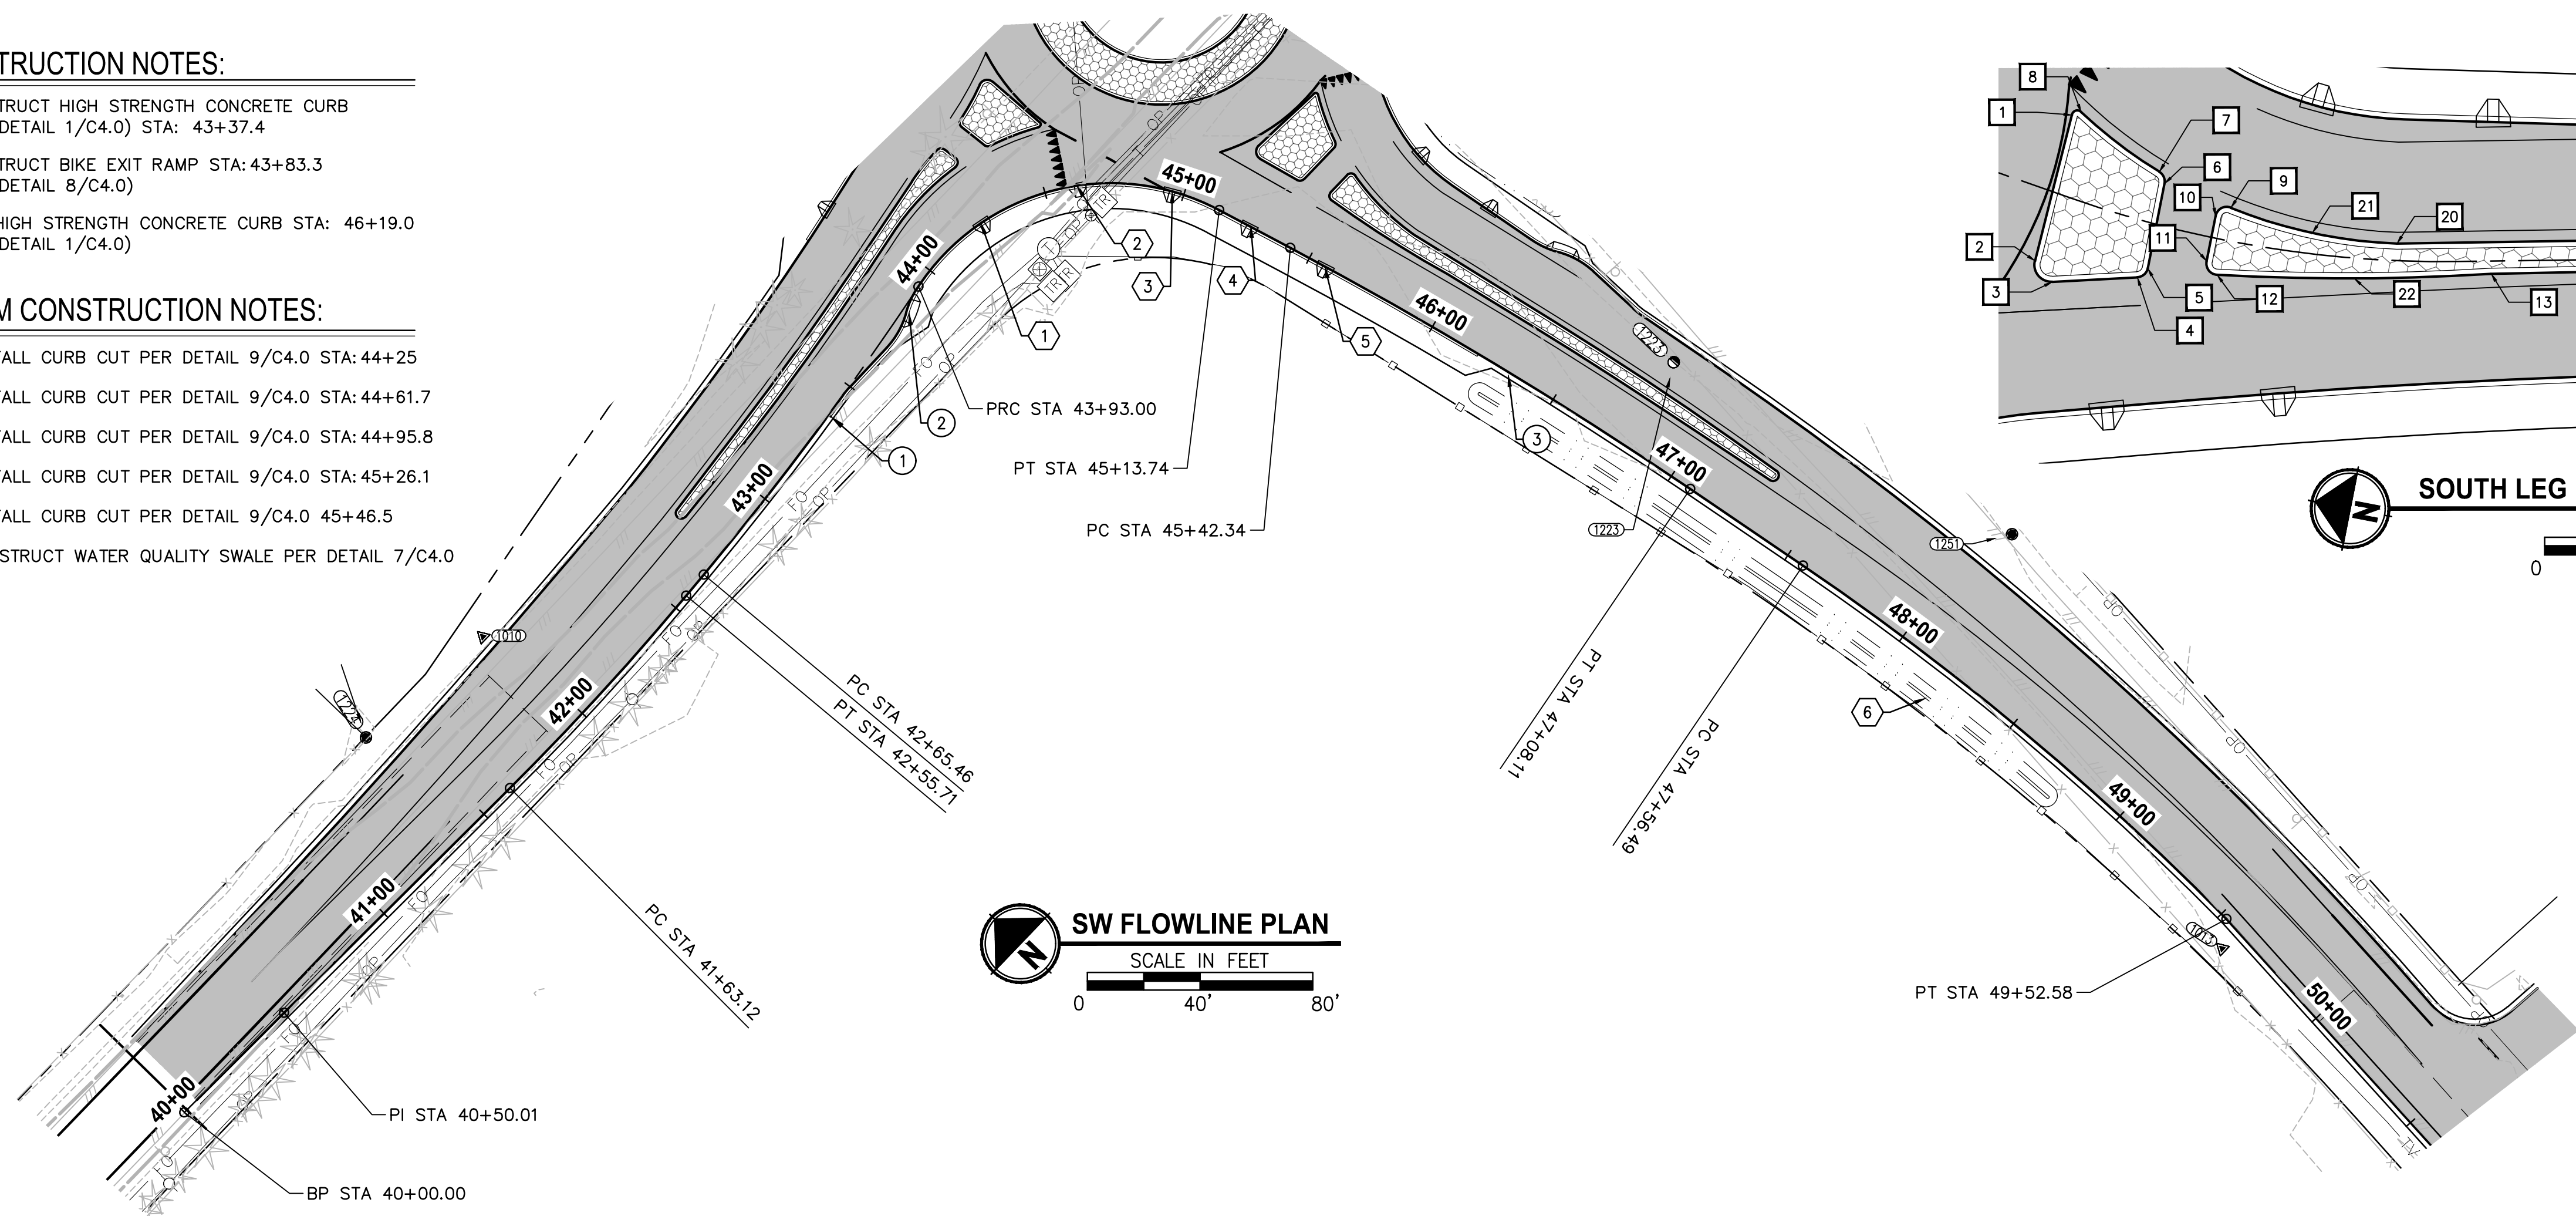


| CURB RETURN TABLE | | | | |
|-------------------|---------------------|-----------|------|----------|
| POINT | FL @ FOC LOCATION | ELEVATION | DESC | RADIUS |
| 1 | STA 210+20/13.99 LT | 3275.90 | PT | |
| 2 | STA 210+23/12.60 RT | 3275.86 | PC | 3' |
| 3 | STA 210+27/15.11 RT | 3275.77 | PT | |
| 4 | STA 210+40/9.96 RT | 3275.62 | PC | 2' |
| 5 | STA 210+42/7.93 RT | 3275.64 | PT | |
| 6 | STA 210+41/7.38 LT | 3275.66 | PC | 2' |
| 7 | STA 210+39/9.16 LT | 3275.66 | PRC | 87' |
| 8 | STA 210+22/14.99 LT | 3275.87 | PRC | 1' |
| 9 | STA 210+53/5.83 LT | 3275.55 | PRC | 2' |
| 10 | STA 210+51/3.85 LT | 3275.61 | PT | |
| 11 | STA 210+51/4.31 RT | 3275.59 | PC | 2' |
| 12 | STA 210+53/6.27 RT | 3275.54 | PCC | 403.20' |
| 13 | STA 211+01/2.26 RT | 3275.18 | PT | |
| 14 | STA 211+36/2.03 RT | 3274.88 | PC | 1539.40' |
| 15 | STA 211+88/2.47 RT | 3274.43 | PT | |
| 16 | STA 212+37/2.19 RT | 3274.07 | PC | 2' |
| 17 | STA 212+37/1.81 LT | 3274.15 | PCC | 1287' |
| 18 | STA 211+42/3.43 LT | 3274.85 | PT | |
| 19 | STA 211+21/3.39 LT | 3275.01 | | |
| 20 | STA 210+84/3.02 LT | 3275.31 | PC | 87' |
| 21 | STA 210+69/3.69 LT | 3275.44 | MID | 87' |
| 22 | STA 210+77/3.59 RT | 3275.37 | MID | 403.2' |
| 23 | STA 211+90/2.76 LT | 3274.48 | MID | 1287' |

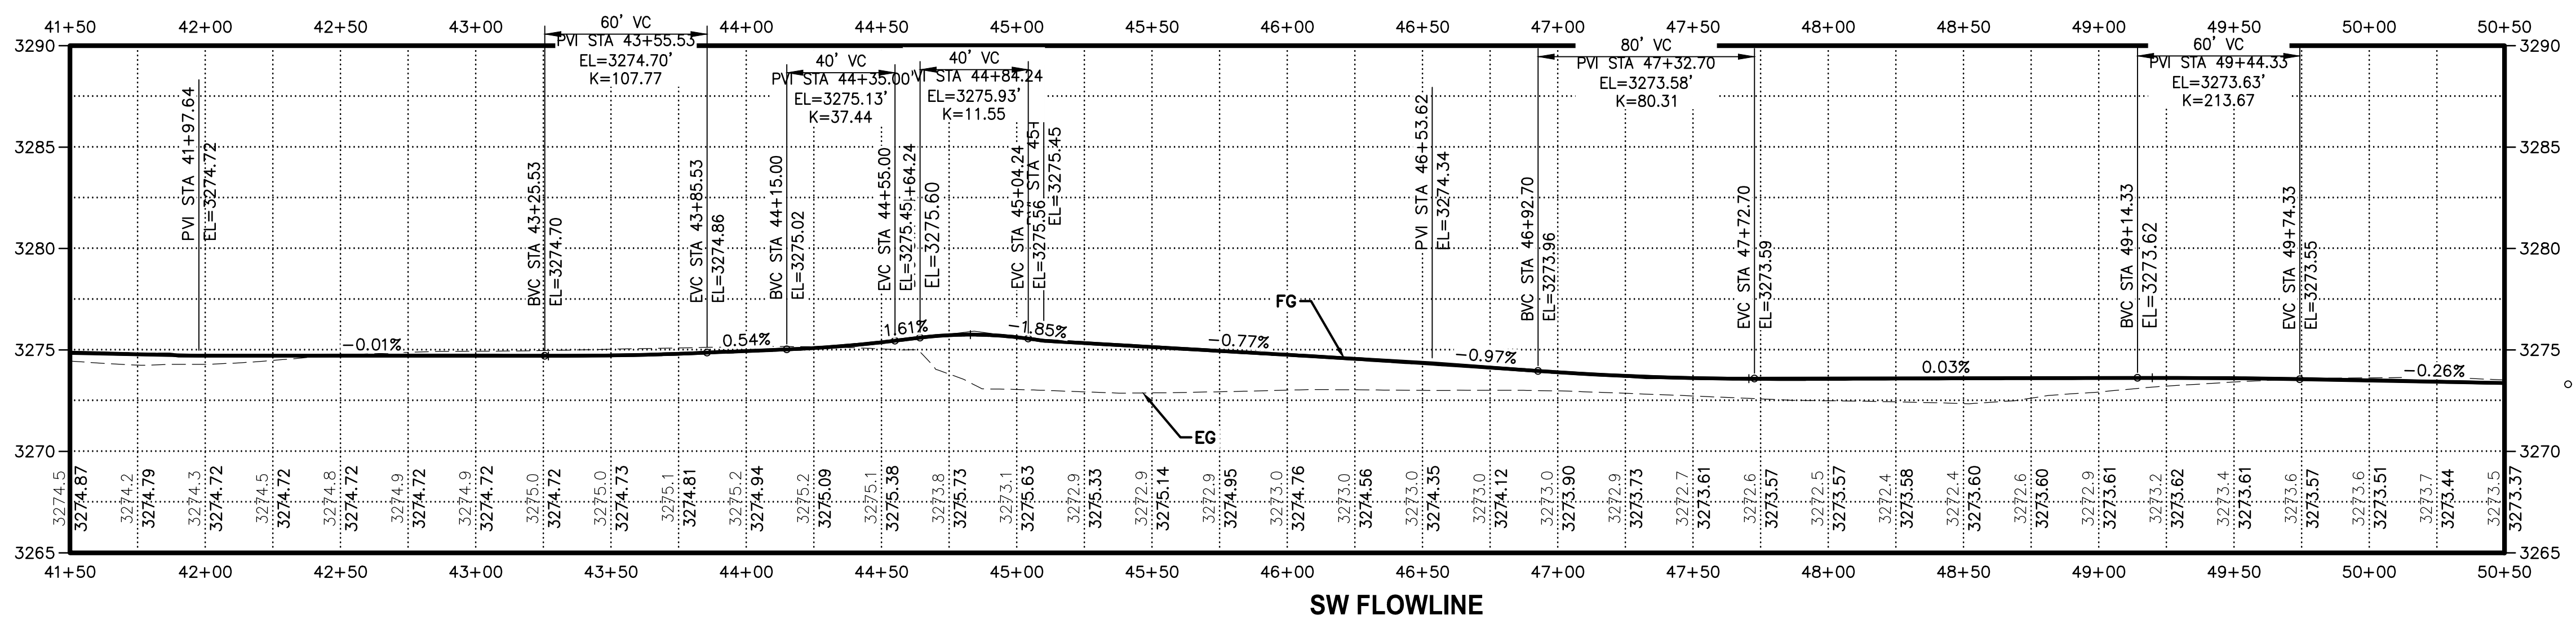

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE.
IF NOT, SCALE ACCORDINGLY

FILE NAME: BE2509005-C7.7-PP00
 JOB No: 297-2509-005
 DATE: 12/2019

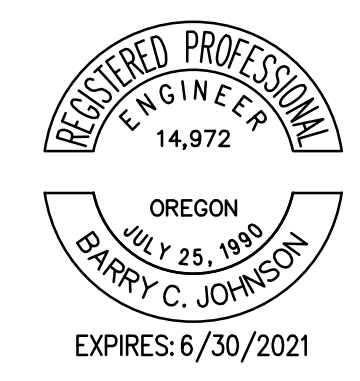

PROJECT NAME
**OLD BEND-REDMOND
 HIGHWAY/ TUMALO RD
 INTERSECTION IMPROVEMENTS**



SW FLOWLINE - PLAN & PROFILE

FOR BIDDING REFERENCE ONLY


DRAWING NO.
17 OF 43

C7.7

PATH: U:\Bent\Projects\Clients\2509-deschutes county\297-2509-005 obrh design phase\995\ca\CADD\DWG\tumalo rd rcta\CDS
 PLOTTED BY: rceday DATE: Friday, April 3, 2020 9:28:21 AM
 LAYOUT: C7.8 SITE A - PLAN & PROFILE

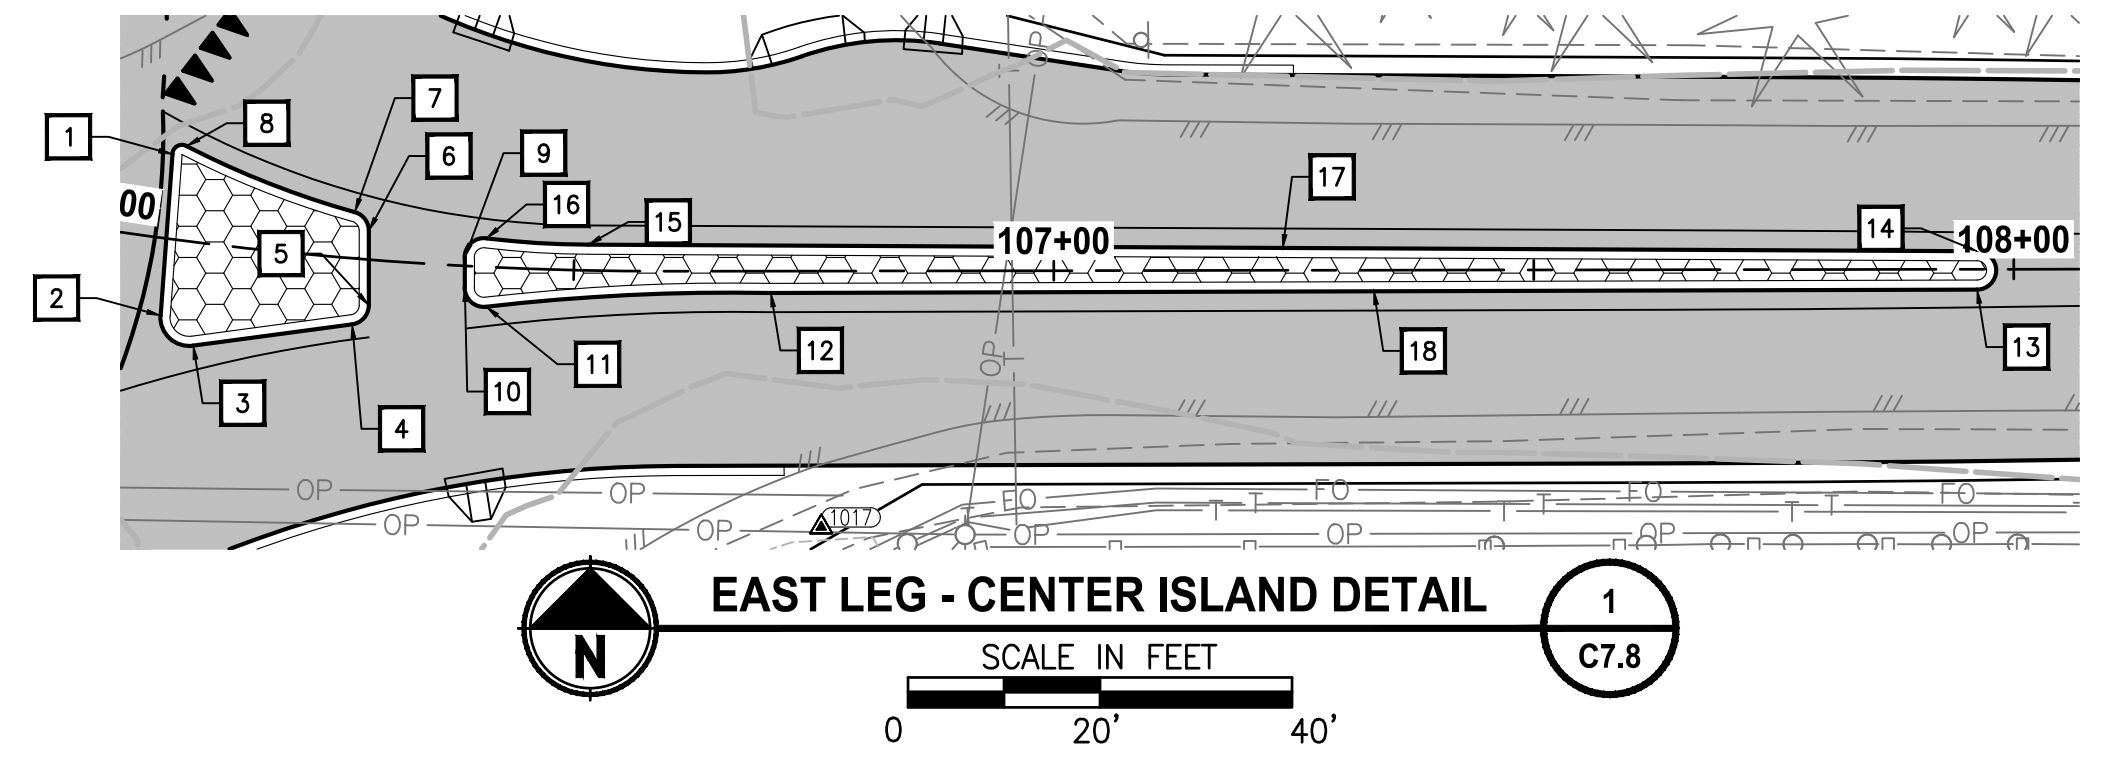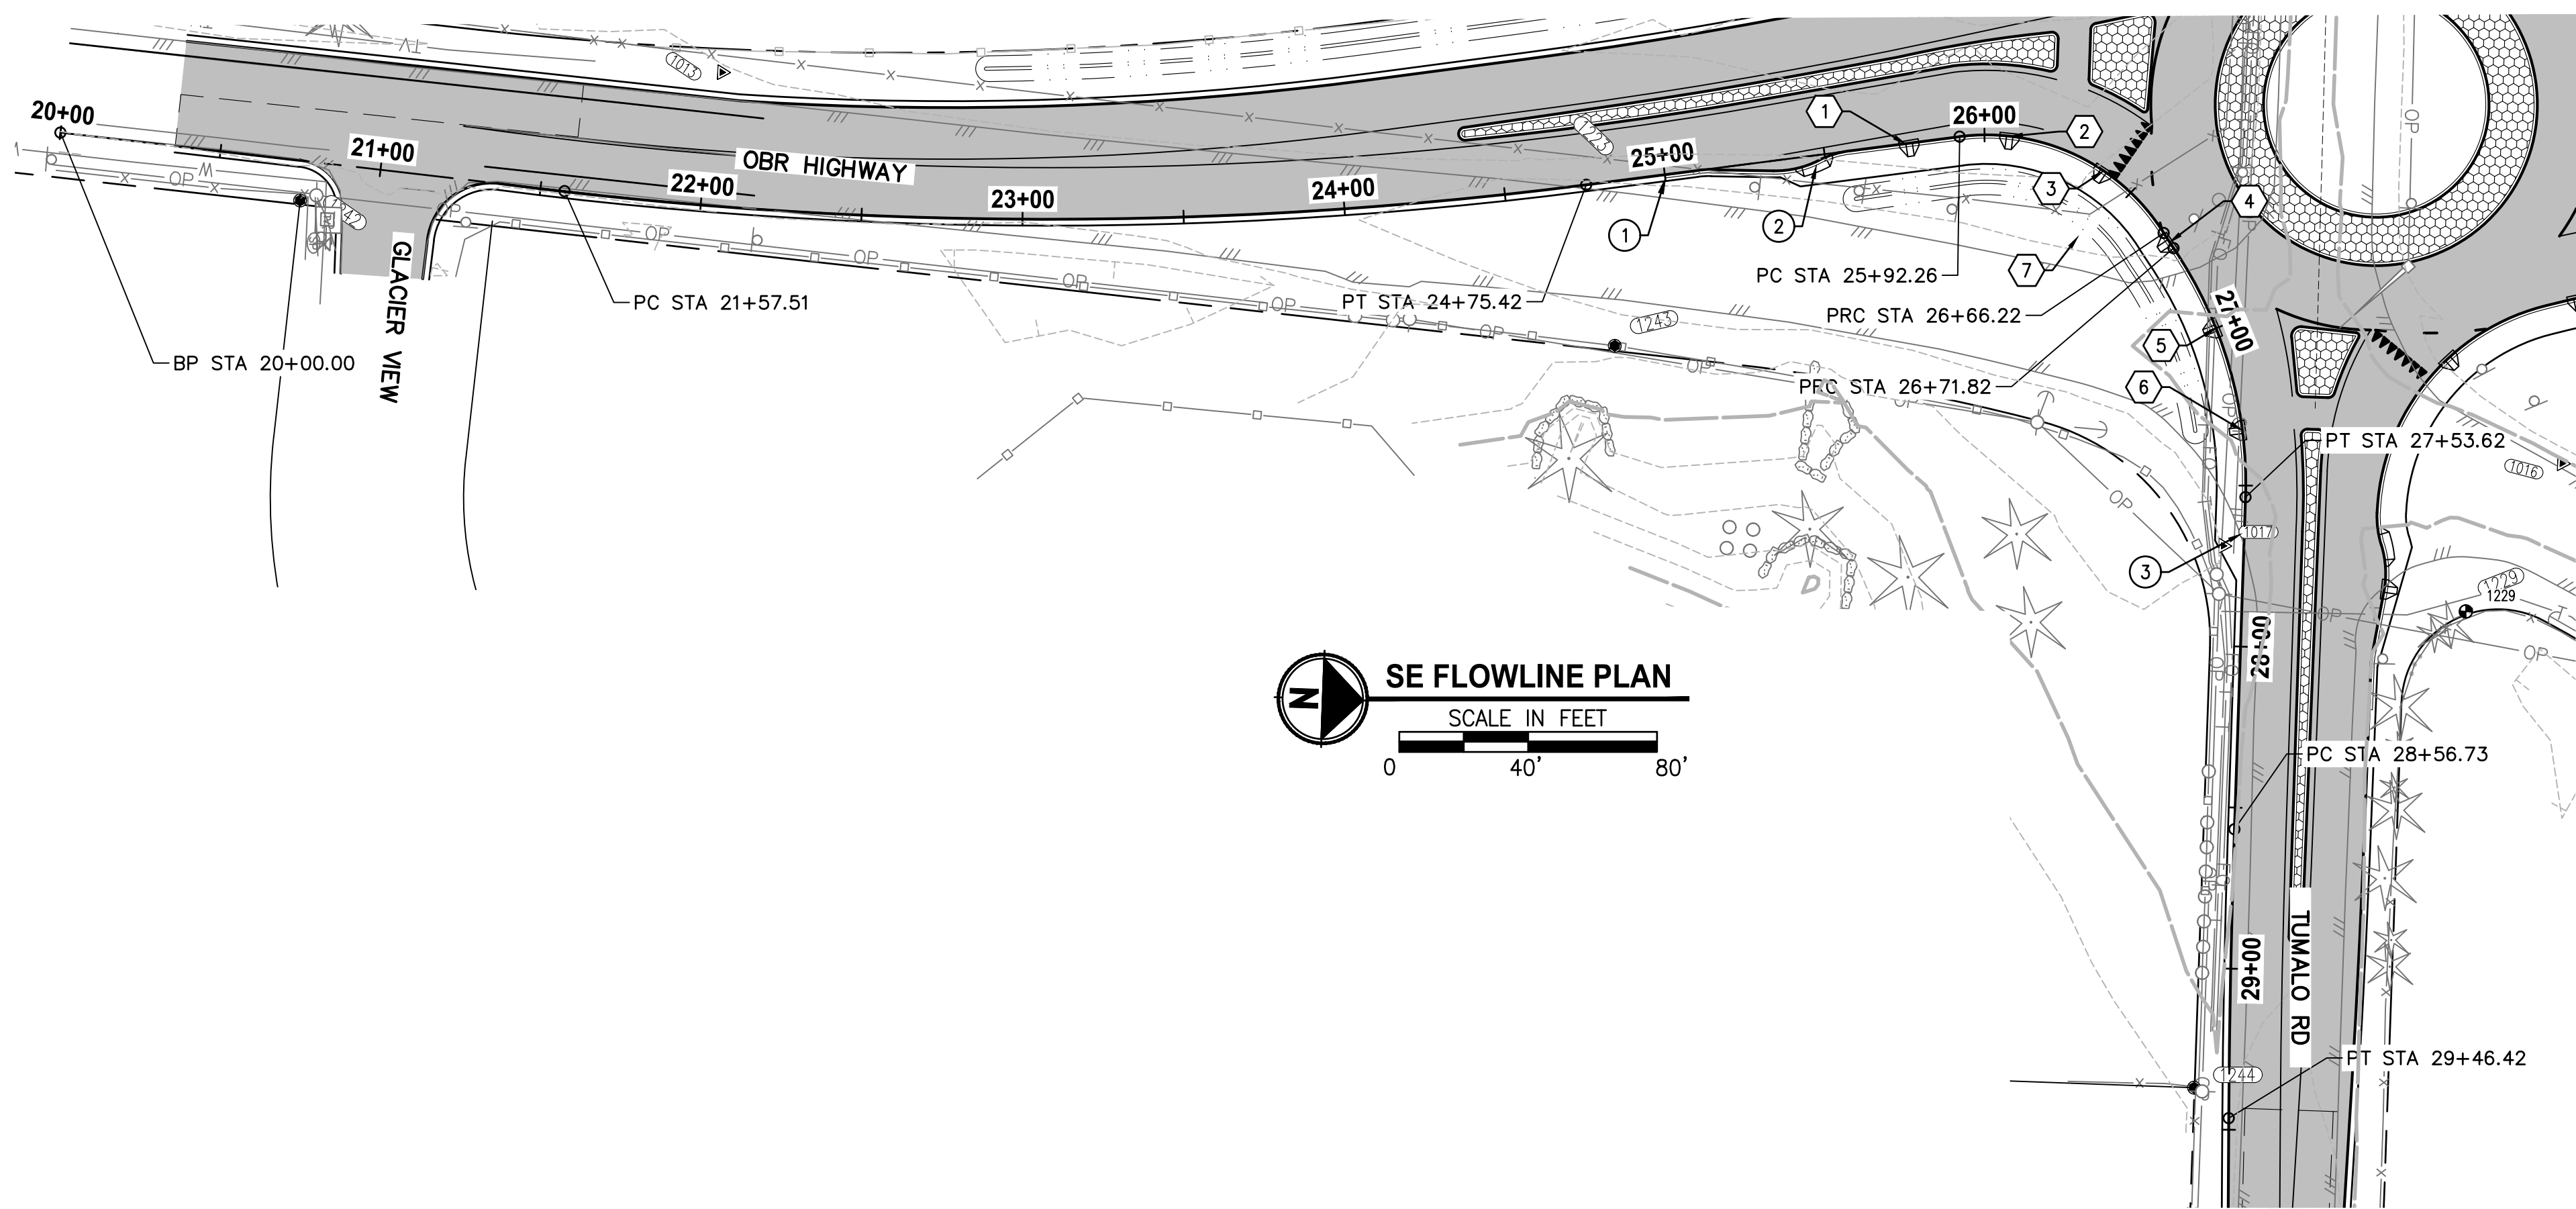


- CONSTRUCTION NOTES:**
- ① CONSTRUCT HIGH STRENGTH CONCRETE CURB STA: 25+00.2 (SEE DETAIL 1/C4.0)
 - ② CONSTRUCT BIKE EXIT RAMP STA: 25+46.3 (SEE DETAIL 8/C4.0)
 - ③ END HIGH STRENGTH CONCRETE CURB STA: 27+65.1
- STORM CONSTRUCTION NOTES:**
- ① INSTALL CURB CUT PER DETAIL 9/C4.0 STA: 25+76.4
 - ② INSTALL CURB CUT PER DETAIL 9/C4.0 STA: 26+07.9
 - ③ INSTALL CURB CUT PER DETAIL 9/C4.0 STA: 26+39.2
 - ④ INSTALL CURB CUT PER DETAIL 9/C4.0 STA: 26+69.6
 - ⑤ INSTALL CURB CUT PER DETAIL 9/C4.0 STA: 27+00
 - ⑥ INSTALL CURB CUT PER DETAIL 9/C4.0 STA: 27+32.9
 - ⑦ CONSTRUCT WATER QUALITY SWALE PER DETAIL 7/C4.0

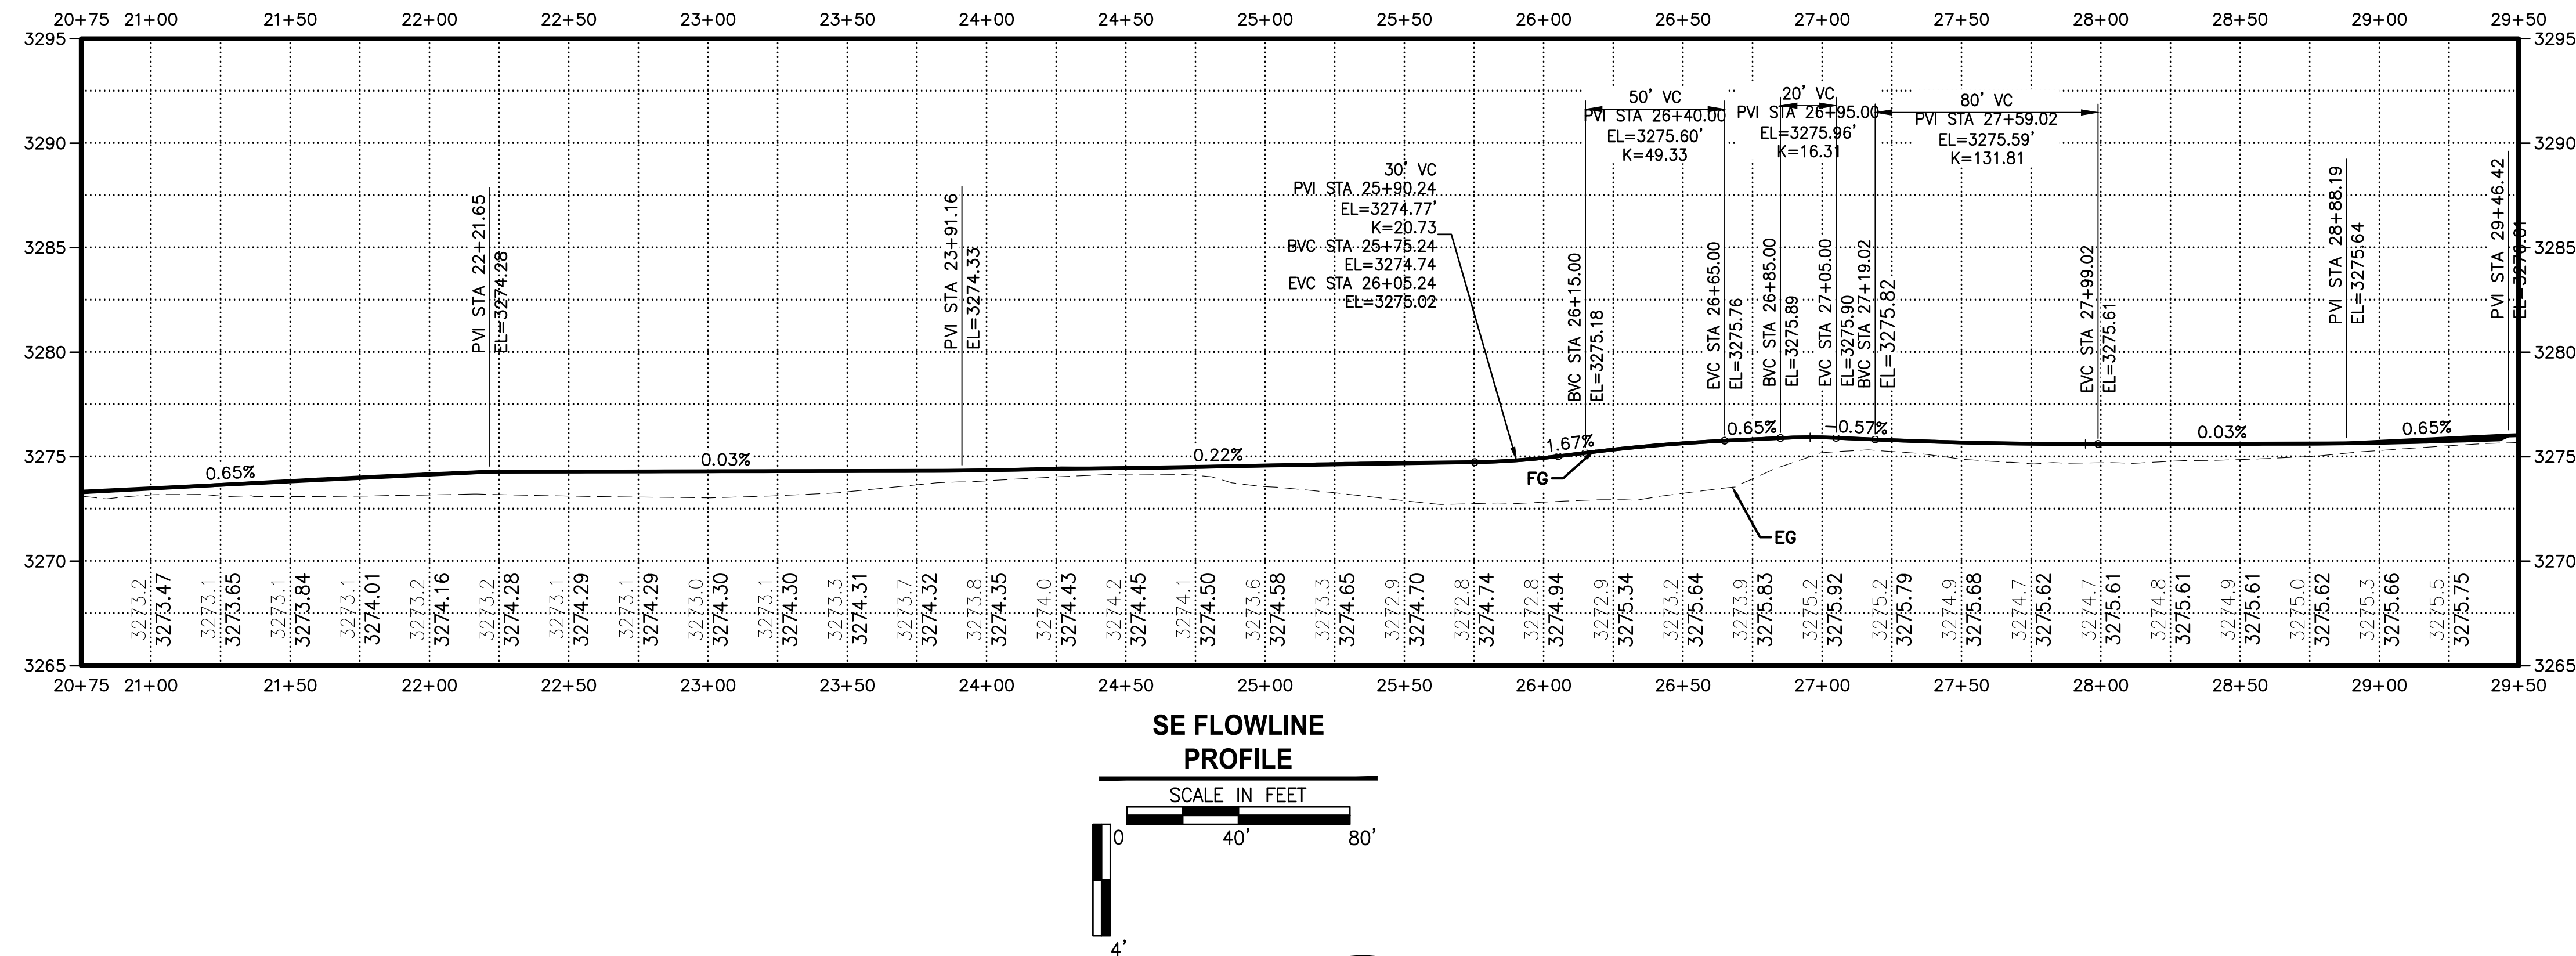

| CURB RETURN TABLE | | | | |
|-------------------|---------------------|-----------|------|--------|
| POINT | FL @ FOC LOCATION | ELEVATION | DESC | RADIUS |
| 1 | STA 106+07/8.79 LT | 3275.99' | PT | |
| 2 | STA 106+08/8.03 RT | 3275.83' | PC | 3' |
| 3 | STA 106+12/10.72 RT | 3275.73' | PT | |
| 4 | STA 106+27/6.84 RT | 3275.58' | PC | 2' |
| 5 | STA 106+29/4.73 RT | 3275.60' | PT | |
| 6 | STA 106+28/3.01 LT | 3275.75' | PC | 2' |
| 7 | STA 106+27/4.82 LT | 3275.79' | PRC | 92' |
| 8 | STA 106+08/9.83 LT | 3276.02' | PRC | 1' |
| 9 | STA 106+39/0.89 LT | 3275.63' | PT | |
| 10 | STA 106+41/4.13 RT | 3275.51' | PRC | 226' |
| 11 | STA 106+71/2.27 RT | 3275.44' | PT | |
| 12 | STA 106+41/2.25 RT | 3275.56' | PC | 2' |
| 13 | STA 107+96/2.11 RT | 3275.88' | PC | 2' |
| 14 | STA 107+96/1.89 LT | 3275.86' | PT | |
| 15 | STA 106+51/2.68 LT | 3275.55' | PC | 92' |
| 16 | STA 106+41/2.98 LT | 3275.65' | PRC | 2' |
| 17 | STA 107+24/2.33 LT | 0.00' | MID | |
| 18 | STA 107+33/2.19 RT | 3275.97' | MID | |

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | DR |
| | | | DRAWN |
| | | | DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY.
 FILE NAME: BE2509005-C7.8-PP00
 JOB No: 297-2509-005
 DATE: 12/2019


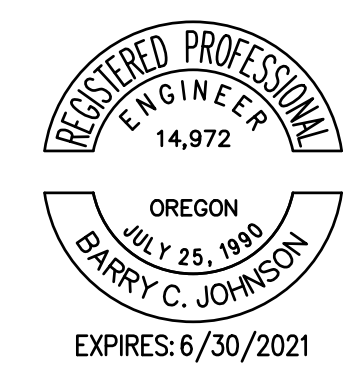


PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS

FOR BIDDING REFERENCE ONLY
SE FLOWLINE - PLAN & PROFILE

DRAWING NO.
 18 OF 43
C7.8

LAYOUT: C7.9 SITE A STAGE ONE PATH: U:\Bend\Projects\Clients\2509-deschutes county\297-2509-005-obrh-design_phase\995\cs\CADD\DWG\tumalo rd_rba\CD'S PLOTTED BY: ricodov DATE: Friday, April 3, 2020 9:29:35 AM

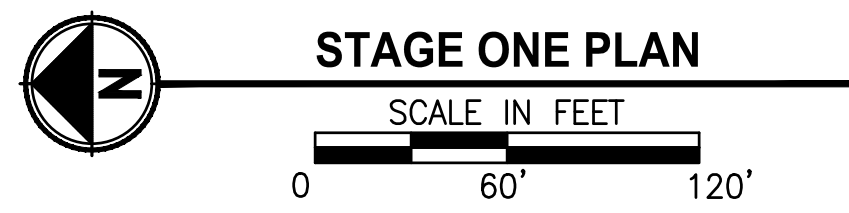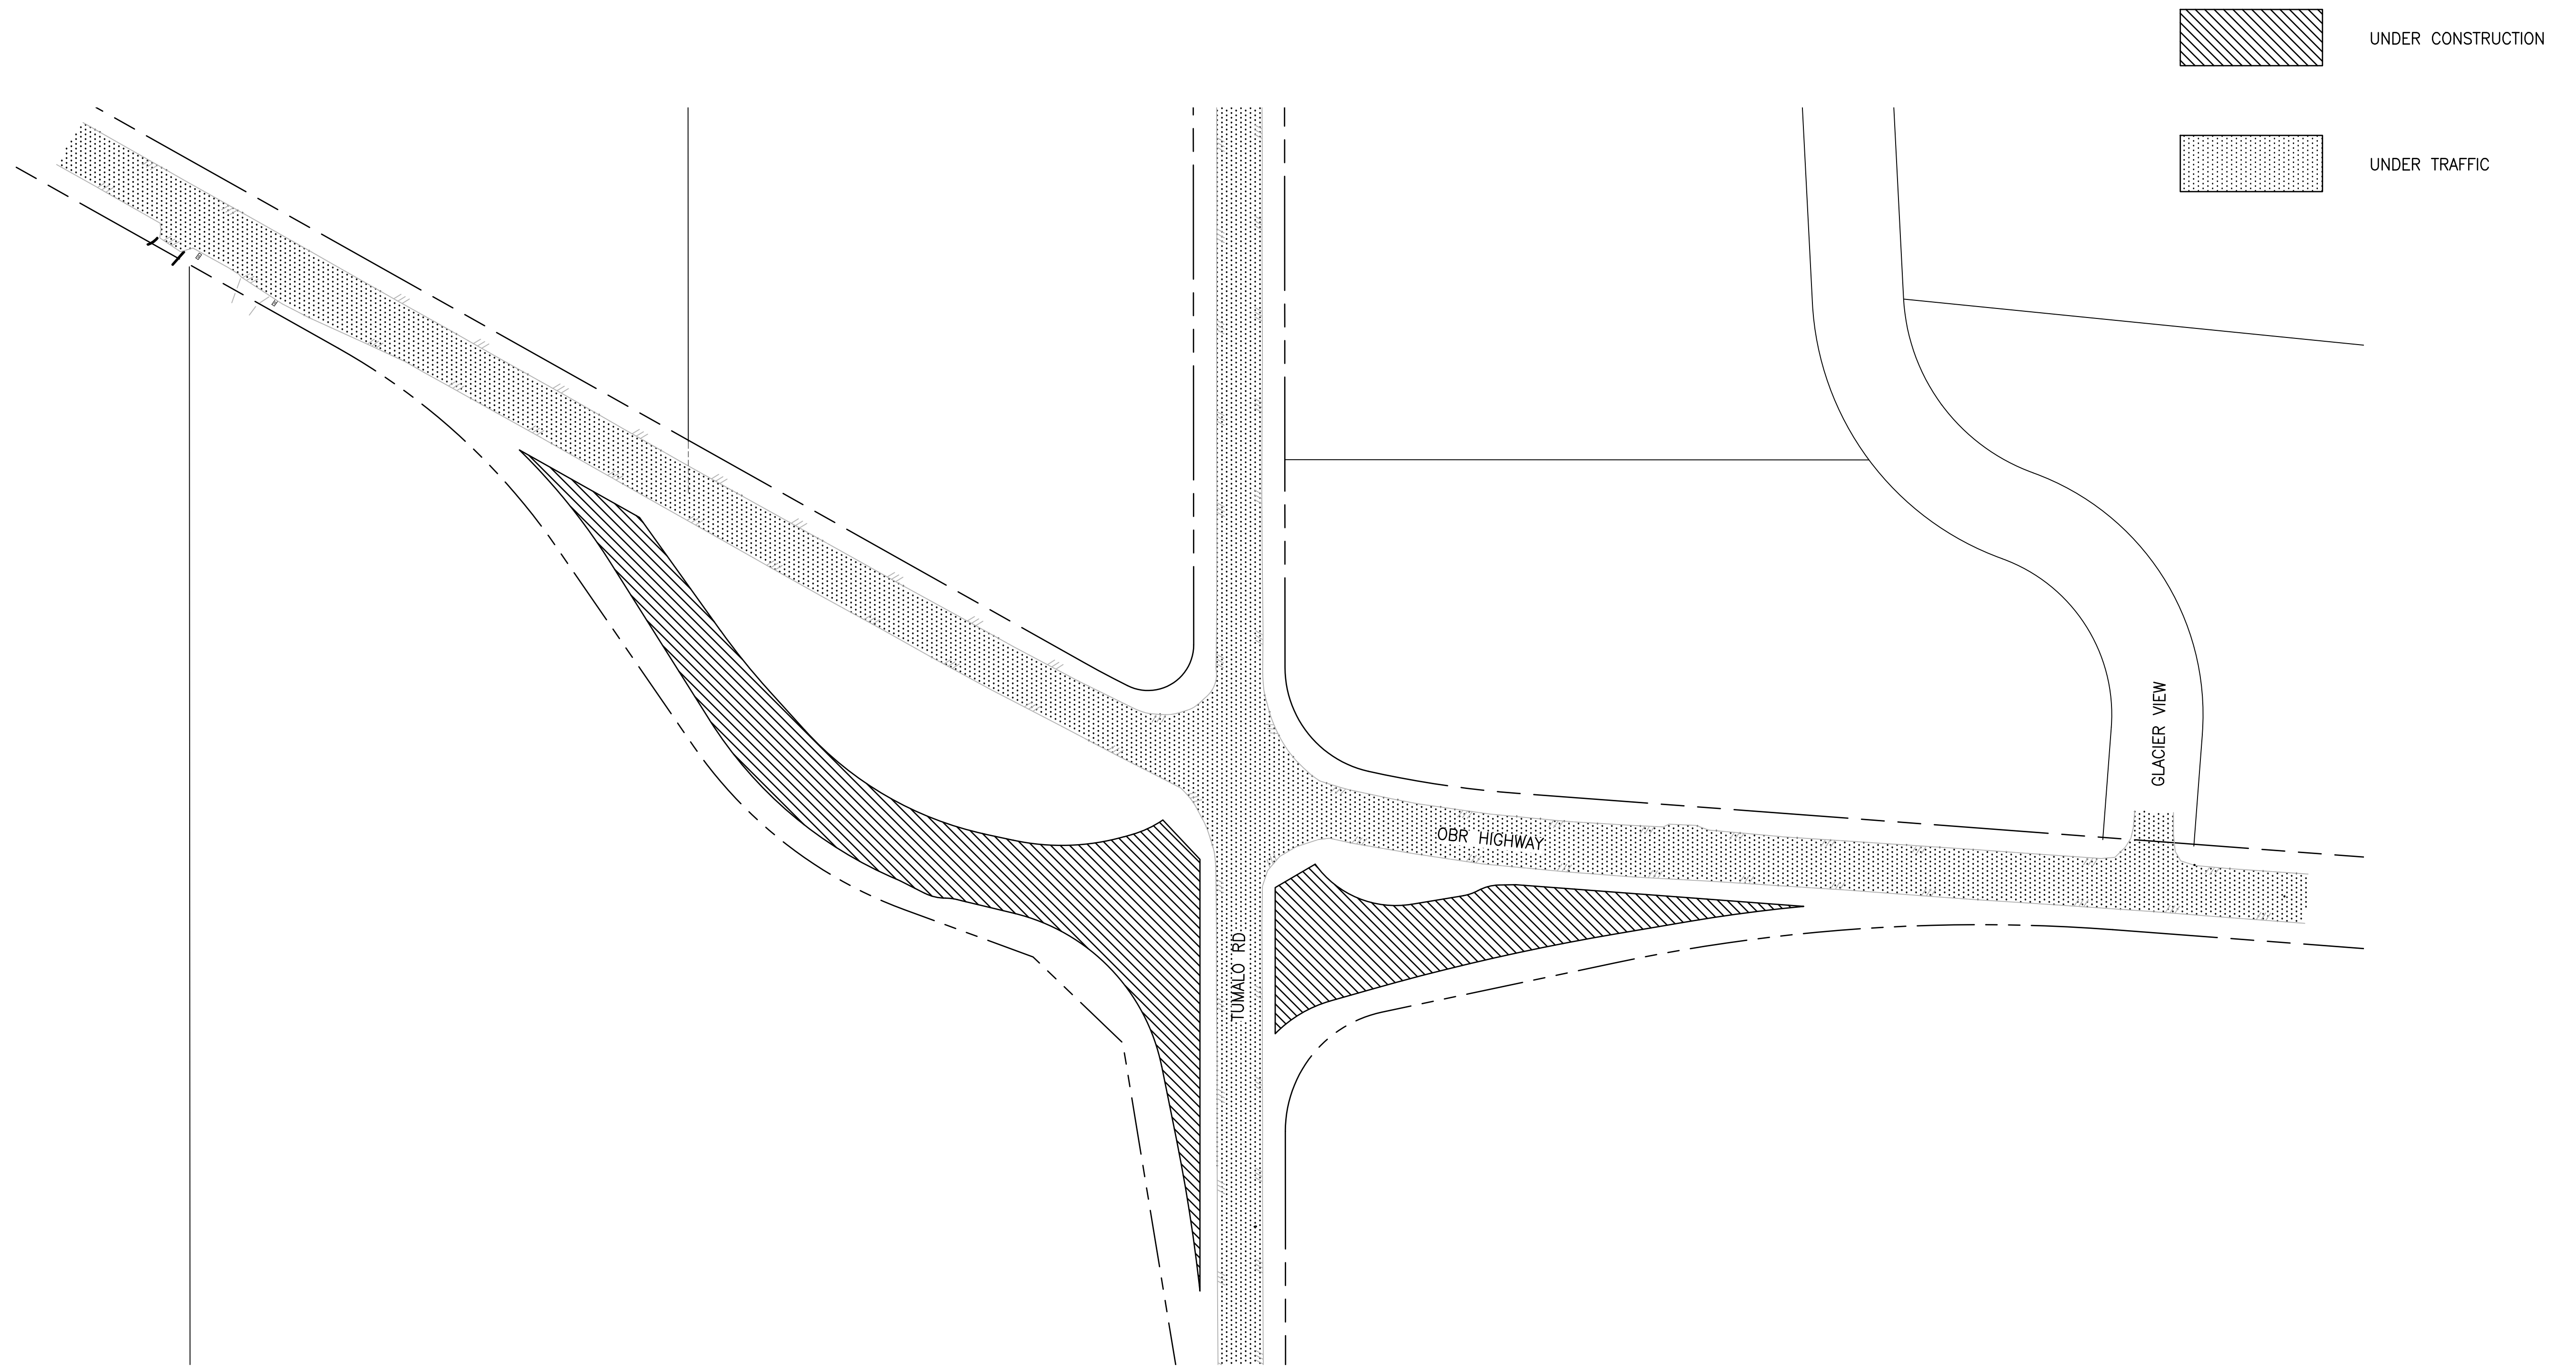


| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | DR |
| | | | DRAWN |
| | | | DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

ONE INCH AT FULL SCALE.
IF NOT, SCALE ACCORDINGLY

FILE NAME
BE2509005-C7.9-ST00

JOB No.
297-2509-005

DATE
12/2019



PROJECT NAME
**OLD BEND-REDMOND
HIGHWAY/ TUMALO RD
INTERSECTION IMPROVEMENTS**


FOR BIDDING REFERENCE ONLY

**CONSTRUCTION
STAGING - STAGE ONE**


DRAWING NO.
19 OF 43

C7.9

LAYOUT: C7.10 SITE A STAGE TWO PATH: U:\Bend\Projects\Clients\2509-deschutes county\297-2509-005 obrh design phase\99Sves\CADD\DWG\tumalo rd rbas\CD'S PLOTTED BY: ricedev DATE: Friday, April 3, 2020 9:29:38 AM

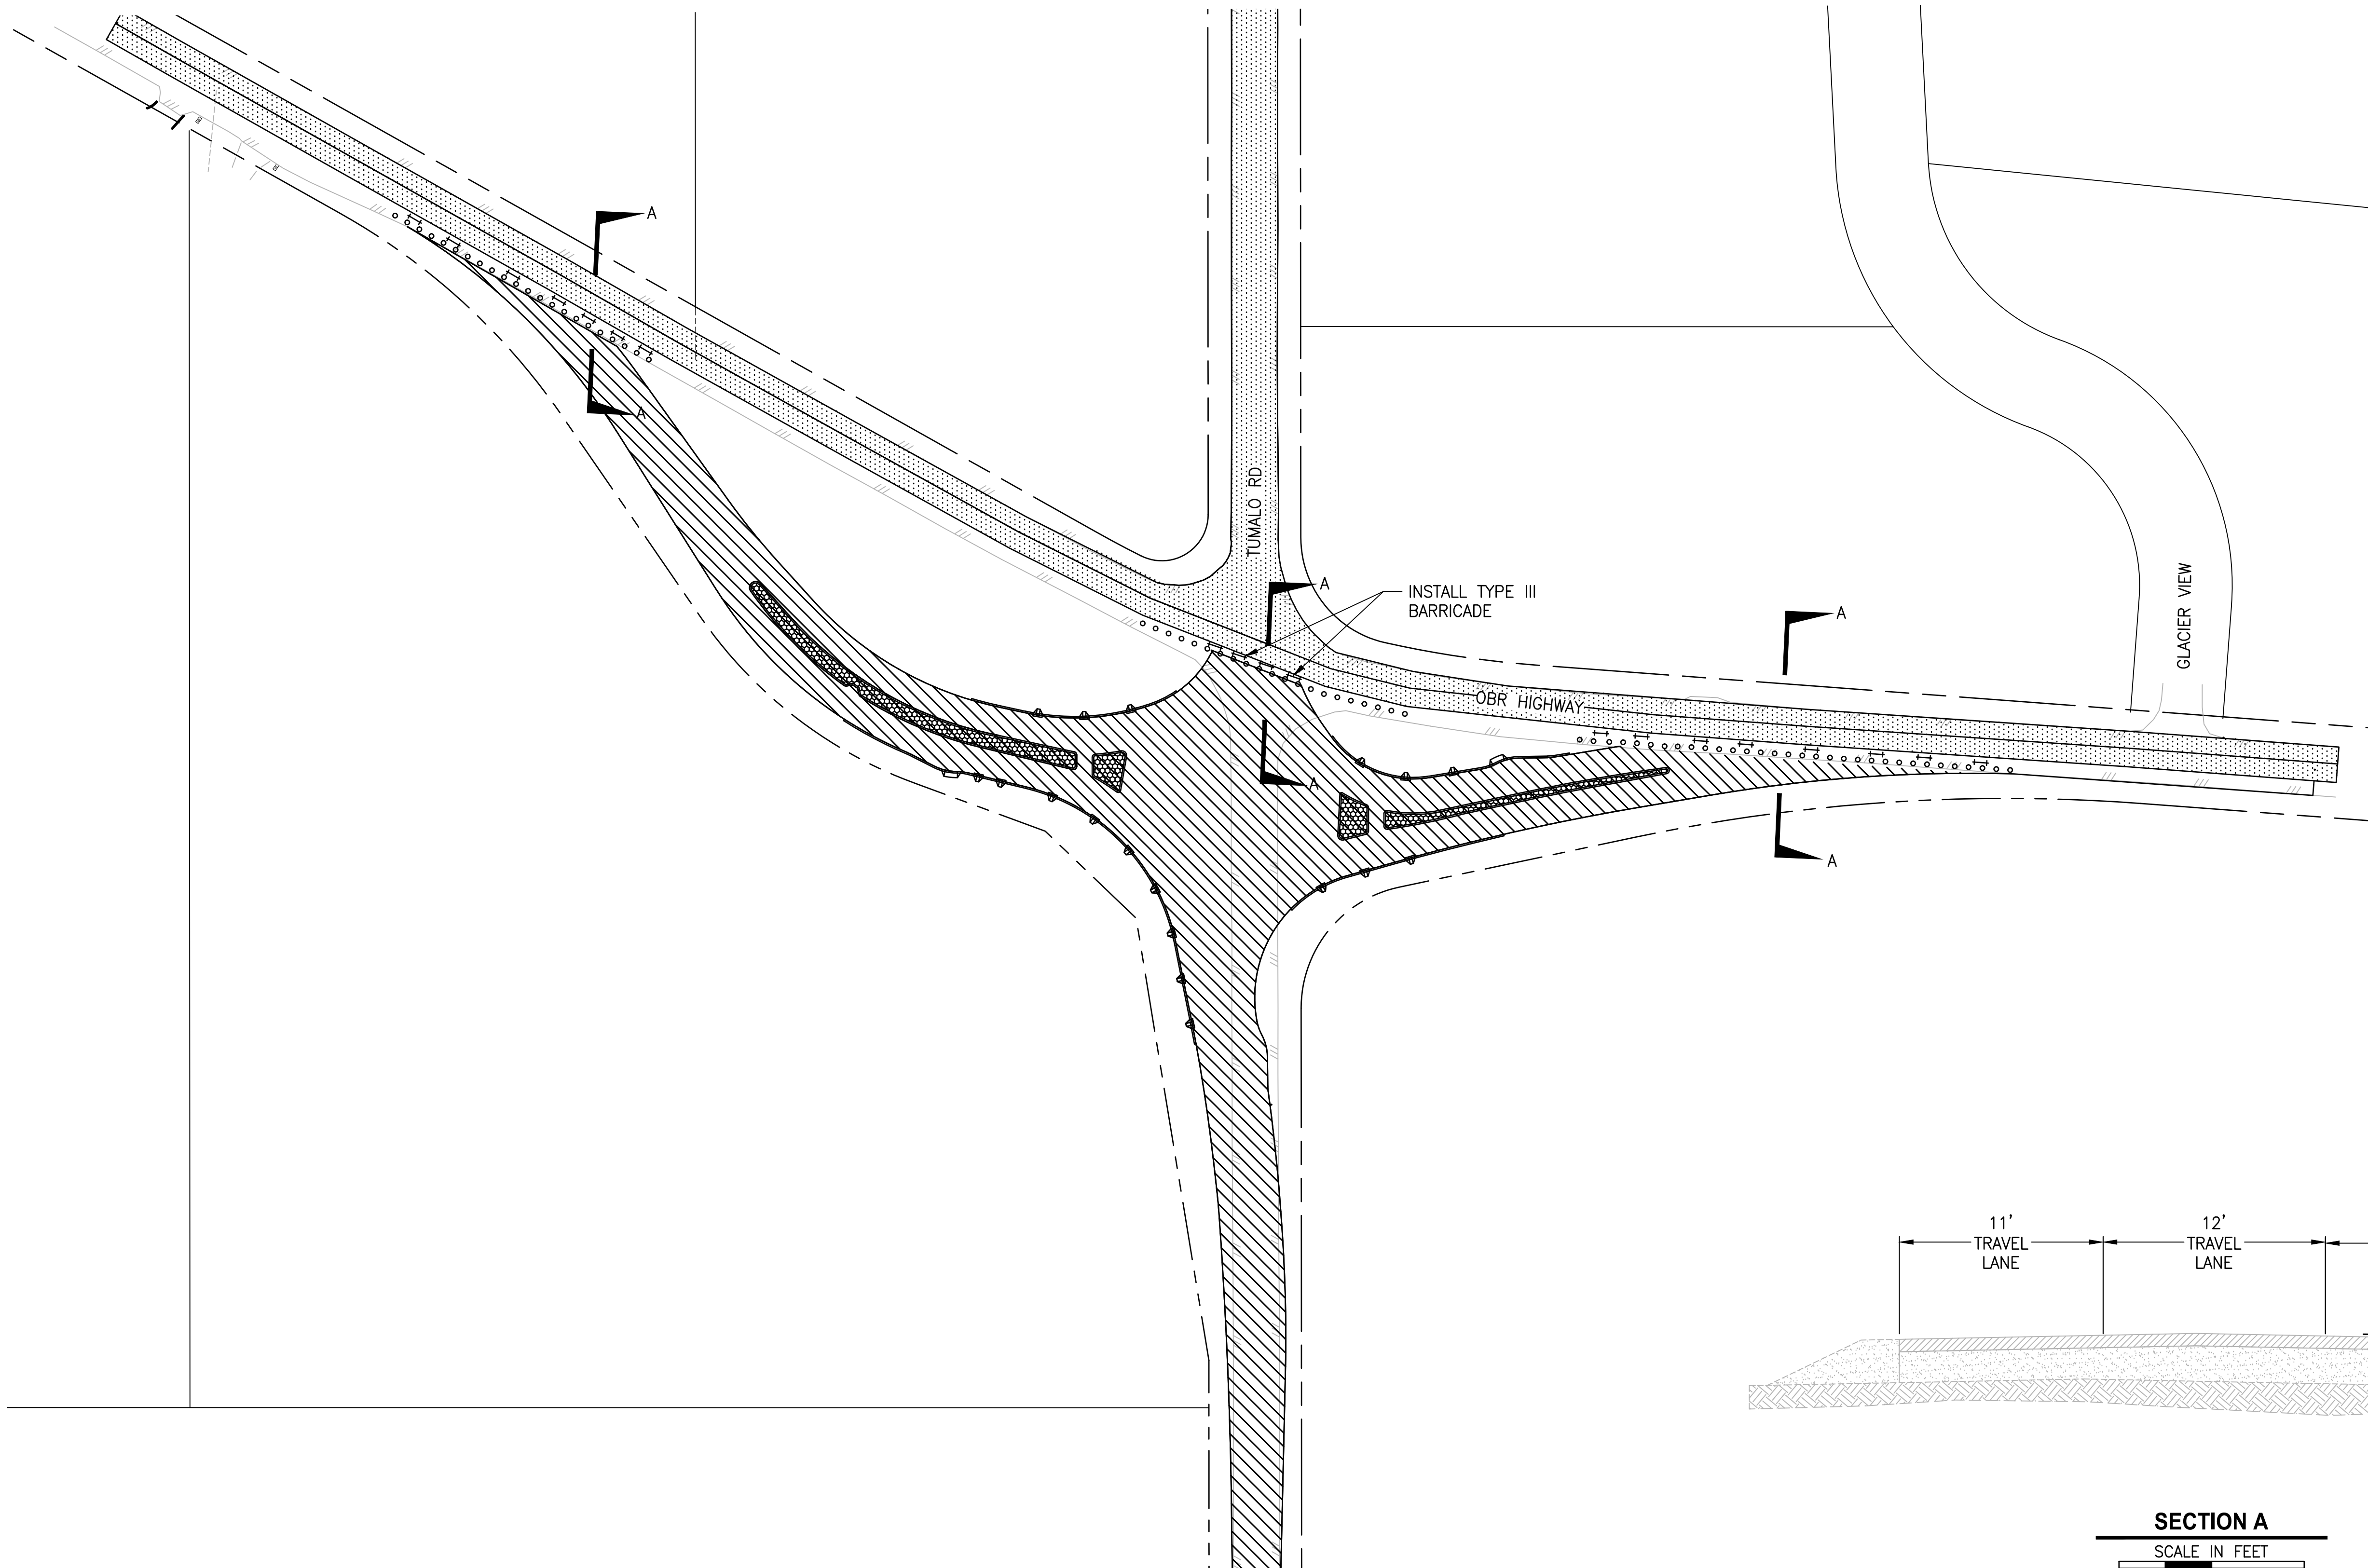


- UNDER CONSTRUCTION
- UNDER TRAFFIC
- TRAFFIC BARRELS
- TYPE III BARRICADE

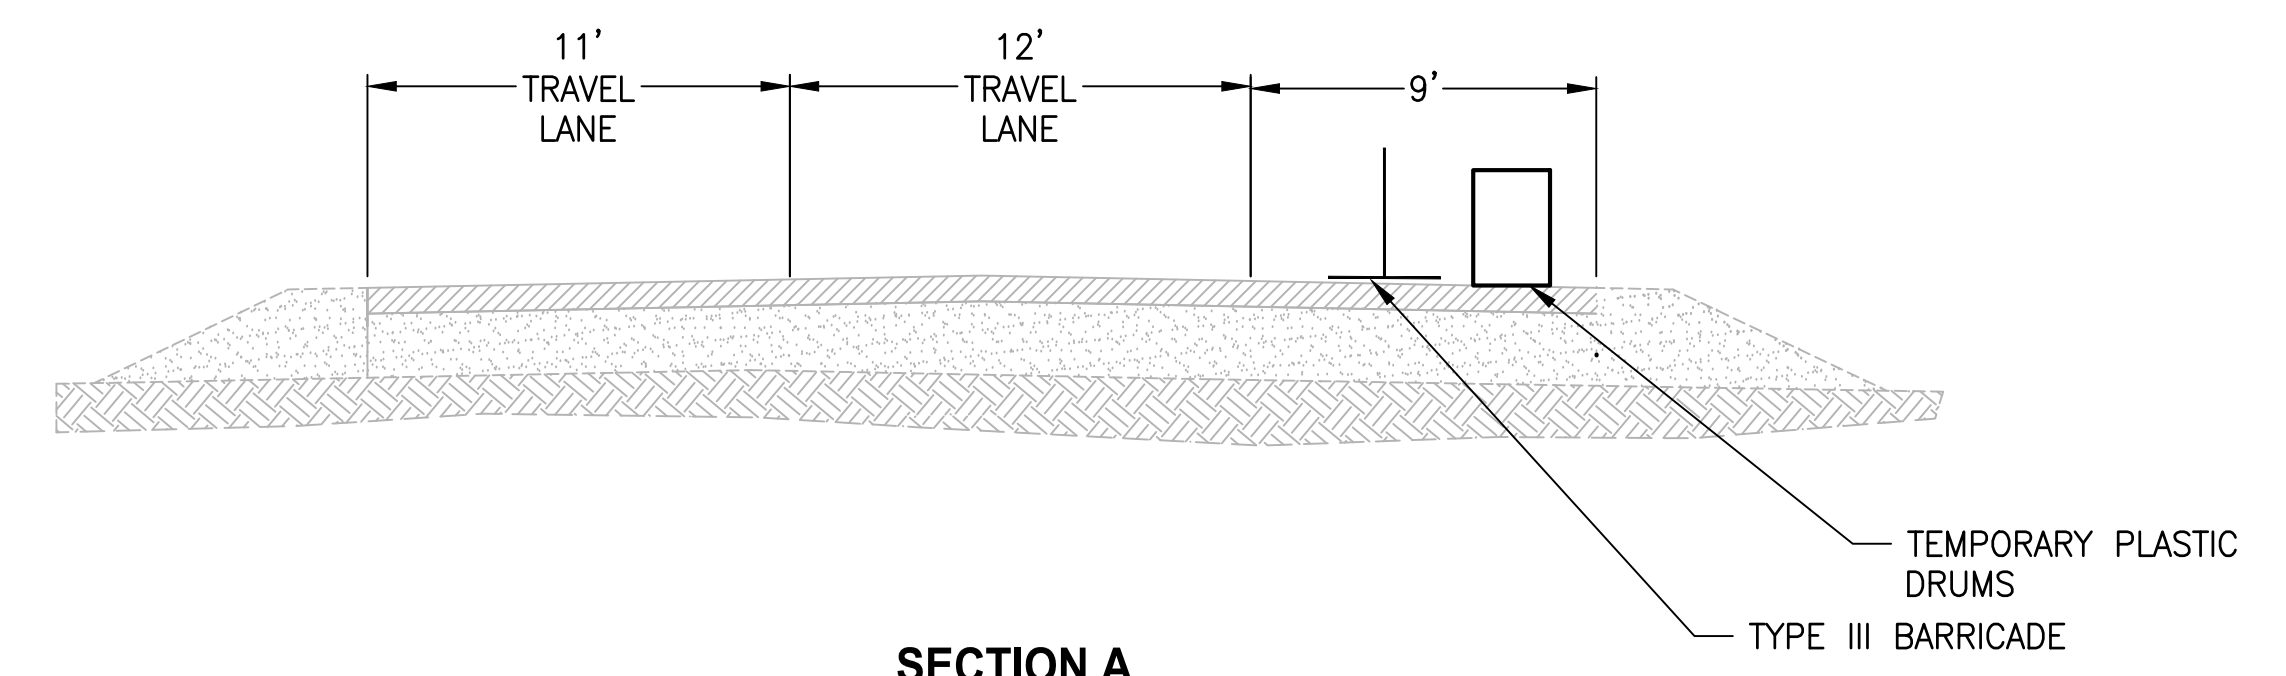


SECTION A
SCALE IN FEET
0 5 10'

STAGE TWO PLAN
SCALE IN FEET
0 60 120'



| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | DR |
| | | | DRAWN |
| | | | DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY
 FILE NAME: BE2509005-C7.9-ST00
 JOB No.: 297-2509-005
 DATE: 12/2019

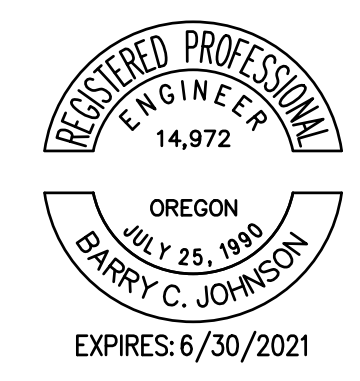


PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS

CONSTRUCTION STAGING - STAGE TWO


DRAWING NO.
 20 OF 43
C7.10

FOR BIDDING REFERENCE ONLY

LAYOUT: C7.11 SITE A STAGE THREE PATH: U:\Bend\Projects\Clients\2509-deschutes county\297-2509-005-obrh-design phase\995\cadd\dwg\tumalo rd rba\CD'S PLOTTED BY: rccody DATE: Friday, April 3, 2020 9:29:42 AM

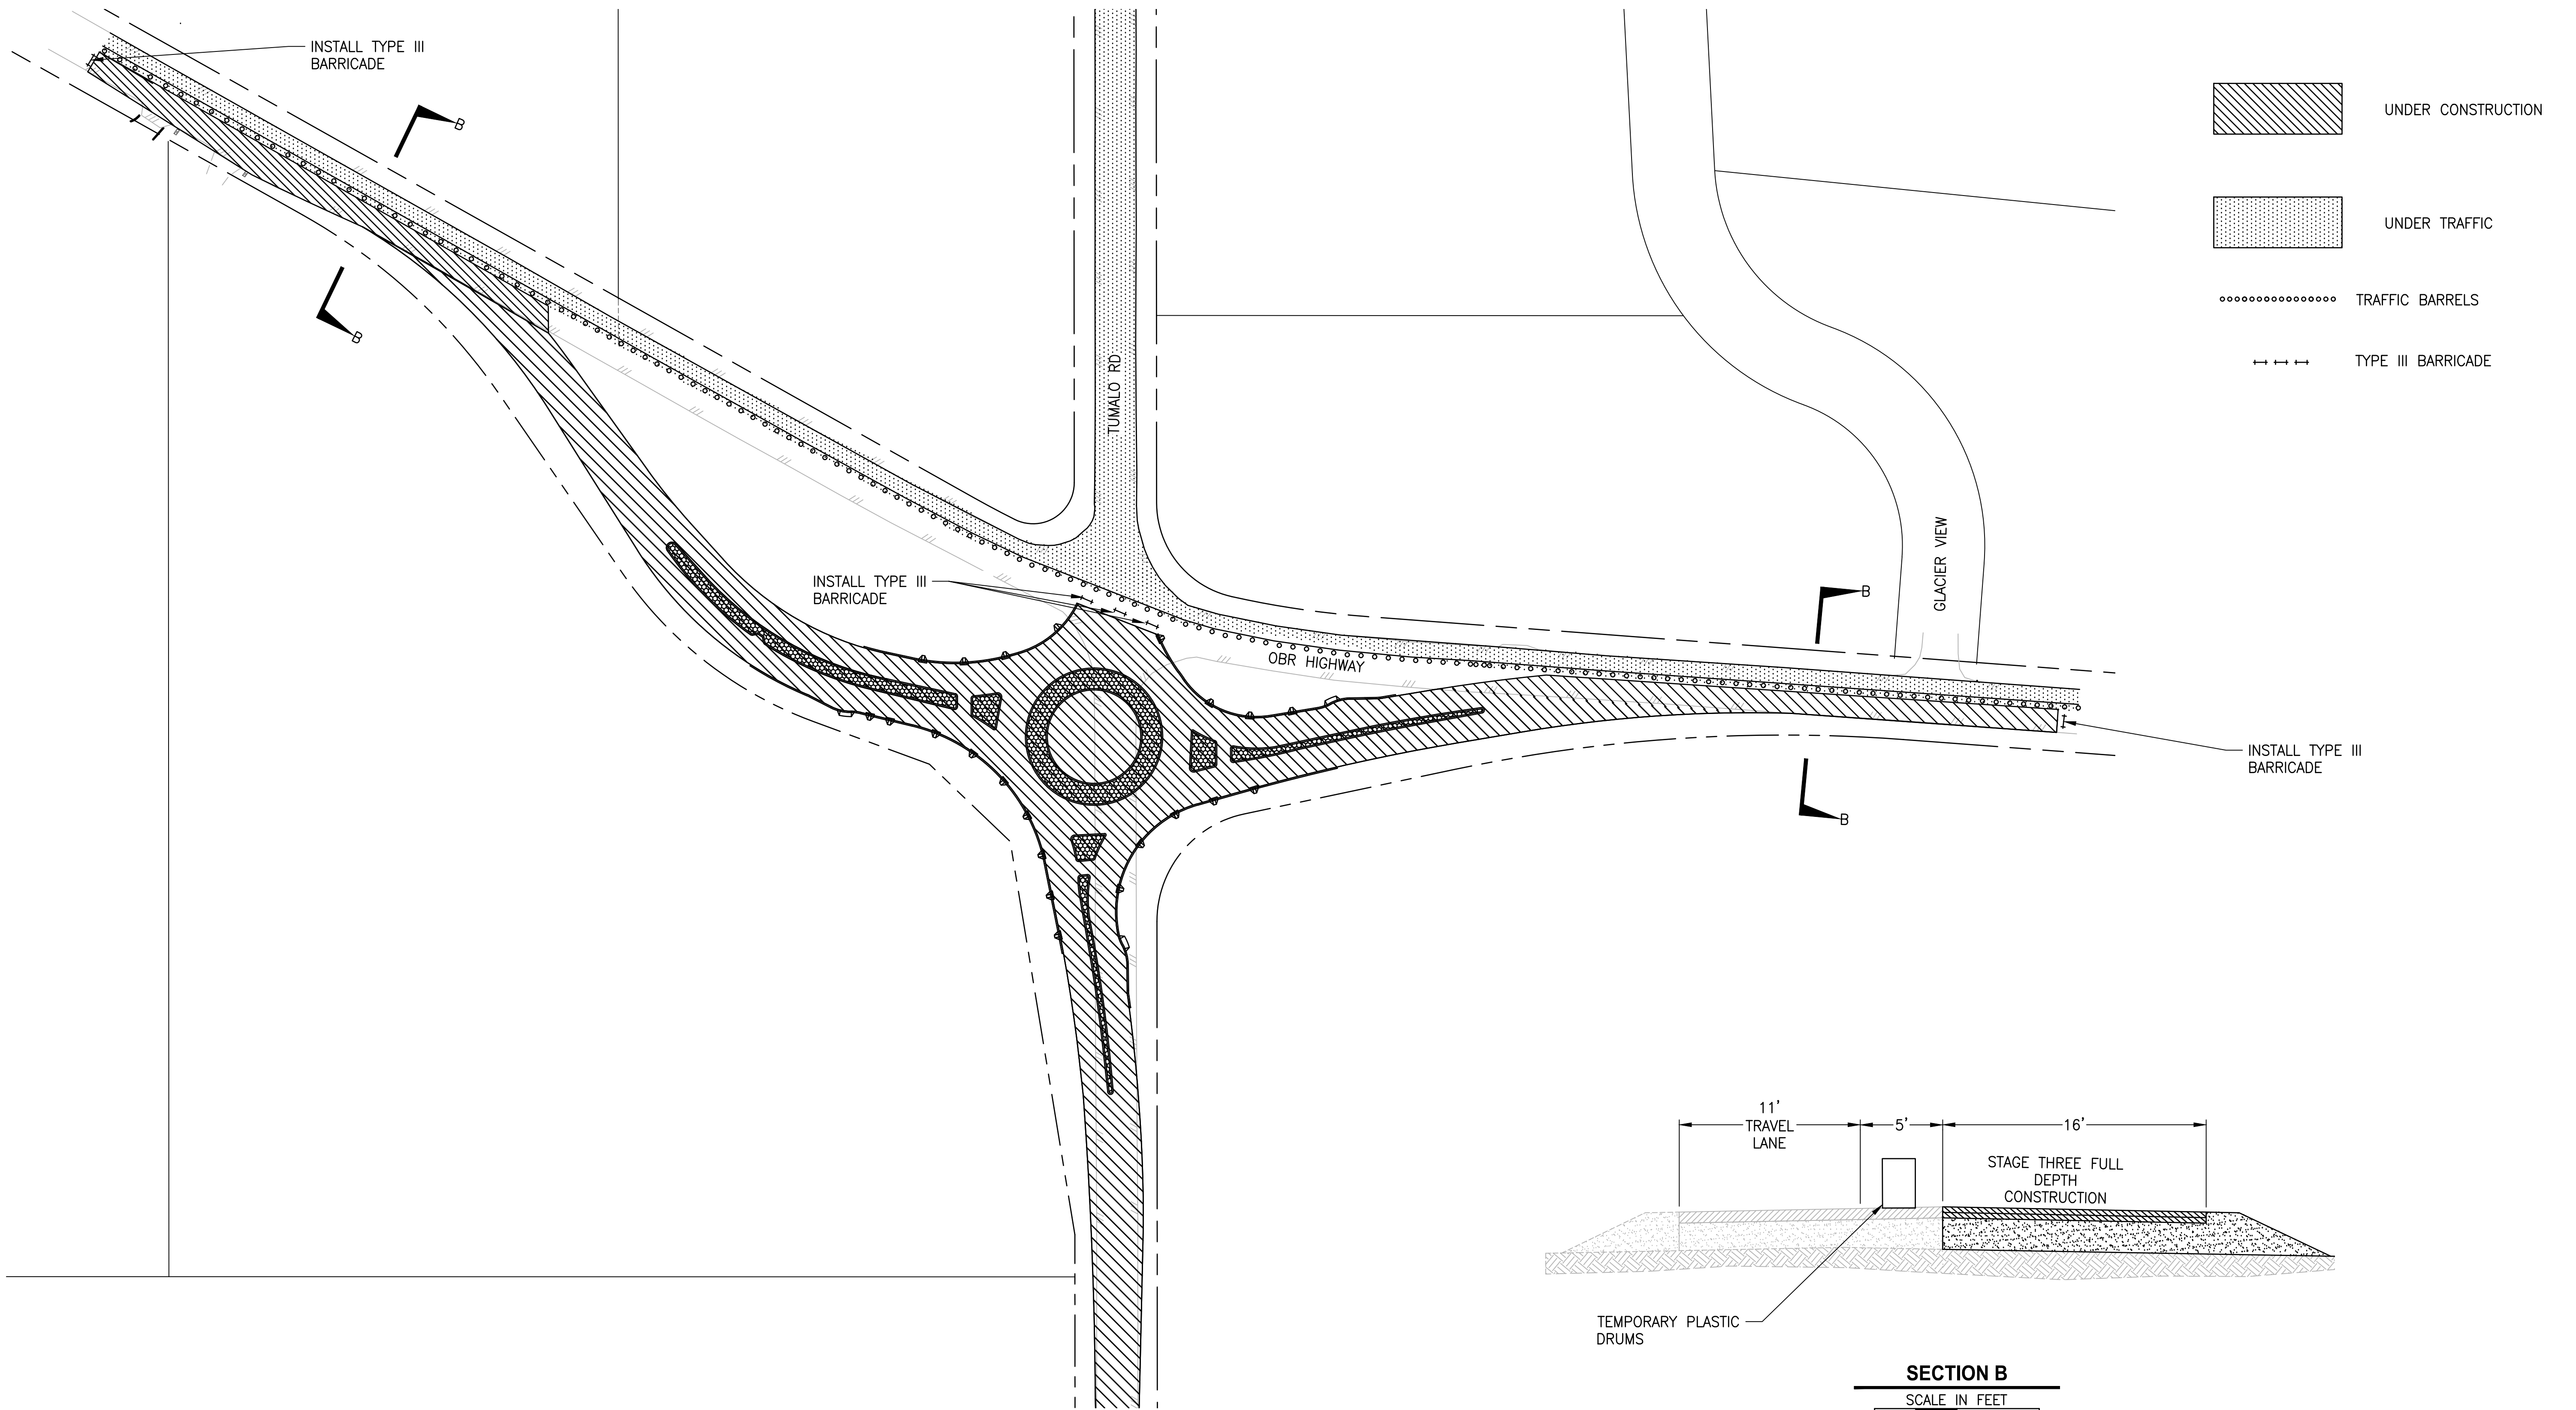

- UNDER CONSTRUCTION
- UNDER TRAFFIC
- TRAFFIC BARRELS
- TYPE III BARRICADE

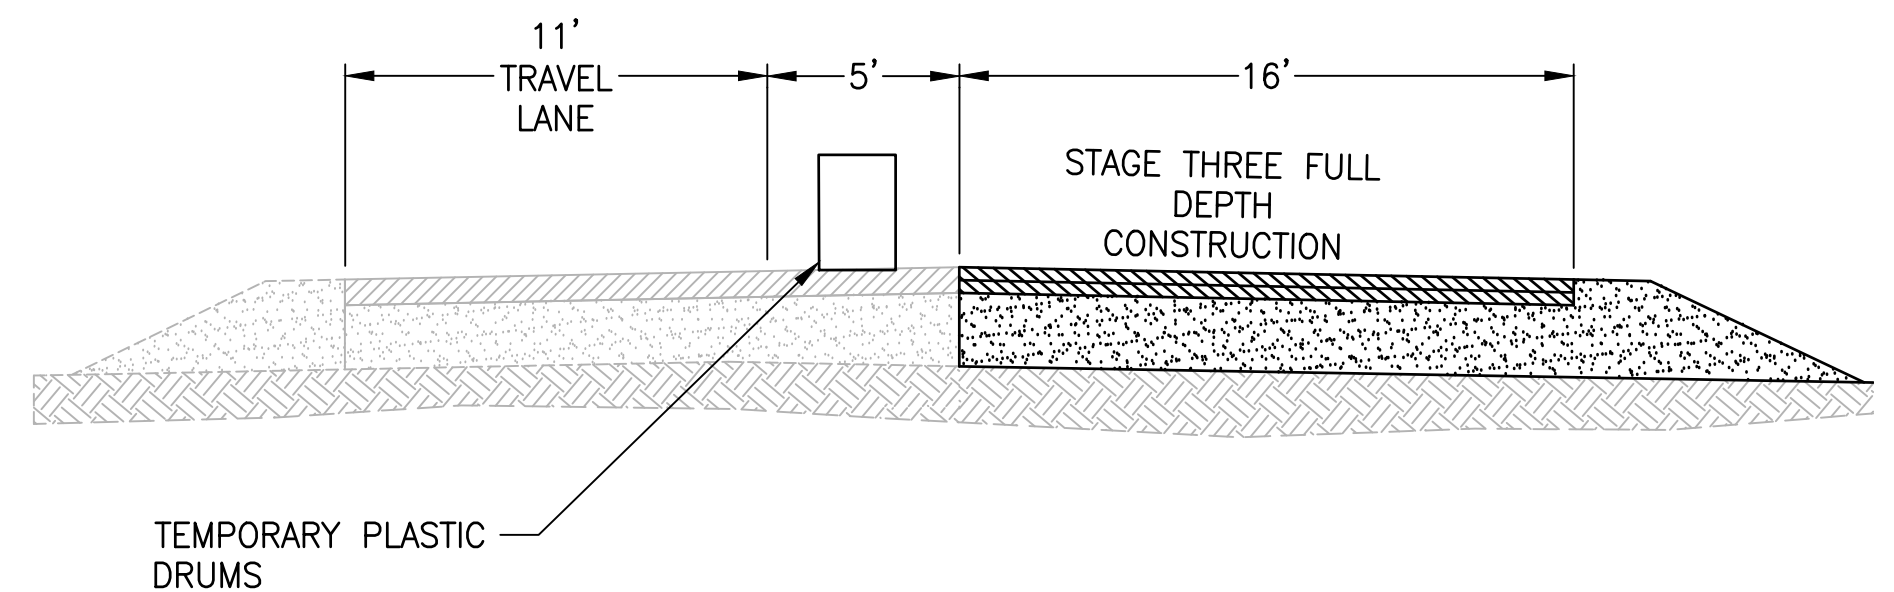


SECTION B
SCALE IN FEET
0 5 10'

STAGE THREE PLAN
SCALE IN FEET
0 60 120'

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | DR |
| | | | DRAWN |
| | | | DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

**ONE INCH AT FULL SCALE.
IF NOT, SCALE ACCORDINGLY**
 FILE NAME
 BE2509005-C7.9-ST00
 JOB No.
 297-2509-005
 DATE
 12/2019

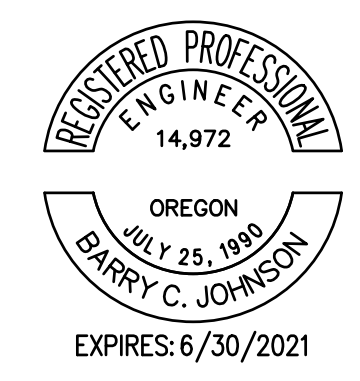


PROJECT NAME
**OLD BEND-REDMOND
HIGHWAY/ TUMALO RD
INTERSECTION IMPROVEMENTS**

**CONSTRUCTION
STAGING - STAGE THREE**

DRAWING NO.
 21 OF 43
C7.11

LAYOUT: C7.12 SITE A STAGE FOUR PATH: U:\Bend\Projects\Clients\2509-Deschutes County\297-2509-005 OBRH Design Phase\99Sves\CADD\DWG\TUMALO RD RBAs\CD'S PLOTTED BY: ricodcv DATE: Monday, April 27, 2020 11:14:24 AM

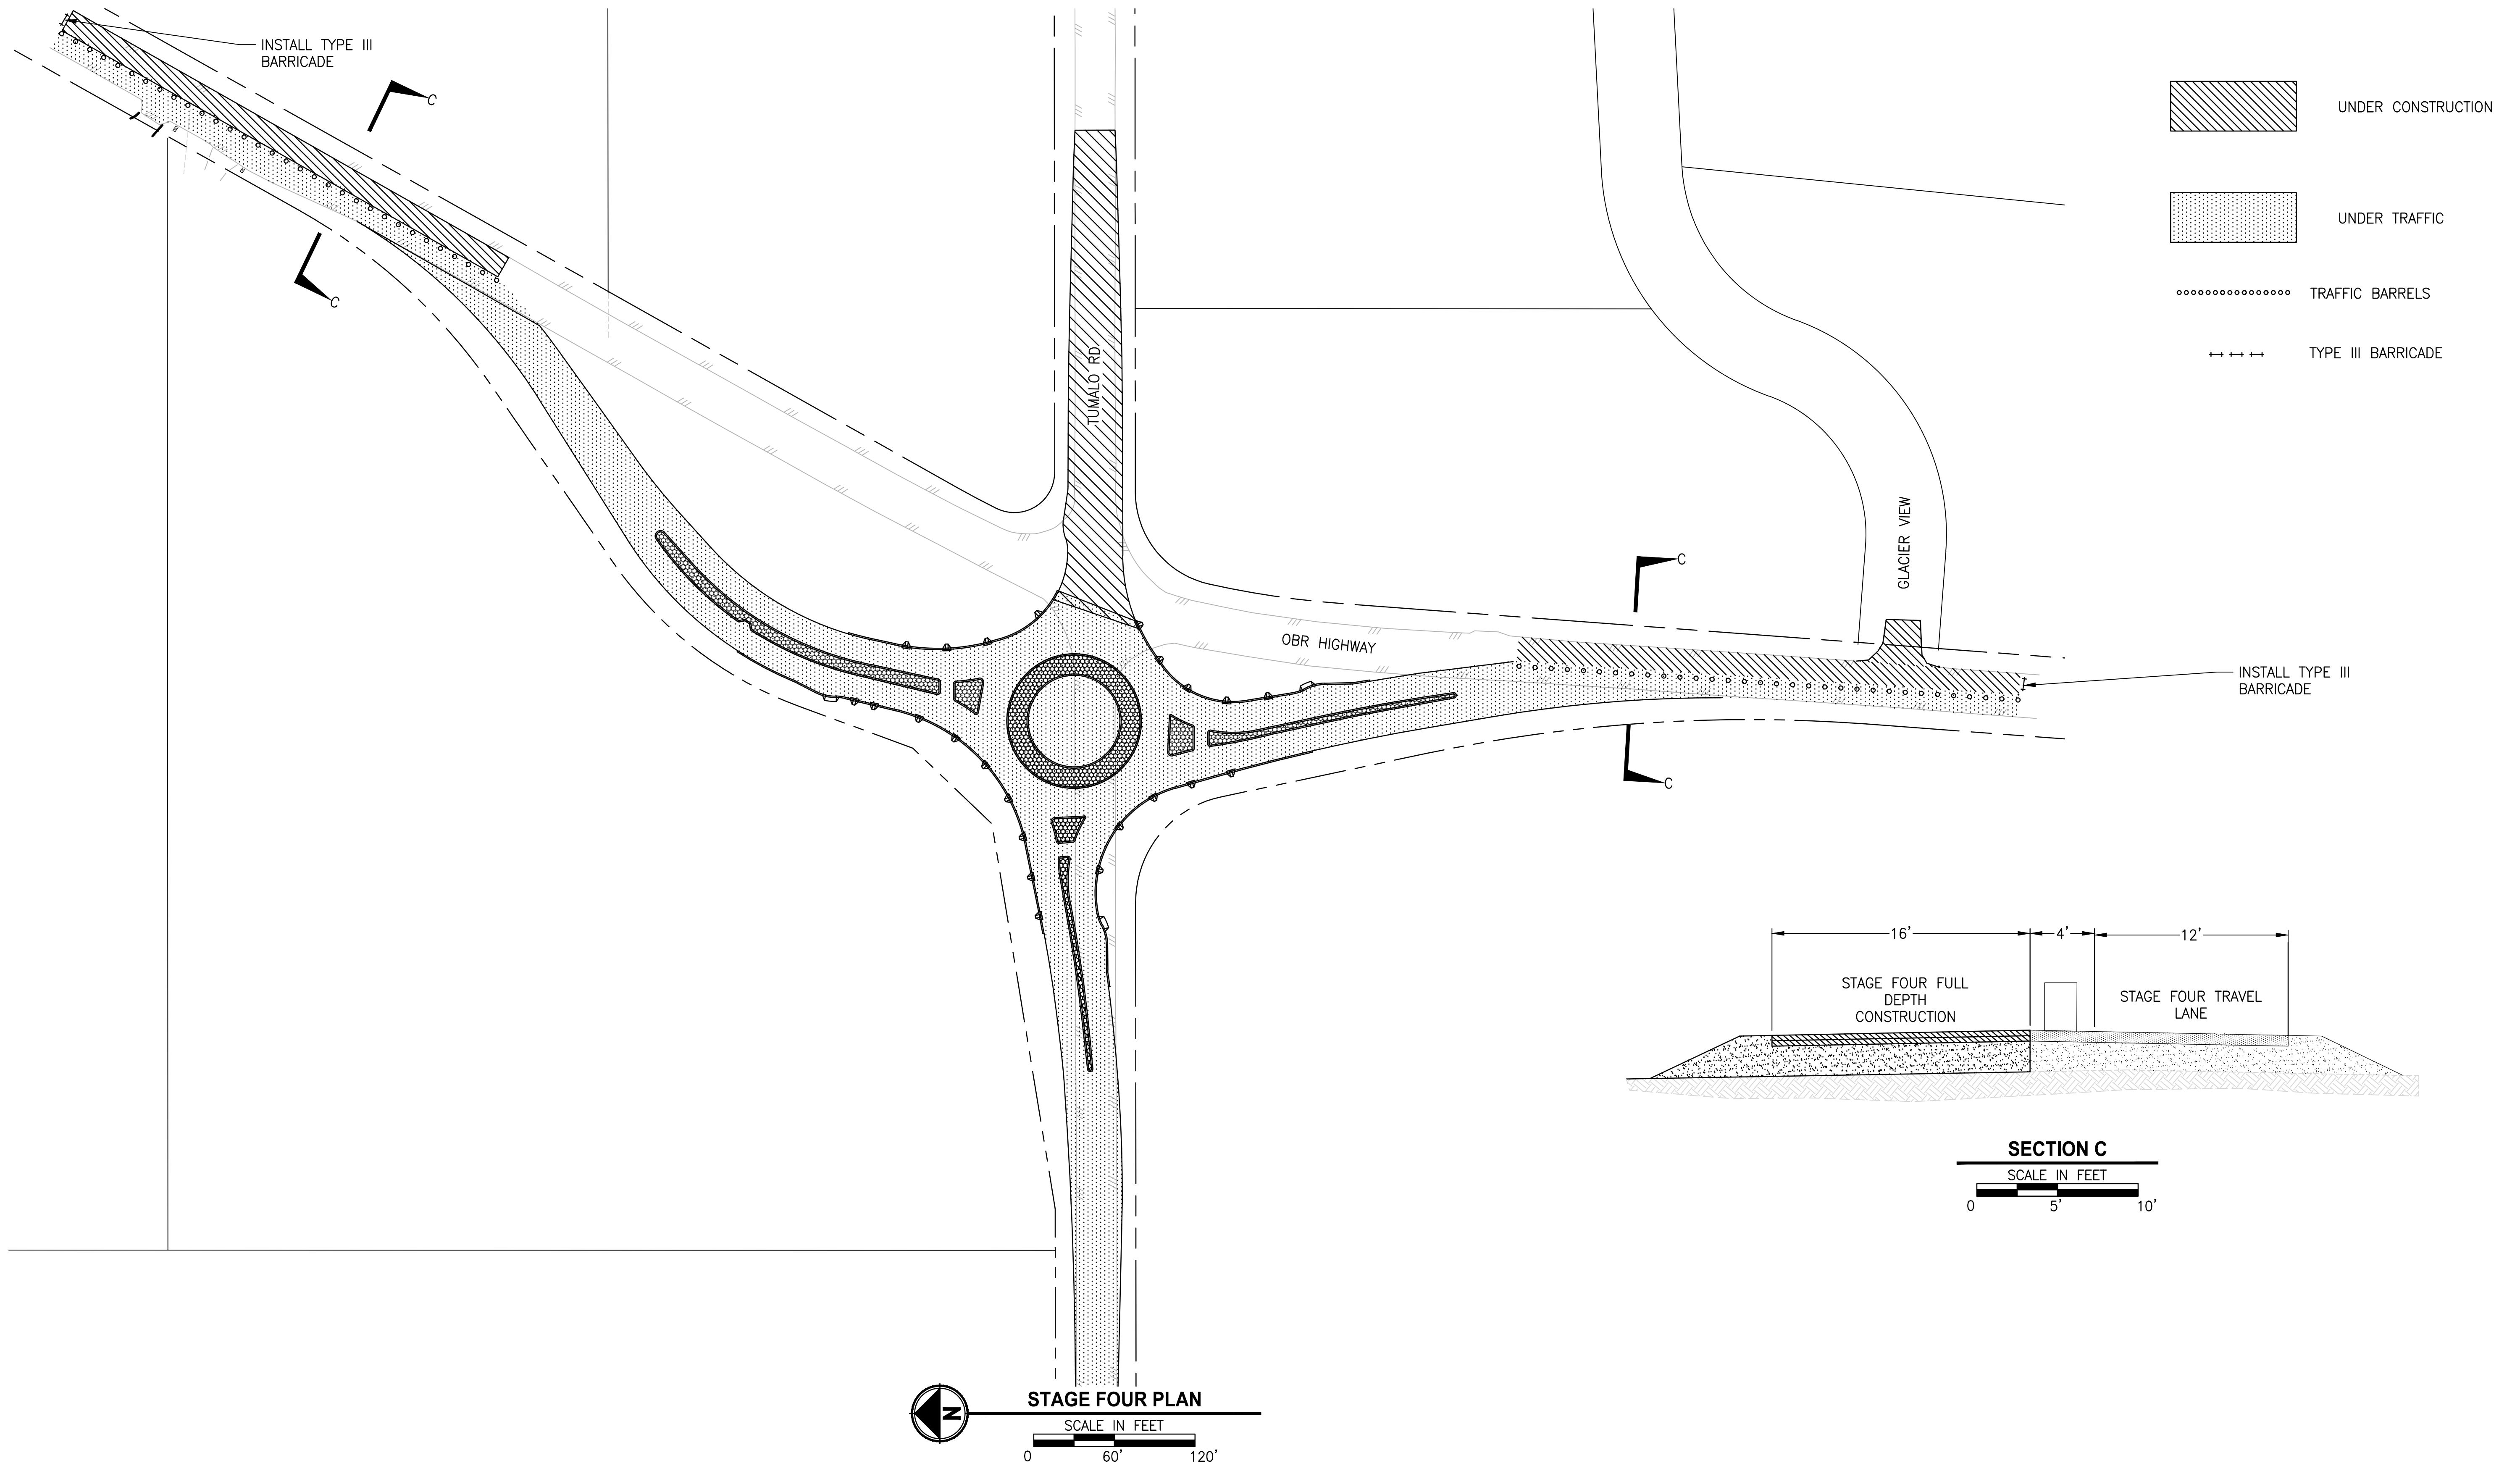


| REVISIONS | DATE | BY | DESIGNED DR |
|-----------|------|----|-------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY

FILE NAME
BE2509005-C7.9-ST00

JOB No.
297-2509-005

DATE
12/2019



PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS


FOR BIDDING REFERENCE ONLY



CONSTRUCTION STAGING - STAGE FOUR



DRAWING NO.
22 OF 43

C7.12

LAYOUT: C7.13 SITE A STAGE FIVE PATH: U:\Bend\Projects\Clients\2509-deschutes county\297-2509-005 obrh design phase\99Sves\CADD\DWG\tumalo rd rbas\CD'S PLOTTED BY: ricedev DATE: Friday, April 3, 2020 9:29:52 AM

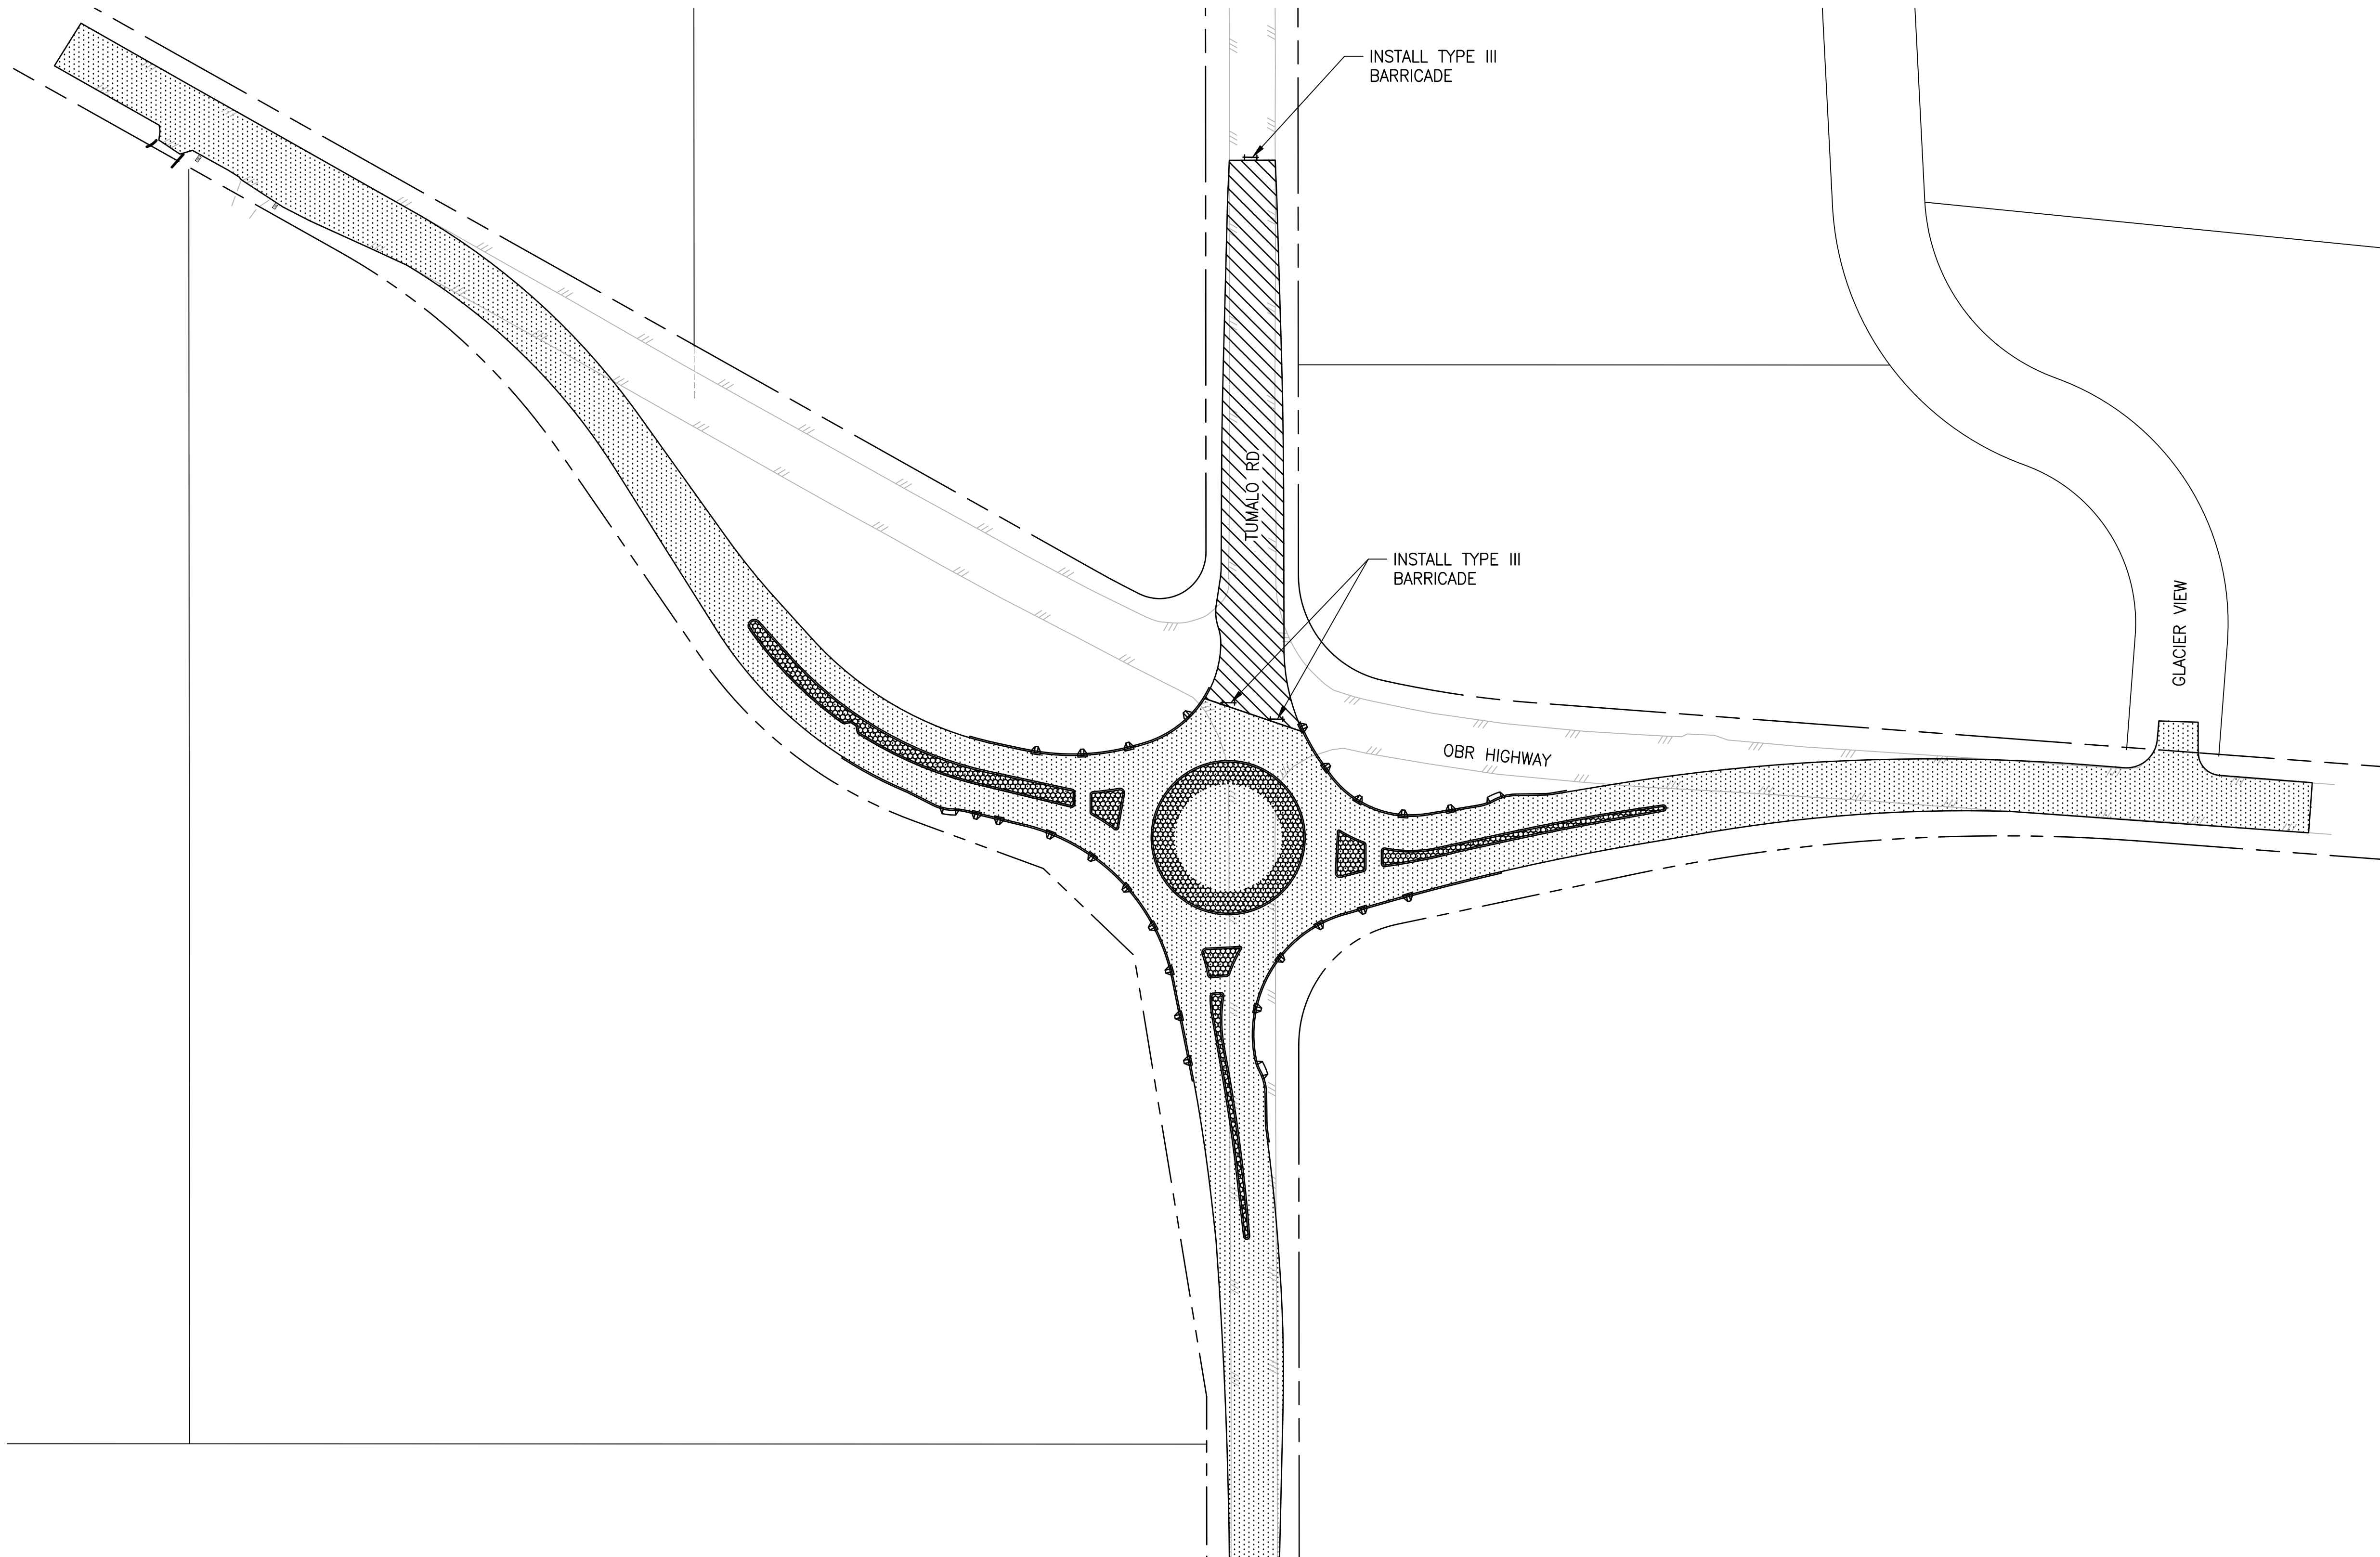

 UNDER CONSTRUCTION
 UNDER TRAFFIC

 **STAGE FIVE PLAN**
 SCALE IN FEET


FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | DR |
| | | | DRAWN |
| | | | DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

**ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY**
 FILE NAME
 BE2509005-C7.9-ST00
 JOB No.
 297-2509-005
 DATE
 12/2019




PROJECT NAME
**OLD BEND-REDMOND
 HIGHWAY/ TUMALO RD
 INTERSECTION IMPROVEMENTS**


**CONSTRUCTION
 STAGING - STAGE FIVE**

DRAWING NO.
 23 OF 43
C7.13

LAYOUT: EROSION CONTROL PLAN PATH: U:\Bend\Projects\Clients\2509-Deschutes County\297-2509-005 OBRH Design Phase\CADD\DWG\TUMALO RD\BEAs\CD'S PLOTTED BY: rcedev DATE: Friday, April 3, 2020 10:19:11 AM

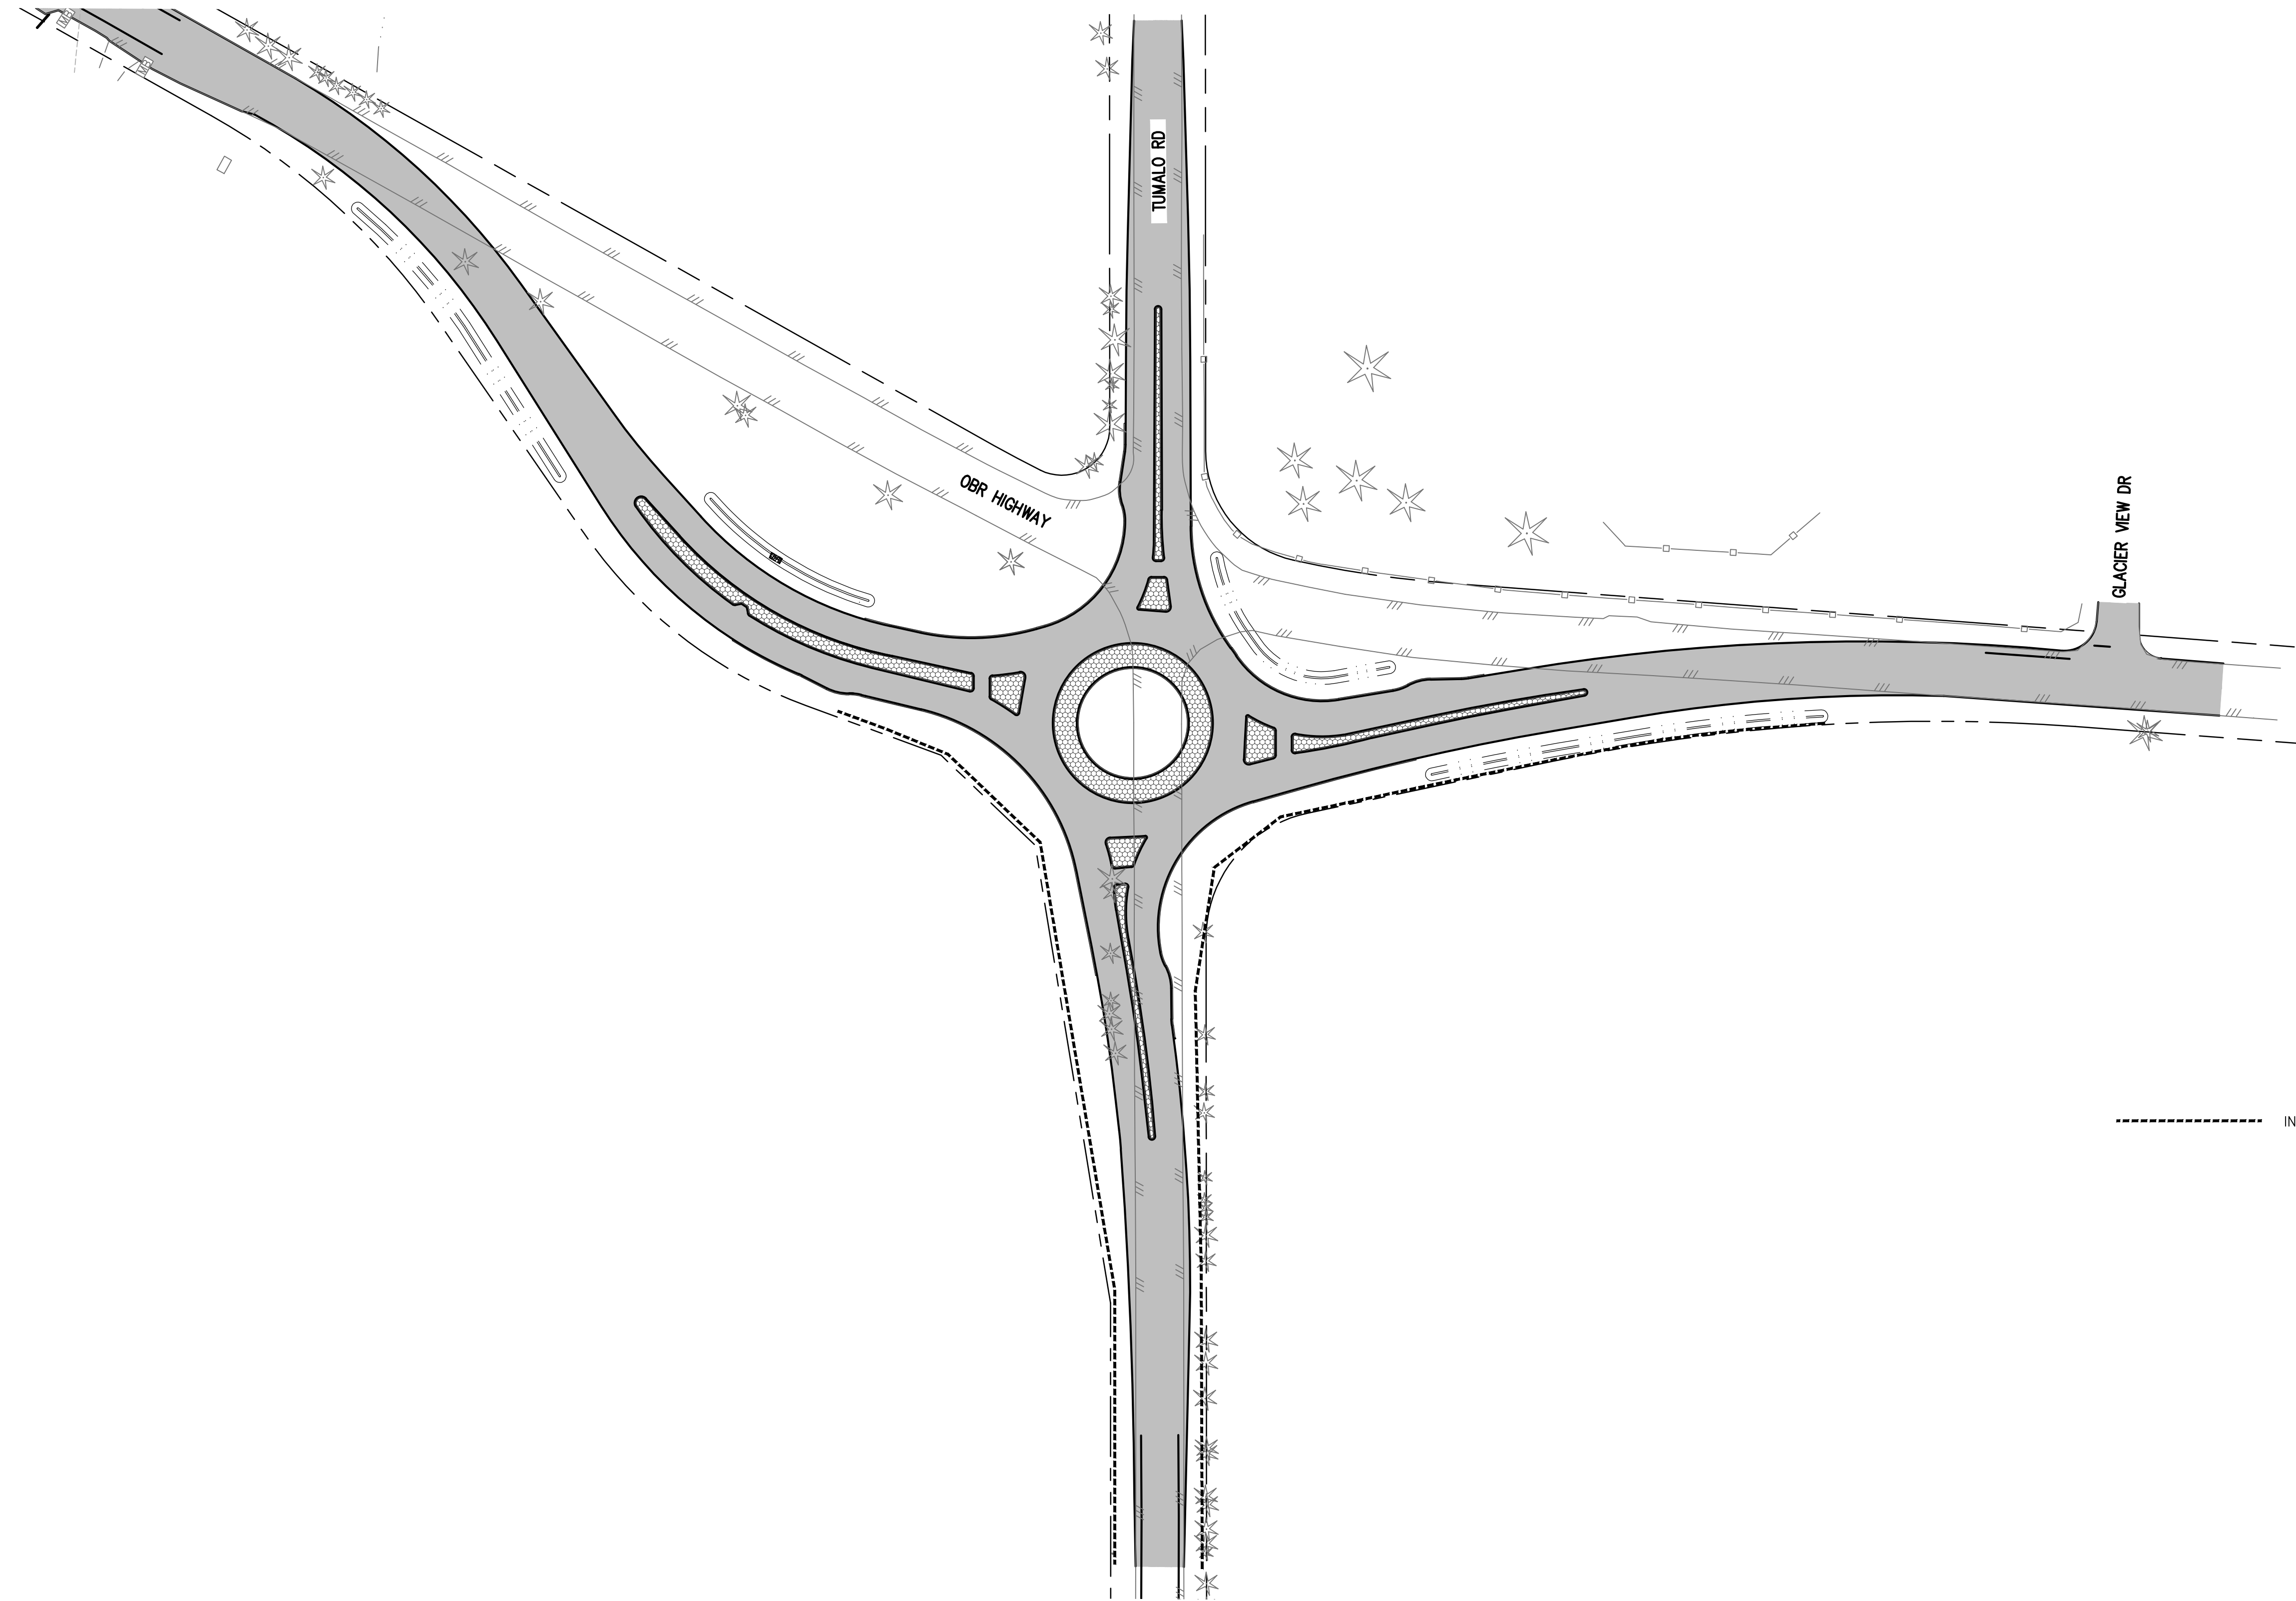


----- INSTALL SEDIMENT FENCE


EROSION CONTROL PLAN
 SCALE IN FEET
 0 60' 120'

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | DR |
| | | | DRAWN |
| | | | DR/LYF |
| | | | CHECKED |
| | | | APPROVED |

**ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY**
 FILE NAME
 BE2509005-C8.0-ER00
 JOB No.
 297-2509-005
 DATE
 12/2019



PROJECT NAME
**OLD BEND-REDMOND
 HIGHWAY/ TUMALO RD
 INTERSECTION IMPROVEMENTS**


FOR BIDDING REFERENCE ONLY

EROSION CONTROL PLAN




DRAWING NO.
 24 OF 43

C8.0




LAYOUT: LANDSCAPE PLAN
 PATH: U:\Bent\Projects\Clients\2509-Deschutes County\297-2509-005 OBRH Design Phase\995\cs\CADD\DWG\TUMALO RD RBAs\CD'S
 PLOTTED BY: ricedev DATE: Wednesday, April 29, 2020 1:16:27 PM

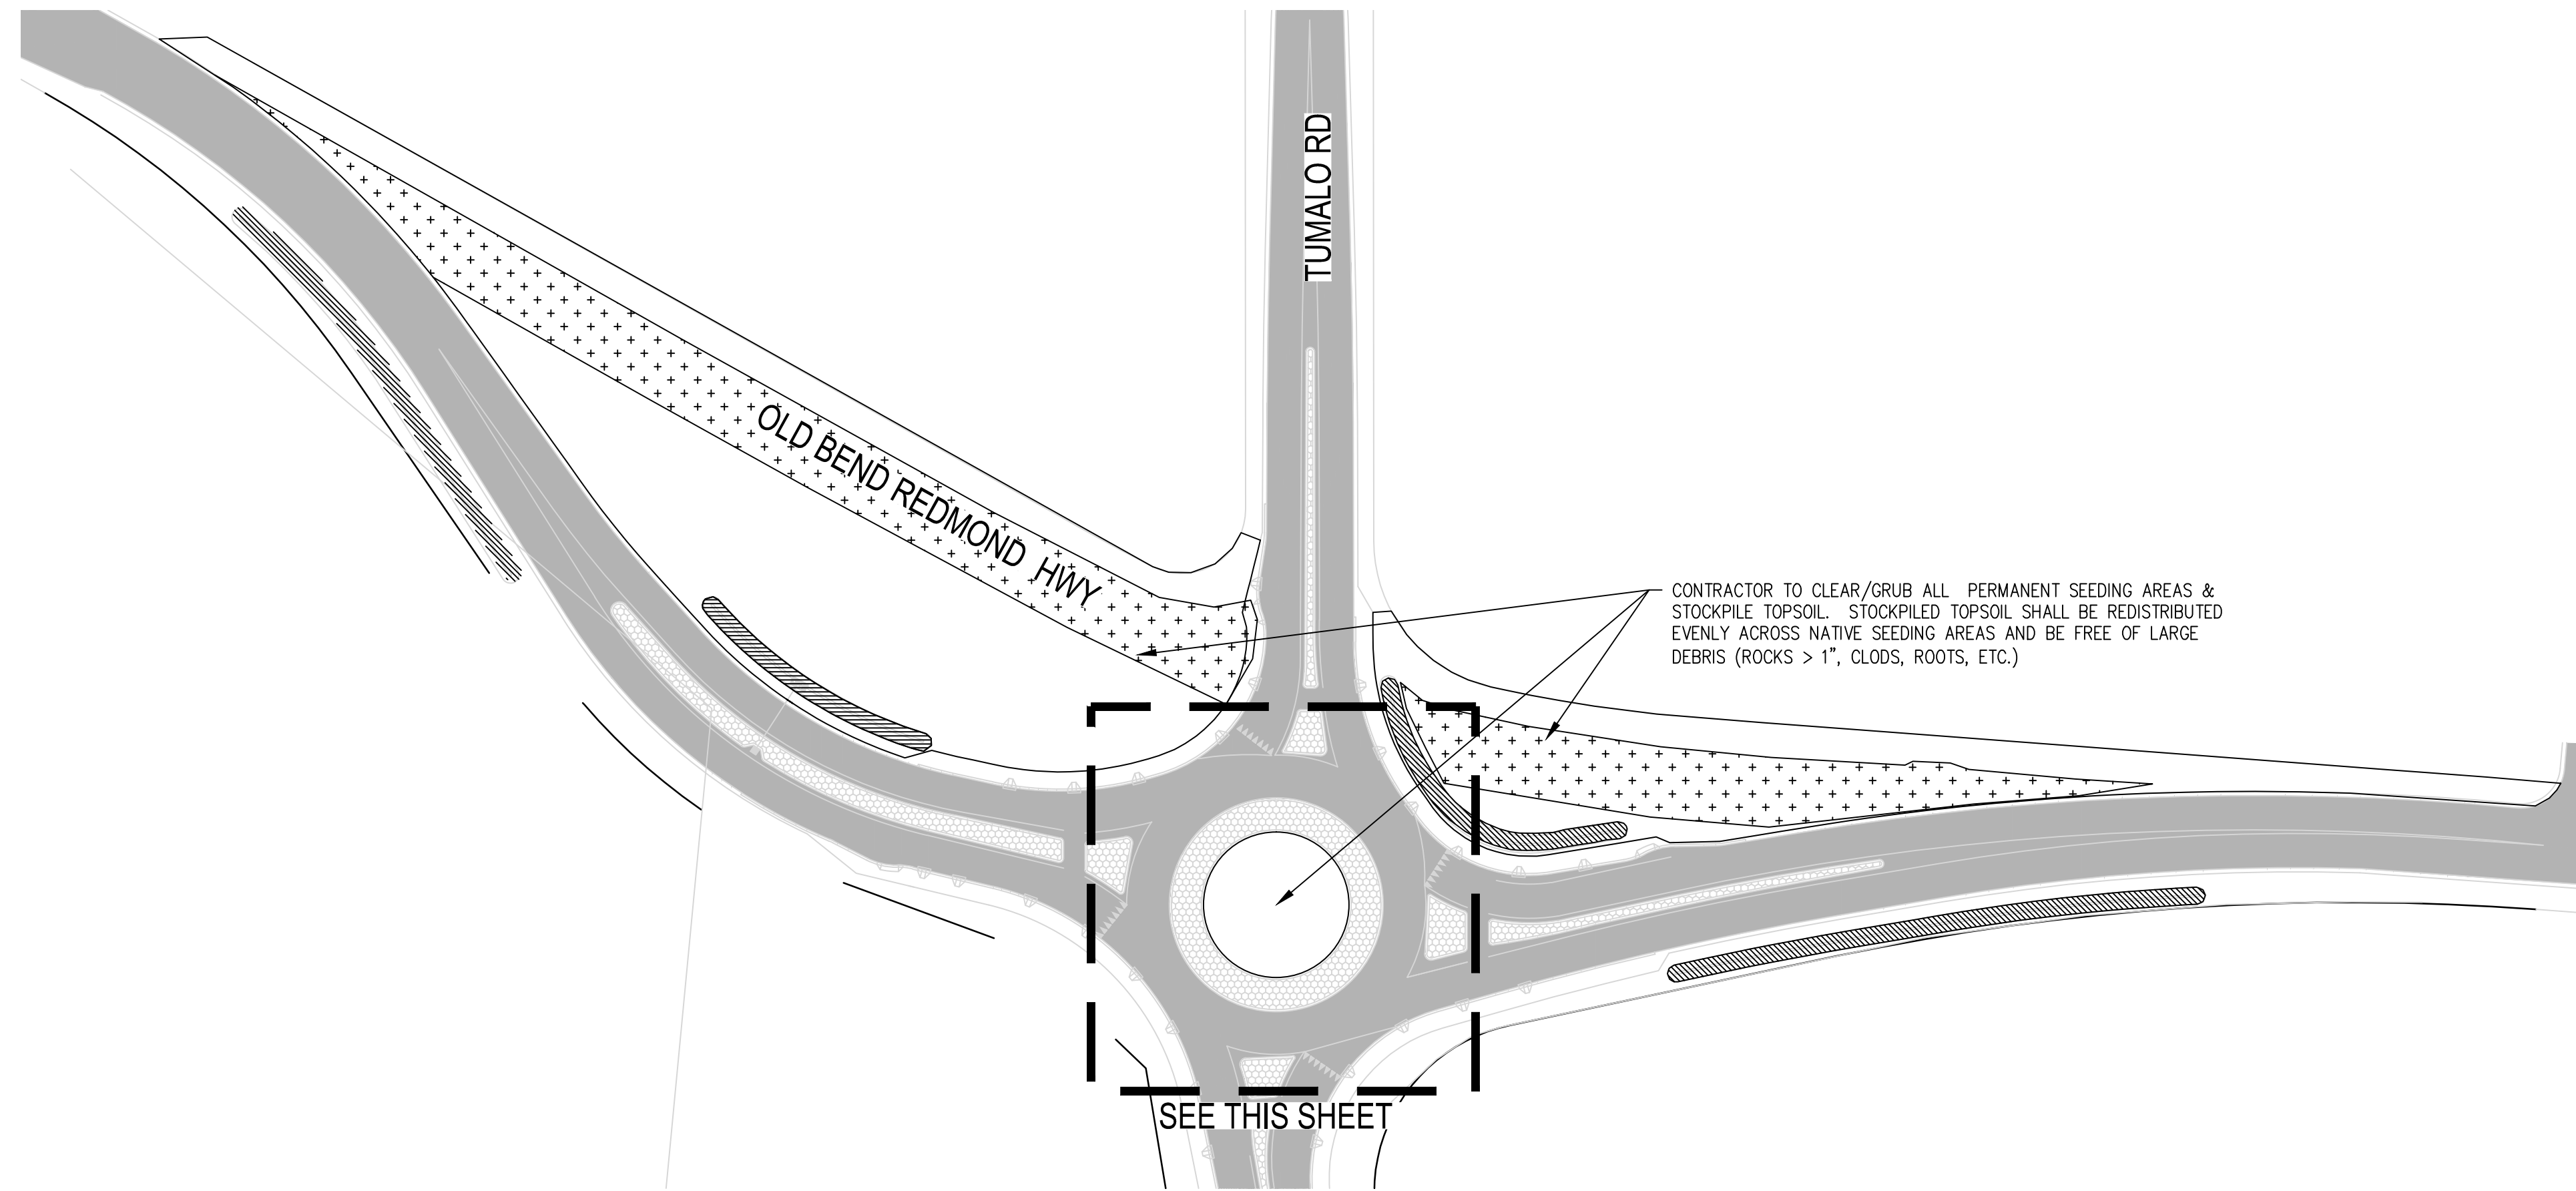

| PLANT SCHEDULE | | | | | |
|----------------|------|-----|---|-------------|----------|
| TREES | CODE | QTY | BOTANICAL / COMMON NAME | CAL. | |
| | JO | 3 | JUNIPERUS OCCIDENTALIS / WESTER JUNIPER | 6' HT / B&B | |
| SHRUBS | CODE | QTY | BOTANICAL / COMMON NAME | CONT | |
| | CK | 64 | CALAMAGROSTIS X ACUTIFLORA 'KARL FOERSTER' / FEATHER REED GRASS | #1 CONT | |
| | CV | 27 | CHRYSOTHAMNUS VISCIDIFLORUS / YELLOW RABBITBRUSH | #1 CONT | |
| | PA | 9 | PEROVSKIA ATRIPLICIFOLIA / RUSSIAN SAGE | #2 CONT | |
| | PP | 6 | PINUS MUGO 'PUMILIO' / MUGO PINE | #5 CONT | |
| GROUND COVERS | CODE | QTY | BOTANICAL / COMMON NAME | CONT | SPACING |
| | AL | 105 | ARTEMISIA ARBUSCULA / LITTLE SAGEBRUSH | #1 | 24" o.c. |

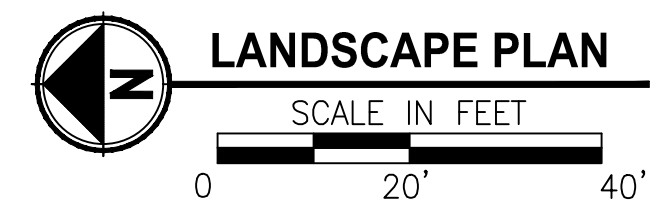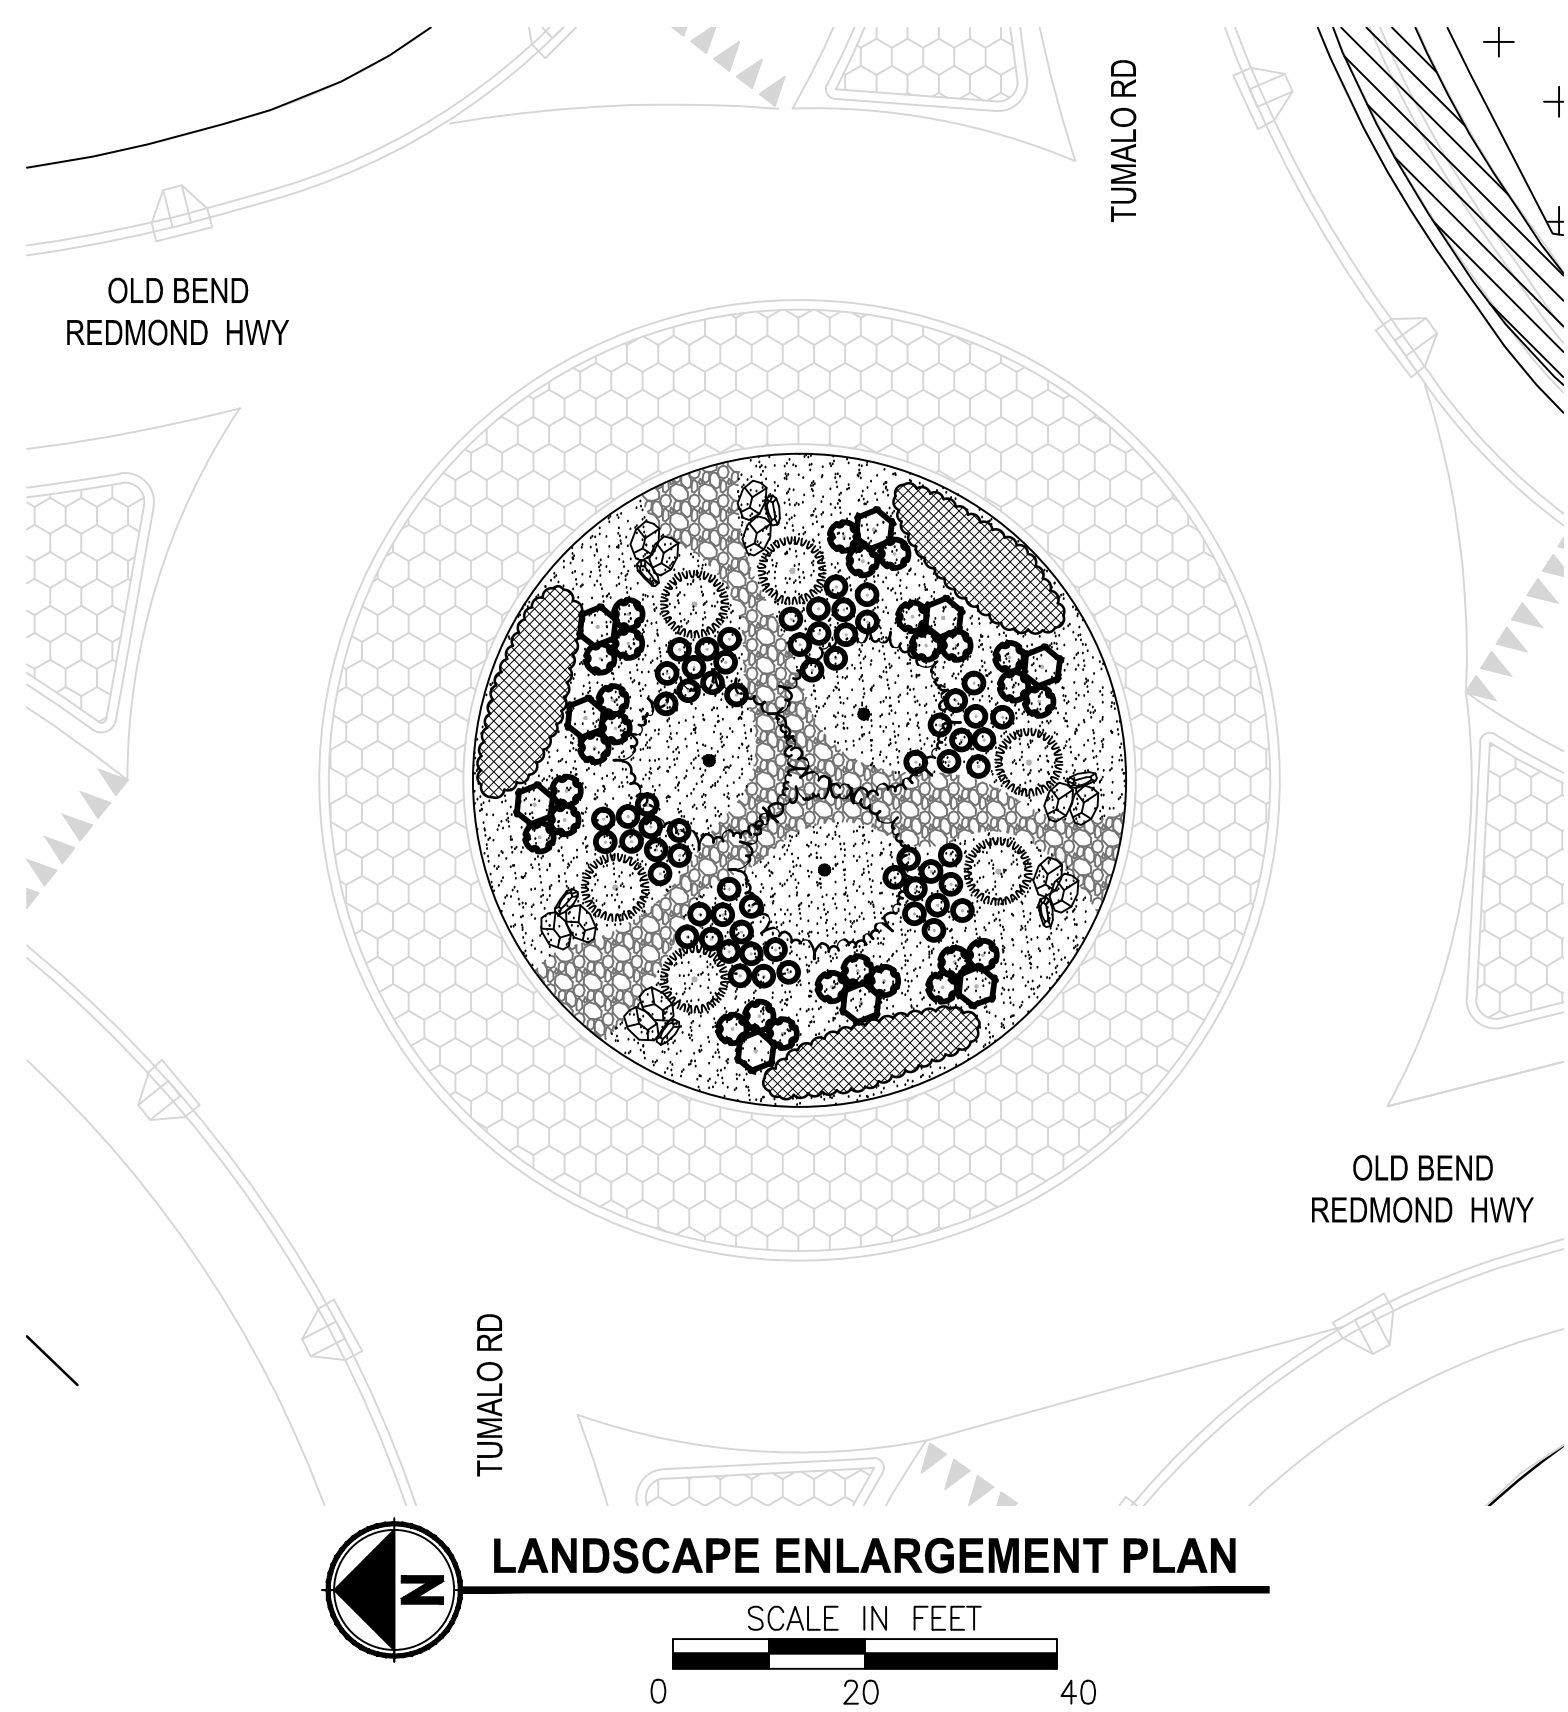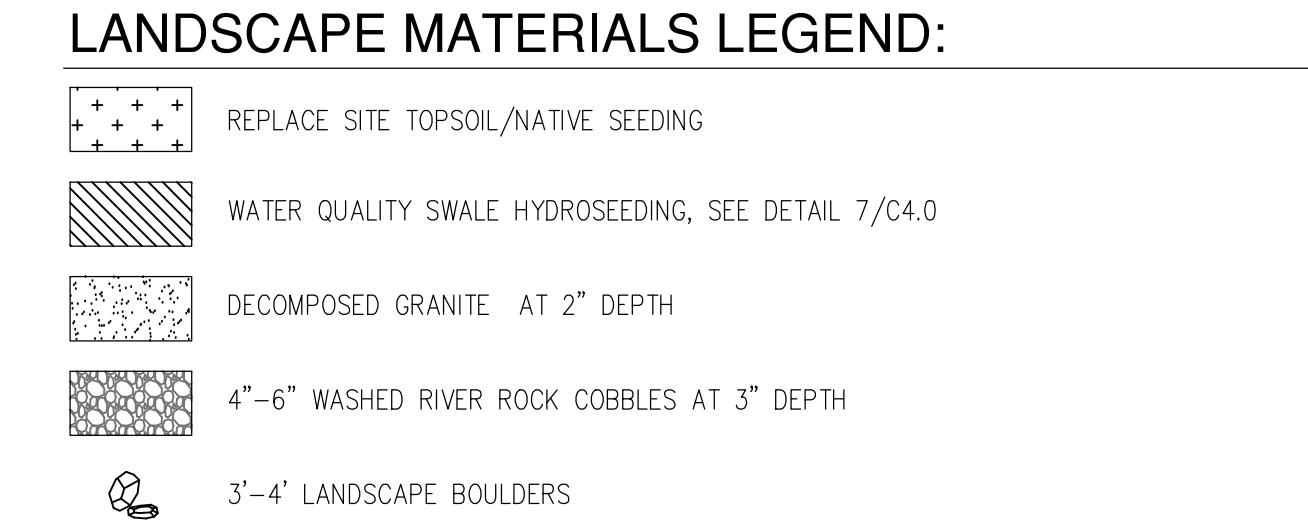

- ### GENERAL LANDSCAPE NOTES:
- LANDSCAPE MATERIALS & QUANTITIES SHALL BE FIELD ADJUSTED TO FIT ACTUAL FIELD CONDITIONS IF NECESSARY. COORDINATE LANDSCAPE CONSTRUCTION & REVIEWS WITH DESCHUTES COUNTY.
 - CONTRACTOR SHALL APPLY PERMENNIT SEEDING TO ALL THE DISTURBED AREAS WITHIN THE PROJECT AREA EXCEPT AREAS OTHERWISE SHOWN ON PLANS.

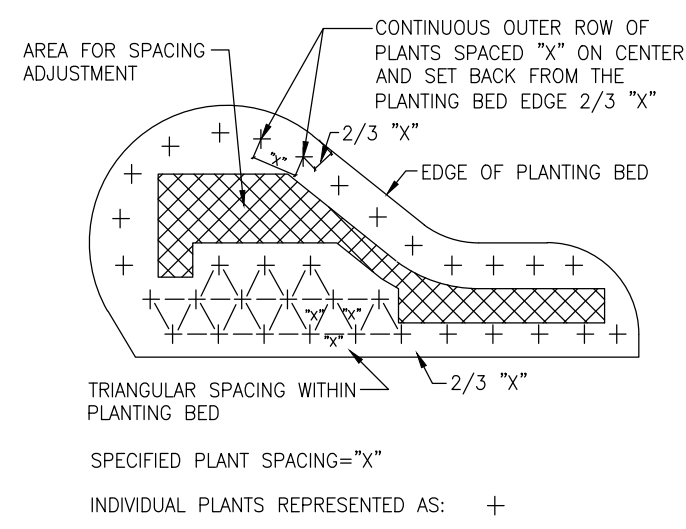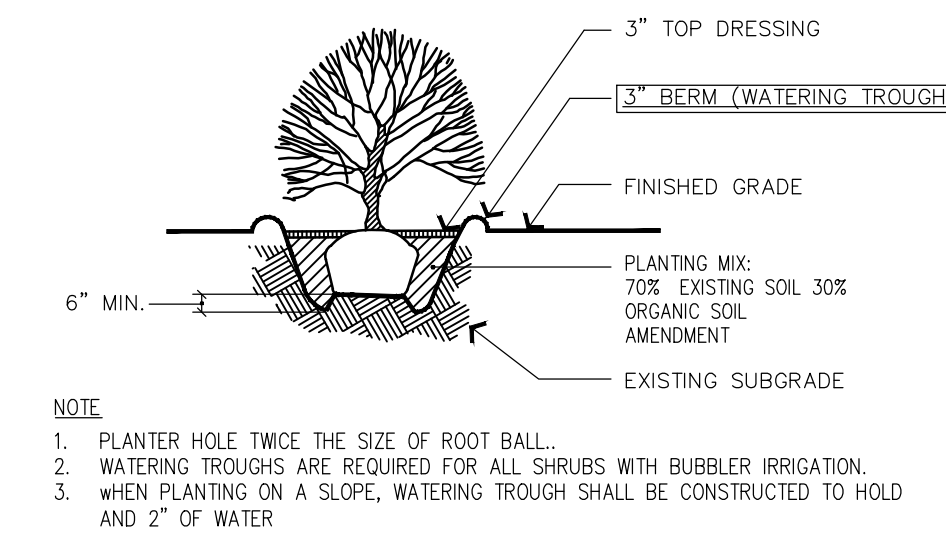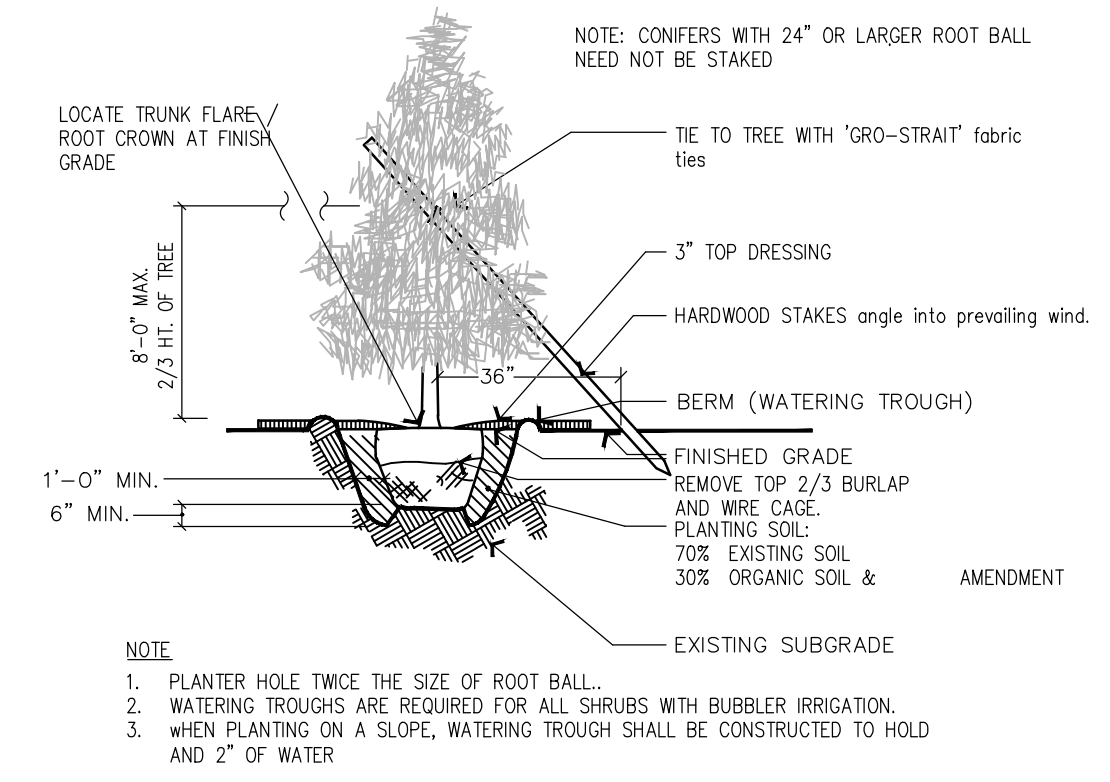

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED DR |
|-----------|------|----|-------------|
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY.
 FILE NAME: BE2509005-L1.0-PL00
 JOB No: 297-2509-005
 DATE: 12/2019










PROJECT NAME
OLD BEND-REDMOND HIGHWAY/ TUMALO RD INTERSECTION IMPROVEMENTS

LANDSCAPE PLAN

DRAWING NO.
 25 OF 43
L1.0

SIGNING AND STRIPING LEGEND
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS







S I G N I N G L E G E N D

-  Install new sign (N) on new (M) sign support.
-  Install new sign (N)
-  Maintain and protect existing sign (N) and (M) sign support.
-  Remove existing sign (N) and (M) sign support.
-  Remove and save existing sign (N) and remove (M) sign support.
-  Reinstall existing sign (N) on new (M) sign support.
-  Remove existing sign (N).

A B B R E V I A T I O N S

- N = Sign Number
 M = Material
 Material options:
 W = Wood Post
 ST = Perforated Steel Square Tube Sign Support

S T R I P I N G L E G E N D

-  Inst. 4" yellow line
-  Inst. 8" white line
-  Inst. 8" white dotted line
-  Inst. 1' white stop bar
-  Inst. narrow double no-pass two 4" yellow lines
-  Inst. yield line (white)


G E N E R A L N O T E S

1. All signage and pavement marking shall conform to the requirements and specifications of the Manual on Uniform Traffic Control Devices (M.U.T.C.D.) latest edition, the Oregon supplement to the M.U.T.C.D., the Oregon Standard Specifications for Construction, and the project special provisions.
2. All pre-markings for pavement markings and striping, as well as signs locations shall be approved by the Engineer prior to final placement.
3. All longitudinal pavement markings shall be "Method AB: Thermoplastic, Extruded or Sprayed, Surface, Non-Profiled".
4. All transverse bars and legends shall be type "AB Thermoplastic".
5. All signs and sign supports removed from the project shall be salvaged to Deschutes County.
6. Preserve and protect all existing striping outside of the project limits.

| REVISIONS | DATE | BY | DESIGNED LTN | DRAWN LTN | CHECKED HJS | APPROVED SGB |
|-----------|------|----|-----------------|--------------|----------------|-----------------|
| | | | | | | |
| | | | | | | |

**ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY**

FILE NAME
 JOB No.
 DATE



PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
 INTERSECTION IMPROVEMENTS**
 DESCHUTES COUNTY

FOR BIDDING REFERENCE ONLY


SIGNING AND STRIPING LEGEND

DRAWING NO.
 26 OF 43
SS1

EXISTING SIGN DETAILS
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS




Sign 1

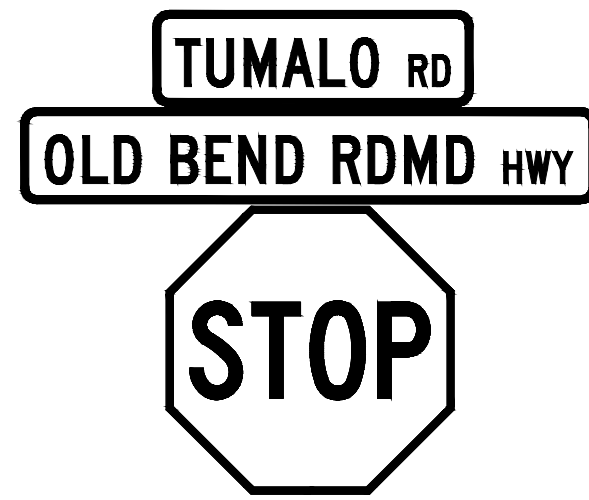


Sign 2



Sign 3



Sign 4

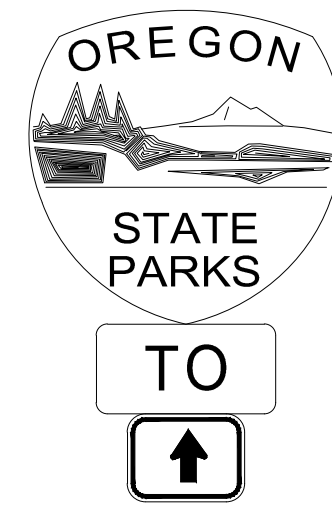

5a


TO

5b




5c

Sign 5




Sign 6

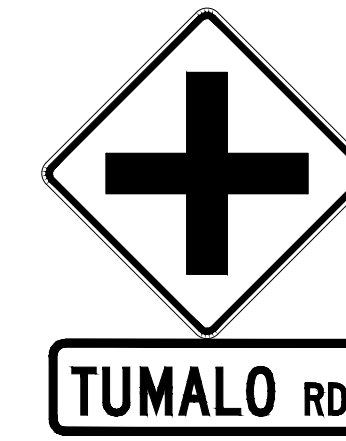


TUMALO RD

Sign 7

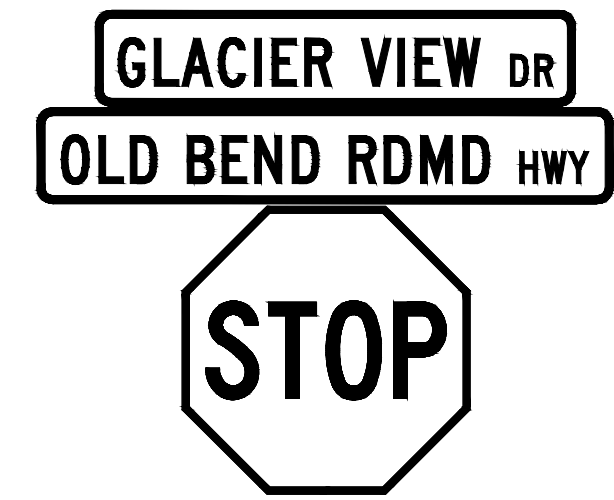

GLACIER VIEW DR
 OLD BEND RDMD HWY



Sign 8




Sign 9




Sign 10



Sign 11

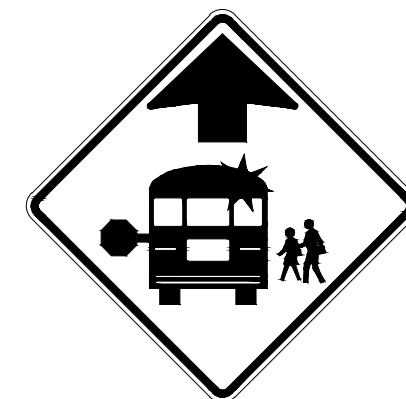

Sign 12

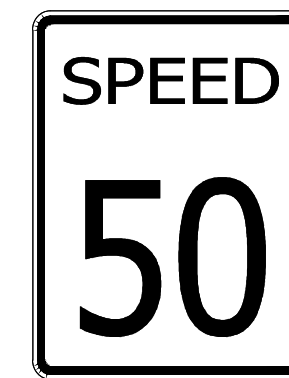


Sign 13

| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | DRAWN LTN |
| | | | CHECKED HJS |
| | | | APPROVED SGB |

ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY

FILE NAME
 JOB No.
 DATE

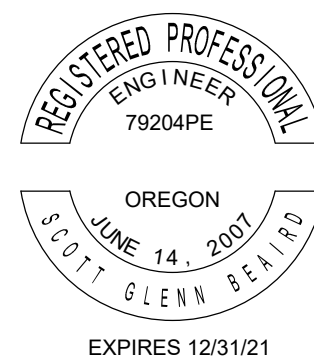

PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
 INTERSECTION IMPROVEMENTS**
 DESCHUTES COUNTY

FOR BIDDING REFERENCE ONLY


EXISTING SIGN DETAILS

DRAWING NO.
 27 OF 43
SS2


PROPOSED SIGN DETAILS
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS



Sign 101



Sign 102

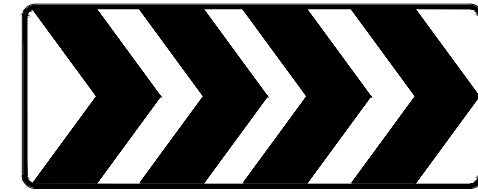


Sign 103



Sign 104

105a

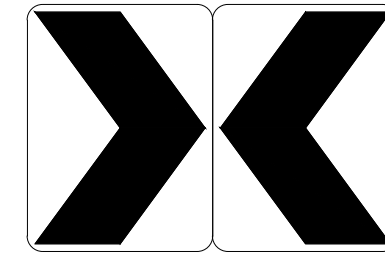


105b


Sign 105



Sign 106

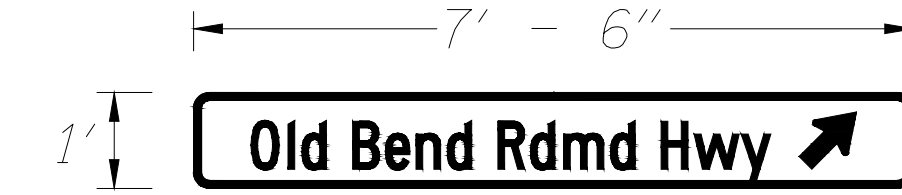

Sign 107

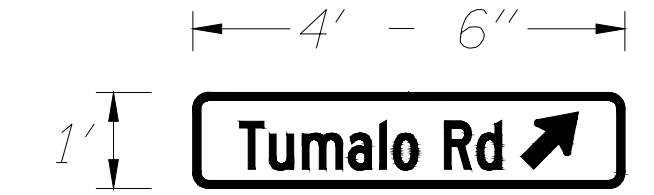


Sign 108



Sign 109




Sign 110



Sign 111



Sign 112

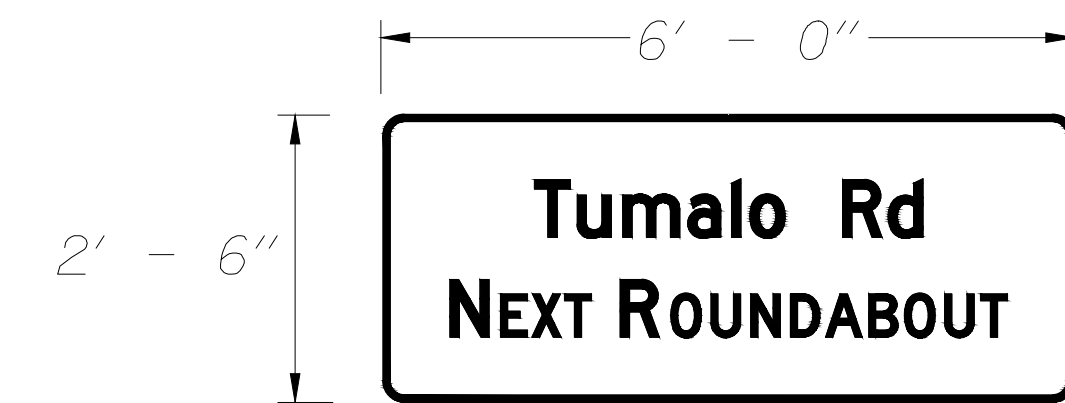


Sign 113

| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | DRAWN LTN |
| | | | CHECKED HJS |
| | | | APPROVED SGB |

ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY

FILE NAME
 JOB No.
 DATE



PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
 INTERSECTION IMPROVEMENTS**
 DESCHUTES COUNTY

FOR BIDDING REFERENCE ONLY

PROPOSED SIGN DETAILS

DRAWING NO.
 28 OF 43
 SS3

SIGN & POST DATA TABLE
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS

| SIGN NO. | SIGN LOCATION ^{4/} | SIGN DIMENSIONS | | SUB-STRATE | COLOR ^{1/} | | | | | | SIGN NO. ^{2/} | TYPE OF SUPPORT | | | | | | | | | | | | | | | | POST | | FOOTING | | REMARKS | | | | | | | | | | | | | |
|----------|-----------------------------|-----------------|---------|------------|---------------------|--------|--|--|--|----|------------------------|-----------------|--------------------------------|--|-----------------------------------|---------|---|-------------------------------------|---------------------------|-----------------------------|--------------------------------|--------------------------------------|--|---------------------------------------|----------------------------|------------------------------------|-------------------------------------|--|-------------------------|--------------------------------|------|---------|--------|------------------------|--------------------------|-----------------|----|-----------------------|--|-----------------|-----------------|-------------|-------------|----------------------|----------------------|
| | | WIDTH | HEIGHT | | BACKGROUND | LEGEND | | | | | | LEGEND | WOOD POST (TM670-TM671, TM676) | SQ. TUBE SIGN SUPPORT (TM671, TM676, TM681, TM687-TM689) | TRIANGULAR BASE BREAKAWAY (TM602) | H-FRAME | MULTI-POST BREAKAWAY (TM220, TM600-TM601) | STAINLESS STEEL CLAMP (SSC) (TM677) | SIGNAL POLE MOUNT (TM680) | MAST ARM SIGN MOUNT (TM679) | BRIDGE STRUCTURE MOUNT (TM677) | CANTILEVER / BUTTERFLY (TM622-TM627) | SIGN BRIDGE (TM606-TM612, TM614-TM620) | EXIT NUMBER SIGN MOUNT (TM220, TM225) | ROUTE MARKER FRAME (TM678) | MILEPOST MARKER POST (TM221-TM222) | CROSSWALK CLOSURE BARRICADE (TM480) | VERTICAL SIGN MOUNTS ON EXISTING STRUCTURE | CUSTOM VARIABLE SUPPORT | SECONDARY SIGN (TM676 & TM678) | SIZE | | LENGTH | LOCATION ^{3/} | MIN. DEPTH ^{5/} | | | | | | | | | | |
| 106 | 102+77.46 | 12" | 36" | X | | Y | | | | BK | X | 106 | X | | | | | | | | | | | | | | | | | | | | | | | 2" - 12 ga. | 7' | CL | 3' - 3 1/2" | Slip Base | | | | | |
| 106 | 107+94.16 | 12" | 36" | X | | Y | | | | BK | X | 106 | X | | | | | | | | | | | | | | | | | | | | | | | 2" - 12 ga. | 7' | CL | 3' - 3 1/2" | Slip Base | | | | | |
| 106 | 206+05.74 | 12" | 36" | X | | Y | | | | BK | X | 106 | X | | | | | | | | | | | | | | | | | | | | | | | 2" - 12 ga. | 7' | CL | 3' - 3 1/2" | Slip Base | | | | | |
| 106 | 212+34.98 | 12" | 36" | X | | Y | | | | BK | X | 106 | X | | | | | | | | | | | | | | | | | | | | | | | 2" - 12 ga. | 7' | CL | 3' - 3 1/2" | Slip Base | | | | | |
| 107 | 208+74.37 | 7' - 6" | 1' - 0" | | X | G | | | | | | 107 | X | | | | | | | | | | | | | | | | | | | | | | | 2 1/2" - 12 ga. | 8' | 6.6' LT | 3' - 3 1/2" | Slip Base | | | | | |
| 107 | 210+27.65 | 7' - 6" | 1' - 0" | | X | G | | | | | | 107 | X | | | | | | | | | | | | | | | | | | | | | | | 2 1/2" - 12 ga. | 8' | 7.6' RT | 3' - 3 1/2" | Slip Base | | | | | |
| 108 | 104+58.65 | 4' - 6" | 1' - 0" | X | | G | | | | | X | 108 | X | | | | | | | | | | | | | | | | | | | | | | | 2" - 12 ga. | 8' | 4.8' RT | 3' - 3 1/2" | Slip Base | | | | | |
| 108 | 106+12.81 | 4' - 6" | 1' - 0" | X | | G | | | | | X | 108 | X | | | | | | | | | | | | | | | | | | | | | | | 2" - 12 ga. | 8' | 4.4' RT | 3' - 3 1/2" | Slip Base | | | | | |
| 109 | 215+42.99 | 5' - 6" | 1' - 0" | X | | G | | | | | X | 109 | X | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 102 and 111 (above) | | | | | | |
| 110 | 215+42.99 | 4' - 6" | 1' - 0" | X | | G | | | | | X | 110 | X | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 102 (above) and 110 (below) | | | | | | |
| 110 | 215+42.99 | 4' - 6" | 1' - 0" | X | | G | | | | | X | 110 | X | | | | | | | | | | | | | | | | | | | | | | | | | Back to back with 110 | | | | | | | |
| 111 | 202+56.19 | 30" | 30" | X | | Y | | | | | BK | X | 111 | X | | | | | | | | | | | | | | | | | | | | | | | | | 2" - 12 ga. | 11' | 23.8' RT | 3' - 3 1/2" | Slip Base | | |
| 112 | 102+73.77 | 8' - 0" | 2' - 6" | | X | G | | | | | X | 112 | X | | | | | | | | | | | | | | | | | | | | | | | | | | | 2 1/2" - 12 ga. | 10' | 23.6' RT | 3' - 3 1/2" | Two Posts; Slip Base | |
| 112 | 108+04.89 | 8' - 0" | 2' - 6" | | X | G | | | | | X | 112 | X | | | | | | | | | | | | | | | | | | | | | | | | | | | 2 1/2" - 12 ga. | 10' | 23.8' LT | 3' - 3 1/2" | Two Posts; Slip Base | |
| 113 | 207+29.36 | 6' - 0" | 2' - 6" | | X | G | | | | | X | 113 | X | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2 1/2" - 12 ga. | 10' | 29.3' RT | 3' - 3 1/2" | Two Posts; Slip Base |
| 113 | 212+39.09 | 6' - 0" | 2' - 6" | | X | G | | | | | X | 113 | X | | | | | | | | | | | | | | | | | | | | | | | | | | | | 2 1/2" - 12 ga. | 10' | 23.8' LT | 3' - 3 1/2" | Two Posts; Slip Base |

^{1/} BK= BLACK
 BL= BLUE
 BR= BROWN
 FY= FLUORESCENT YELLOW
 G= GREEN
 O= ORANGE
 R= RED
 RB= RED-BLUE
 SW= SILVER-WHITE
 W= WHITE
 Y= YELLOW
 YG= YELLOW-GREEN

^{2/} NOTE: L, C, R ARE LOCATIONS OF POSTS
 FACING THE SIGN.
 L=LEFT POST
 C=CENTER POST
 R=RIGHT POST

^{3/} DISTANCE FROM PROJECT
 CENTERLINE. FOR ADDITIONAL
 INFORMATION SEE STANDARD
 DRAWINGS TM601, TM602, AND
 TM635.

^{4/} NOTE: THE LOCATIONS SHOWN ARE
 APPROXIMATE EXCEPT FOR SPEED ZONES,
 SCHOOL ZONES, OBJECT MARKERS AND
 MILEPOST MARKERS. EXACT LOCATIONS ARE
 TO BE DETERMINED BY THE ENGINEER.

^{5/} MINIMUM DEPTH OF FOOTING FOR
 TRIANGULAR BASE BREAKAWAY AND MULTI-
 POST BREAKAWAY INSTALLATIONS IS FOR A 1'
 DIAMETER FOOTING. FOR ADDITIONAL
 INFORMATION SEE STANDARD DRAWINGS
 TM601 AND TM602.

| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | DRAWN LTN |
| | | | CHECKED HJS |
| | | | APPROVED SGB |

ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY

FILE NAME
 JOB No.
 DATE



PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
 INTERSECTION IMPROVEMENTS**
 DESCHUTES COUNTY

FOR BIDDING REFERENCE ONLY

SIGN & POST DATA TABLE

DRAWING NO.
 30 OF 43

SS5

CURVE SIGN & POST DATA TABLE
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS

| SIGN NO. | SIGN LOCATION 4/ | SIGN DIMENSIONS | | SUB-STRATE | COLOR 1/ | | | | | LEGENED | SIGN NO. 2/ | TYPE OF SUPPORT | | | | | | | | | | | | | | | | | POST | | FOOTING | | REMARKS | | | | | | | | |
|----------|---------------------|-----------------|--------|------------|------------|--------|--|--|----|---------|-------------|--------------------------------|--|-----------------------------------|---------|---|-------------------------------------|---------------------------|-----------------------------|--------------------------------|--------------------------------------|--|---------------------------------------|----------------------------|------------------------------------|-------------------------------------|--|-------------------------|--------------------------------|------|---------|-------------|---------|---------------|--|--|--|--|--------------------------------------|--|--------------------------------------|
| | | WIDTH | HEIGHT | | BACKGROUND | LEGEND | | | | | | WOOD POST (TM670-TM671, TM676) | SQ. TUBE SIGN SUPPORT (TM671, TM676, TM681, TM687-TM689) | TRIANGULAR BASE BREAKAWAY (TM602) | H-FRAME | MULTI-POST BREAKAWAY (TM220, TM600-TM601) | STAINLESS STEEL CLAMP (SSC) (TM677) | SIGNAL POLE MOUNT (TM680) | MAST ARM SIGN MOUNT (TM679) | BRIDGE STRUCTURE MOUNT (TM677) | CANTILEVER / BUTTERFLY (TM622-TM627) | SIGN BRIDGE (TM606-TM612, TM614-TM620) | EXIT NUMBER SIGN MOUNT (TM220, TM225) | ROUTE MARKER FRAME (TM678) | MILEPOST MARKER POST (TM221-TM222) | CROSSWALK CLOSURE BARRICADE (TM490) | VERTICAL SIGN MOUNTS ON EXISTING STRUCTURE | CUSTOM VARIABLE SUPPORT | SECONDARY SIGN (TM676 & TM678) | SIZE | LENGTH | LOCATION 3/ | | MIN. DEPTH 5/ | | | | | | | |
| 105b | TO 243+22.40 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing NB traffic |
| 105b | TO 244+36.48 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing NB traffic | | |
| 105b | TO 258+95.91 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing SB Traffic | | |
| 105b | TO 260+09.51 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing SB Traffic | | |
| 105b | TO 261+22.11 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing SB Traffic | | |
| 105b | TO 262+34.23 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing SB Traffic | | |
| 105b | TO 263+47.10 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing SB Traffic | | |
| 105b | TO 265+05.15 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing SB Traffic | | |
| 105b | TO 266+20.85 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing SB Traffic | | |
| 105b | TO 343+11.88 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing NB Traffic | | |
| 105b | TO 343+81.65 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing NB Traffic | | |
| 105b | TO 344+51.46 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing NB Traffic | | |
| 105b | TO 345+21.26 | 18" | 24" | X | Y | | | | BK | X | 105b | X | | | | | | | | | | | | | | | | | | | | | | | | | | | Same post as 105a, Facing NB Traffic | | |

1/ BK= BLACK
 BL= BLUE
 BR= BROWN
 FY= FLUORESCENT YELLOW
 G= GREEN
 O= ORANGE
 R= RED
 RB= RED-BLUE
 SW= SILVER-WHITE
 W= WHITE
 Y= YELLOW
 YG= YELLOW-GREEN

2/ NOTE: L, C, R ARE LOCATIONS OF POSTS
 FACING THE SIGN.
 L=LEFT POST
 C=CENTER POST
 R=RIGHT POST

3/ DISTANCE FROM PROJECT
 CENTERLINE. FOR ADDITIONAL
 INFORMATION SEE STANDARD
 DRAWINGS TM601, TM602, AND TM635.

4/ NOTE: THE LOCATIONS SHOWN ARE
 APPROXIMATE EXCEPT FOR SPEED ZONES,
 SCHOOL ZONES, OBJECT MARKERS AND
 MILEPOST MARKERS. EXACT LOCATIONS ARE
 TO BE DETERMINED BY THE ENGINEER.

5/ MINIMUM DEPTH OF FOOTING FOR
 TRIANGULAR BASE BREAKAWAY AND MULTI-
 POST BREAKAWAY INSTALLATIONS IS FOR A 1'
 DIAMETER FOOTING. FOR ADDITIONAL
 INFORMATION SEE STANDARD DRAWINGS
 TM601 AND TM602.

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED | DRAWN | CHECKED | APPROVED |
|-----------|------|----|----------|-------|---------|----------|
| | | | LTN | LTN | HJS | SGB |

**ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY**
 FILE NAME _____
 JOB No. _____
 DATE _____



PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
 INTERSECTION IMPROVEMENTS**
 DESCHUTES COUNTY

CURVE SIGN & POST DATA TABLE



DRAWING NO.
32 OF 43
SS7

STRIPING PLAN
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS

CONSTRUCTION NOTES:

① End yellow line and begin white line at the end of island curb.


Install 18" Surface Mounted
 Tubular Markers at 50' spacing.
 Typical to all approaches.

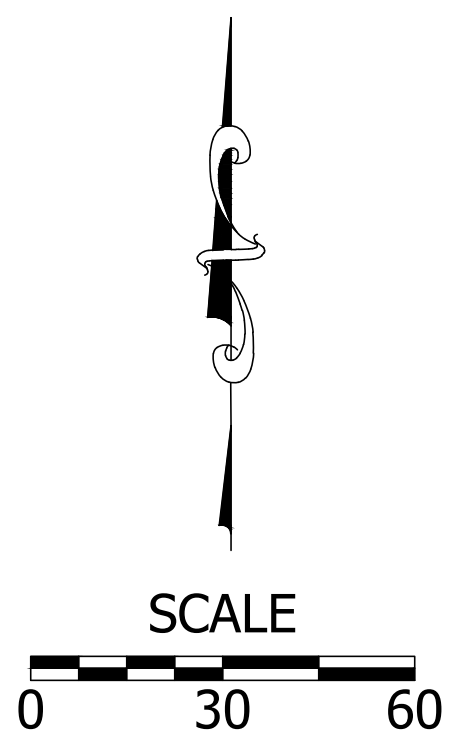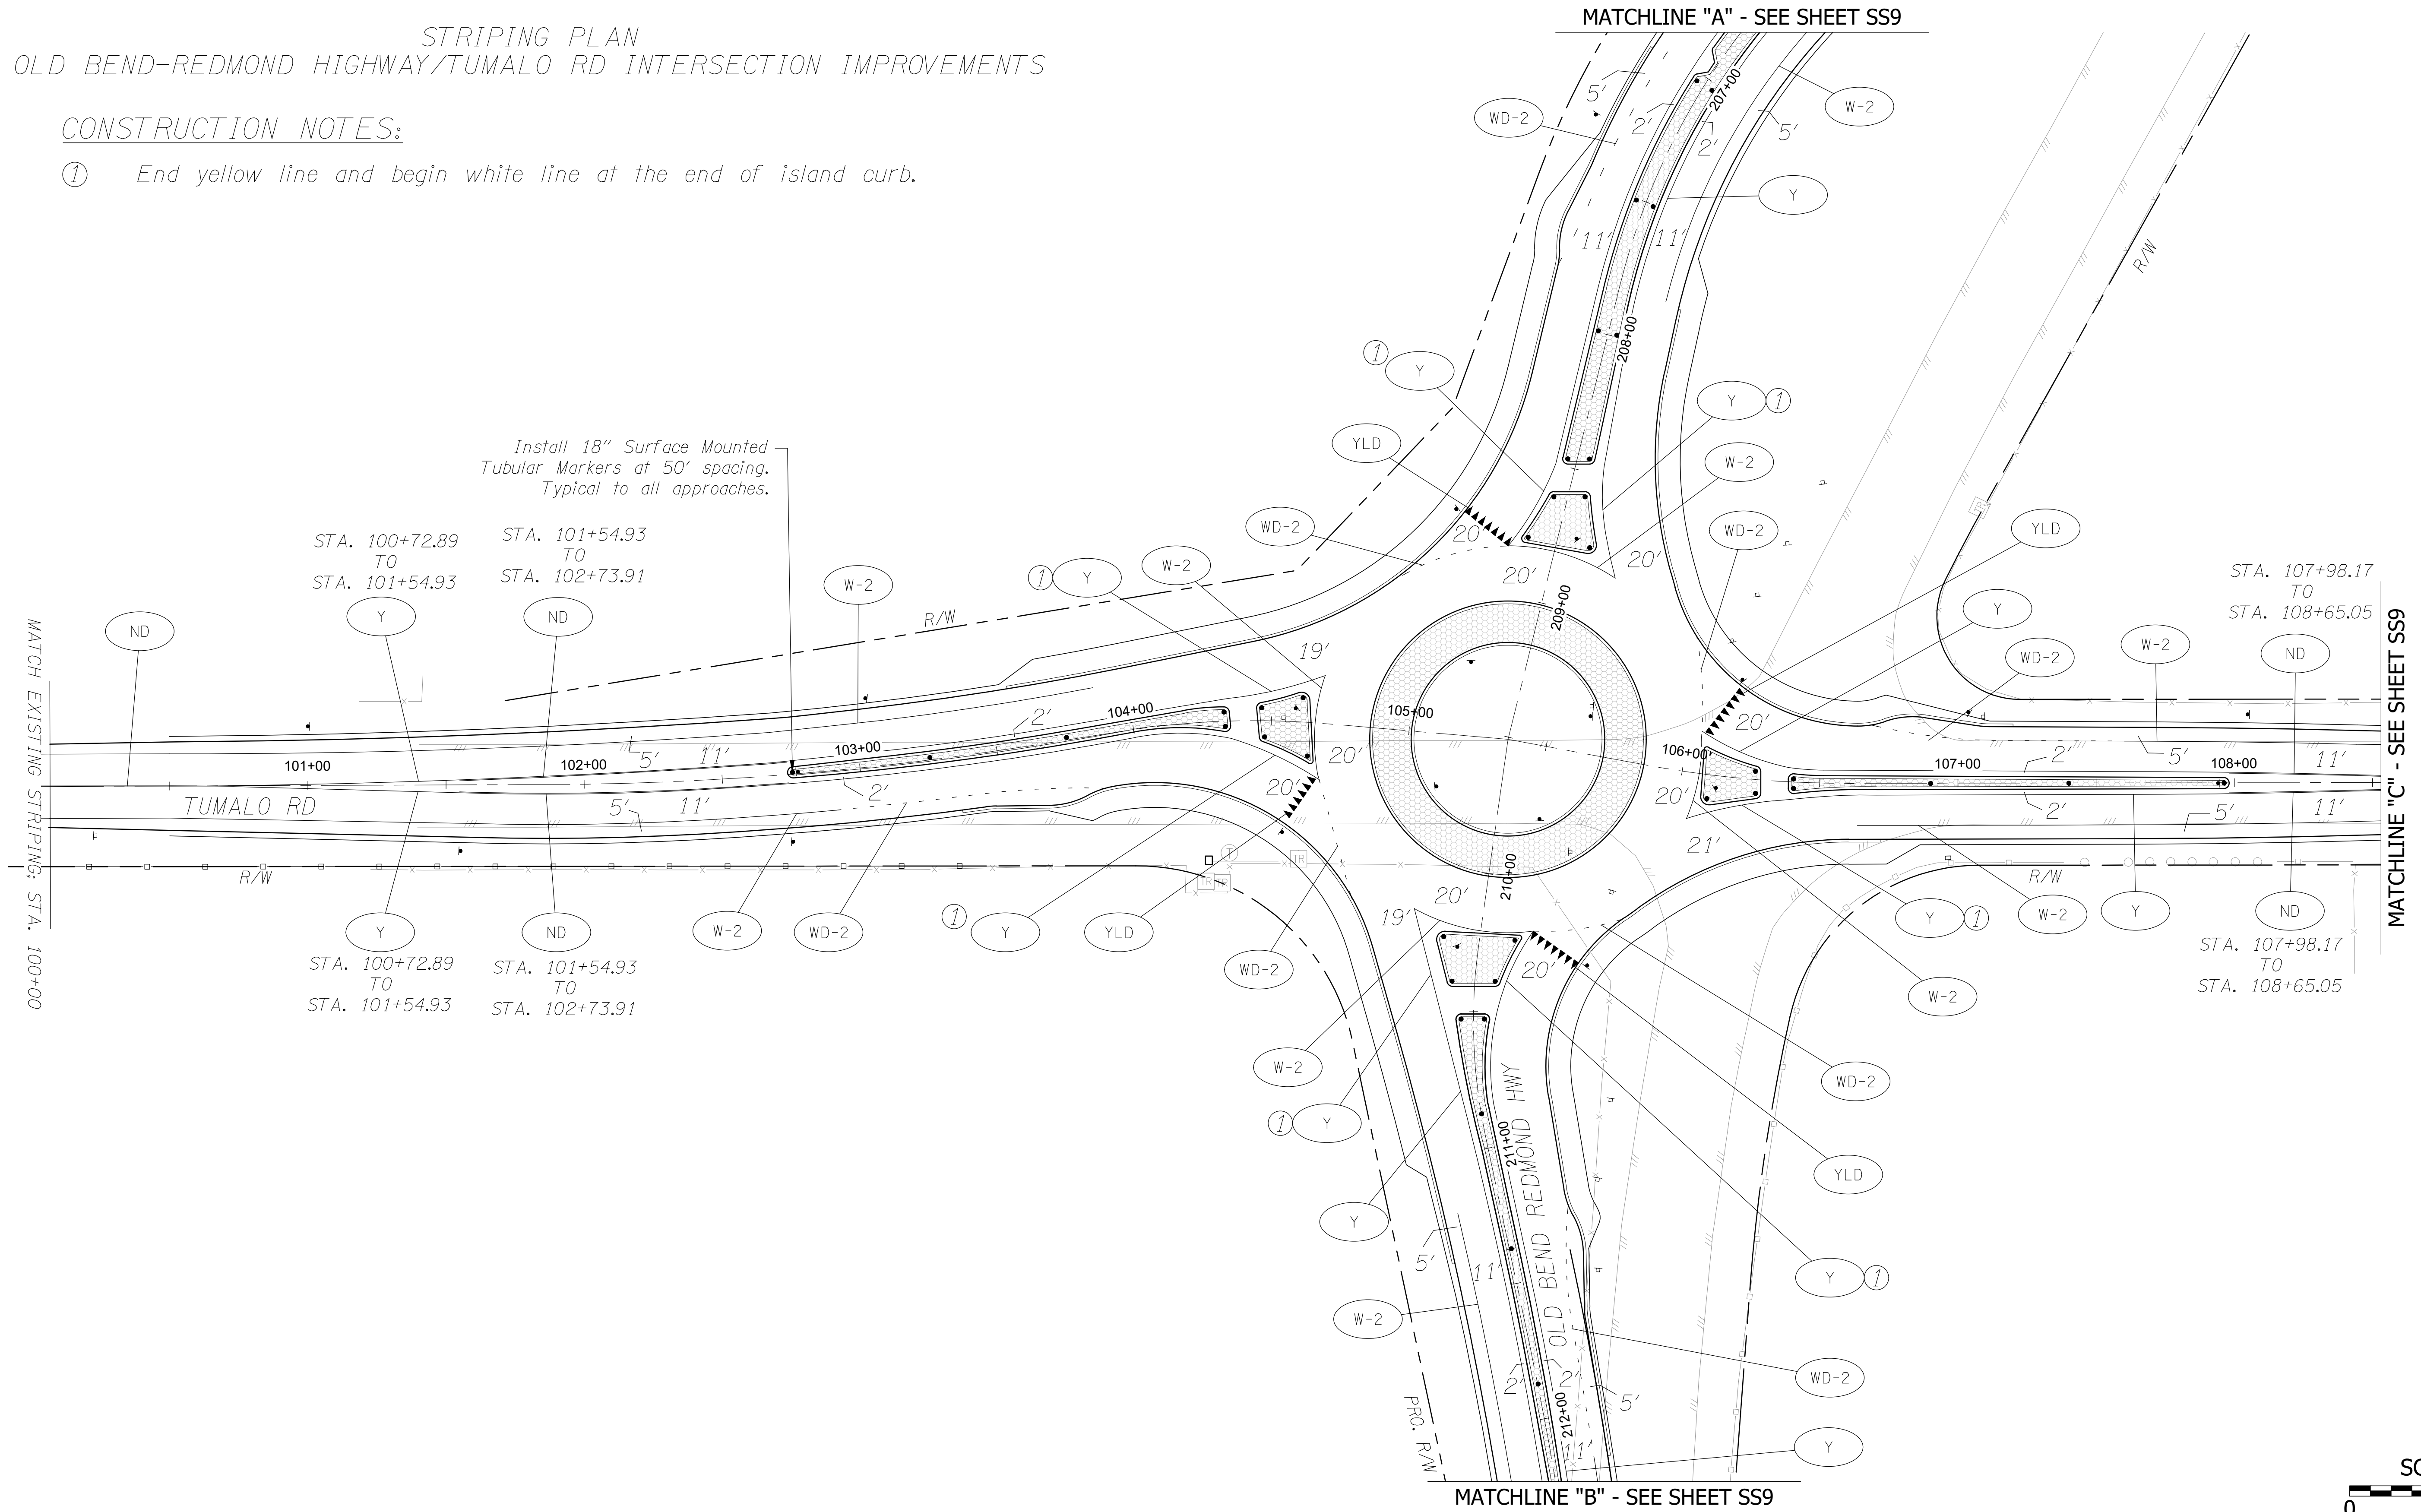

| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | DRAWN LTN |
| | | | CHECKED HJS |
| | | | APPROVED SGB |

ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY

FILE NAME
 JOB No.
 DATE






PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
 INTERSECTION IMPROVEMENTS**
 DESCHUTES COUNTY

FOR BIDDING REFERENCE ONLY

STRIPING PLAN

DRAWING NO.
 33 OF 43
SS8


STRIPING PLAN
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS

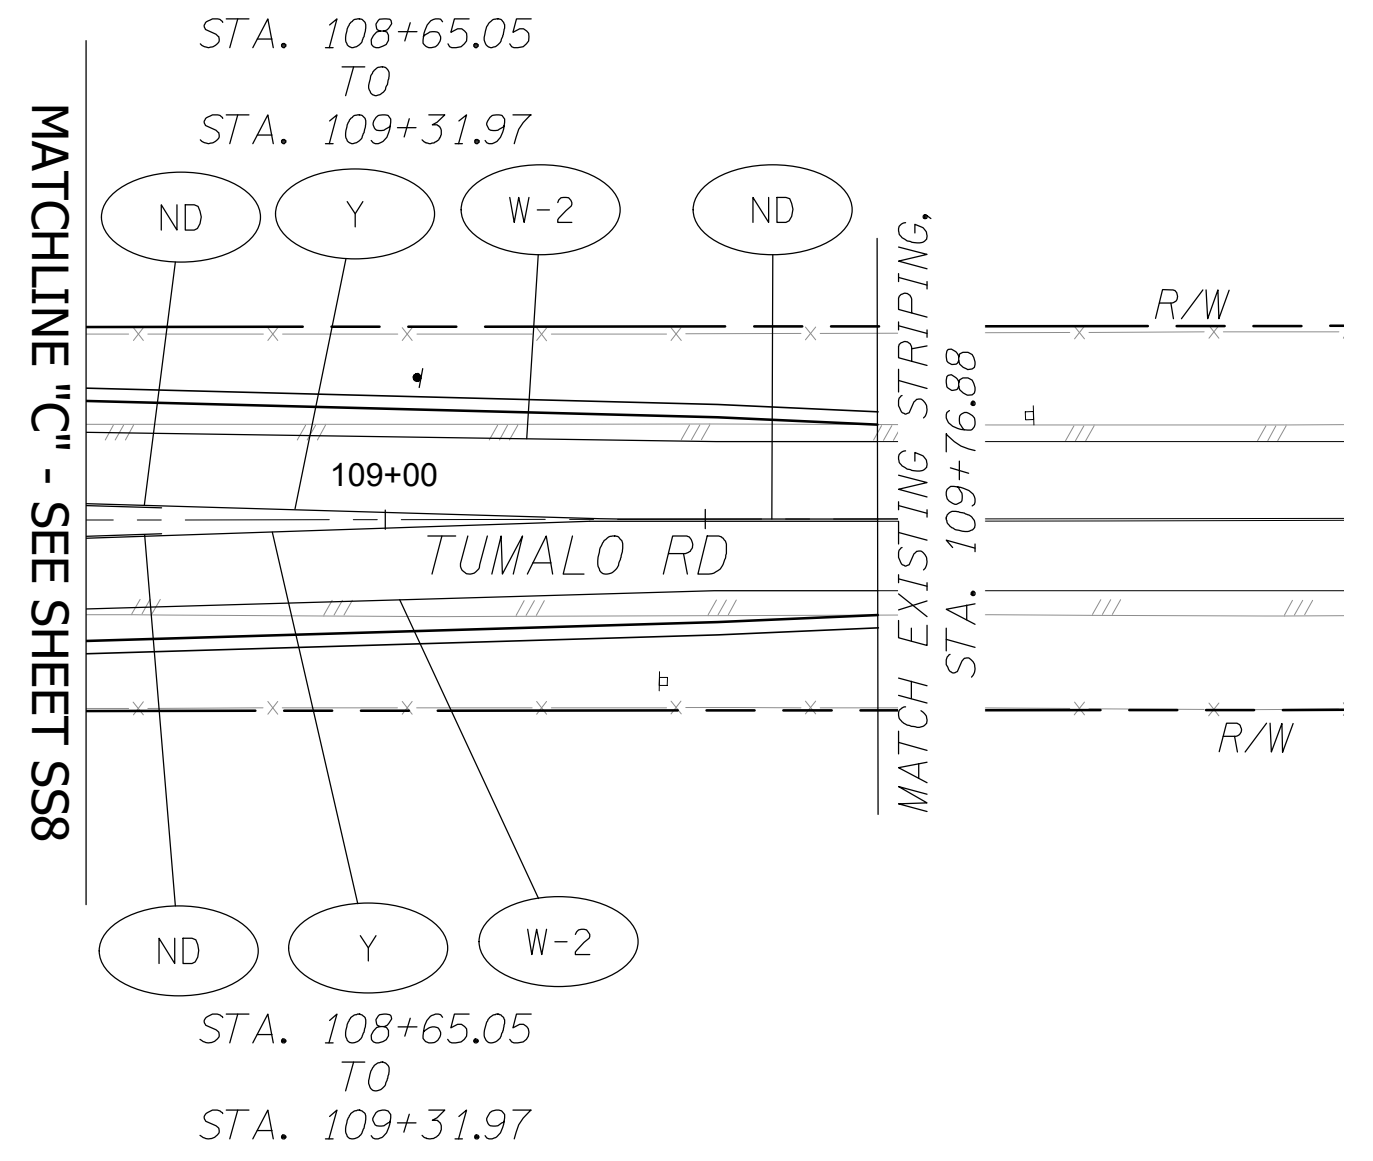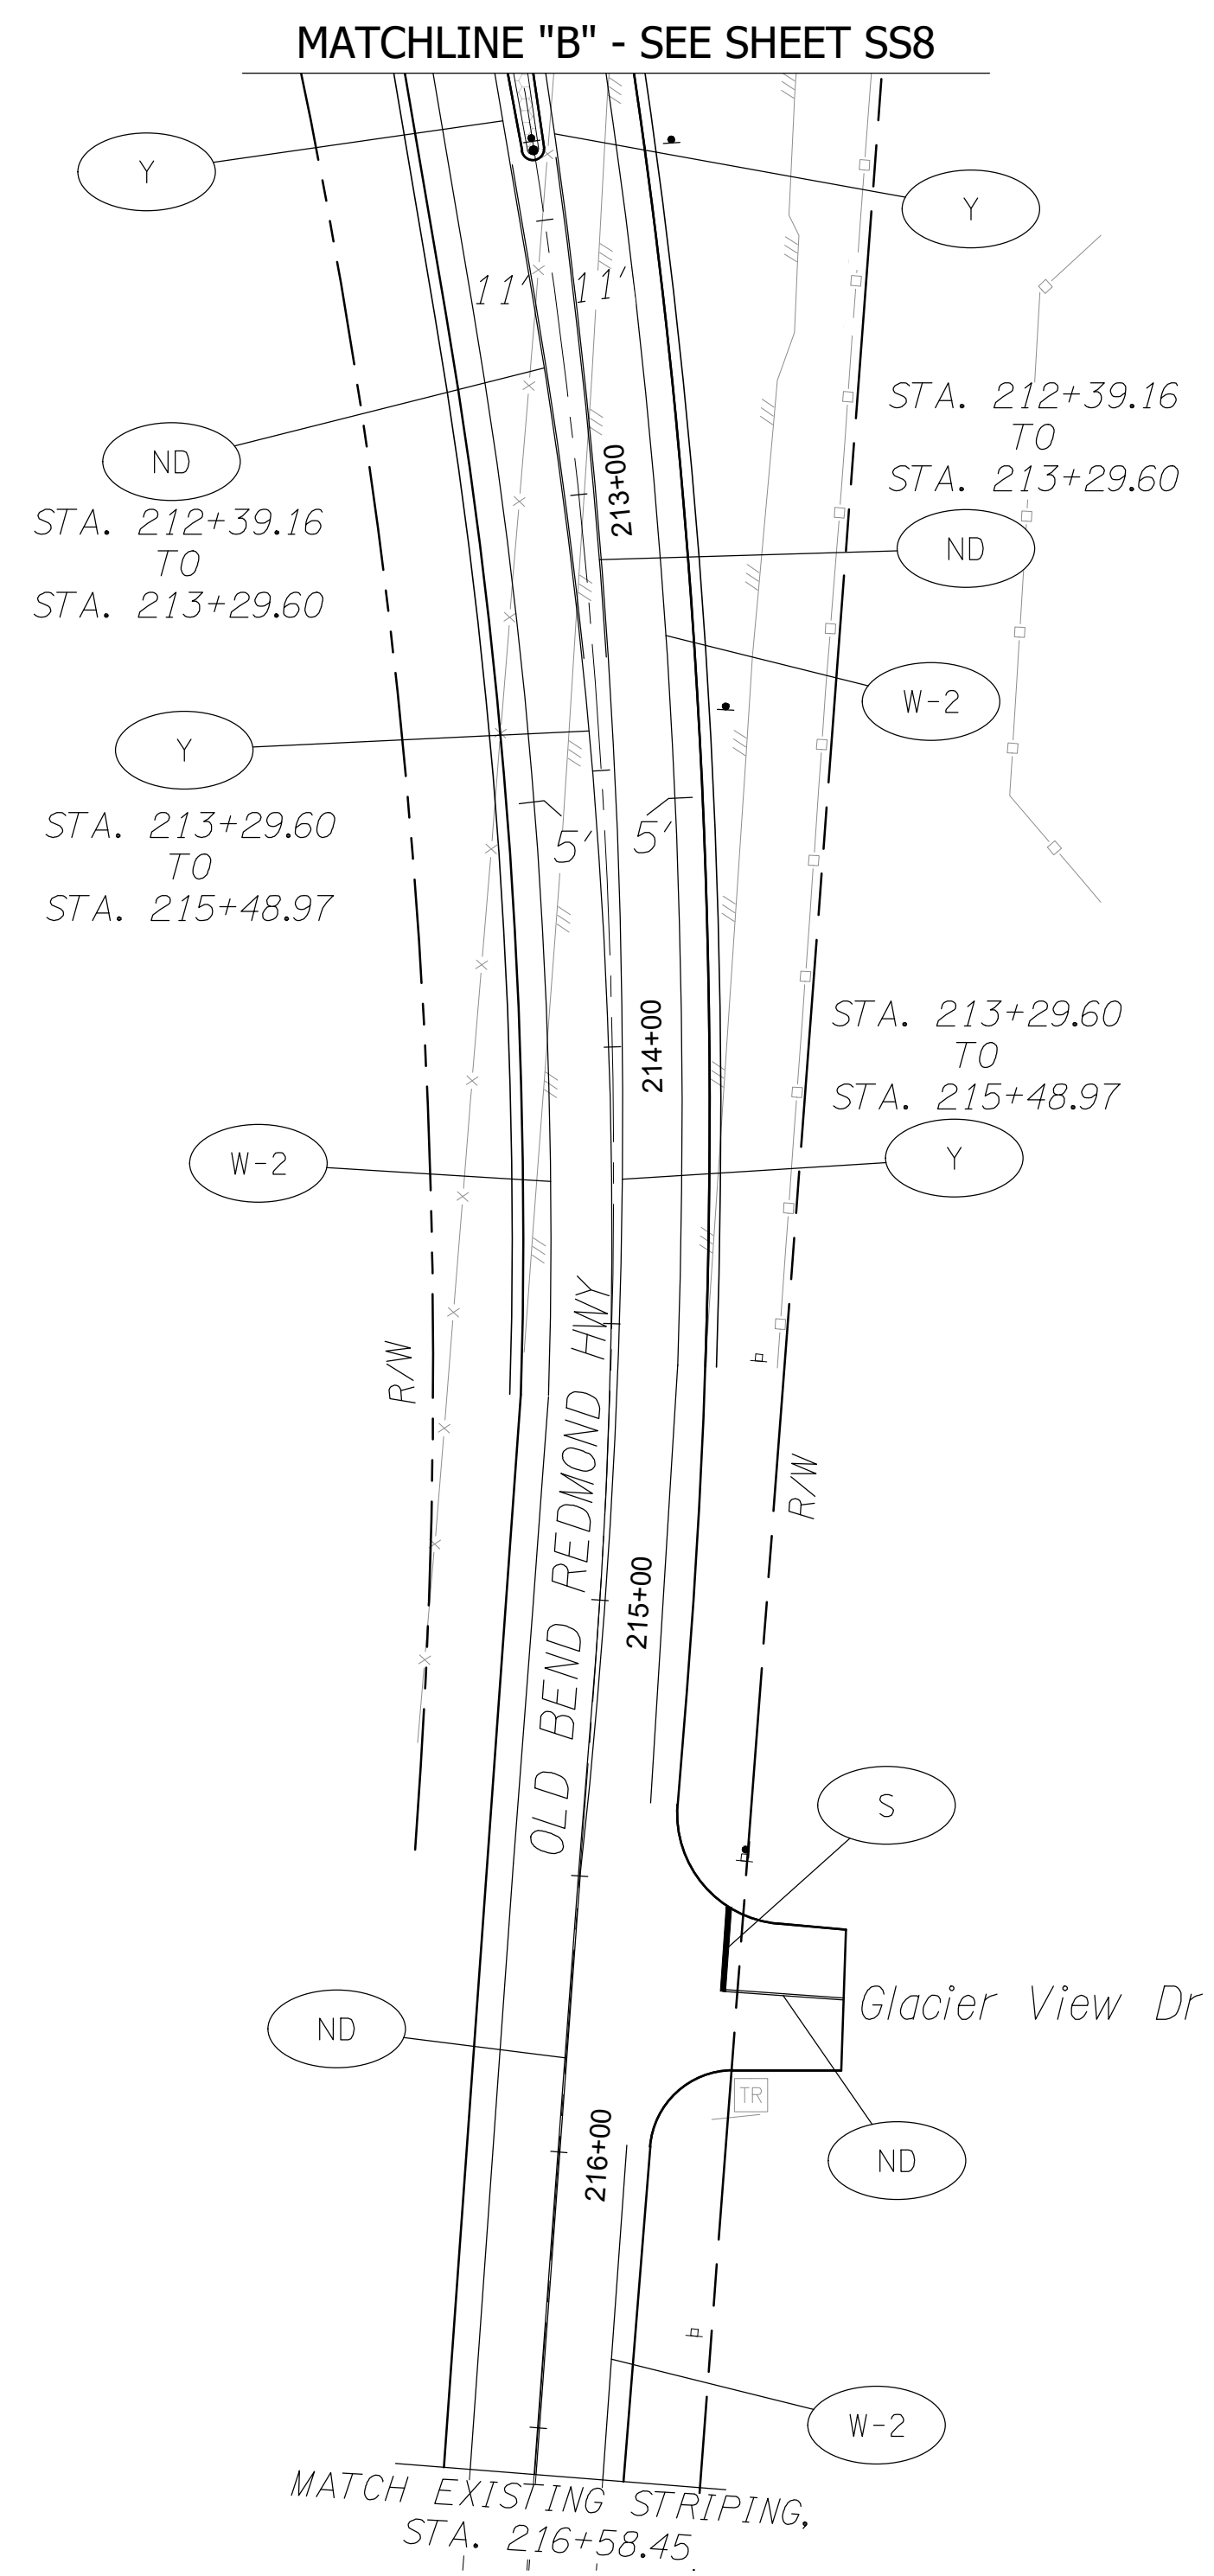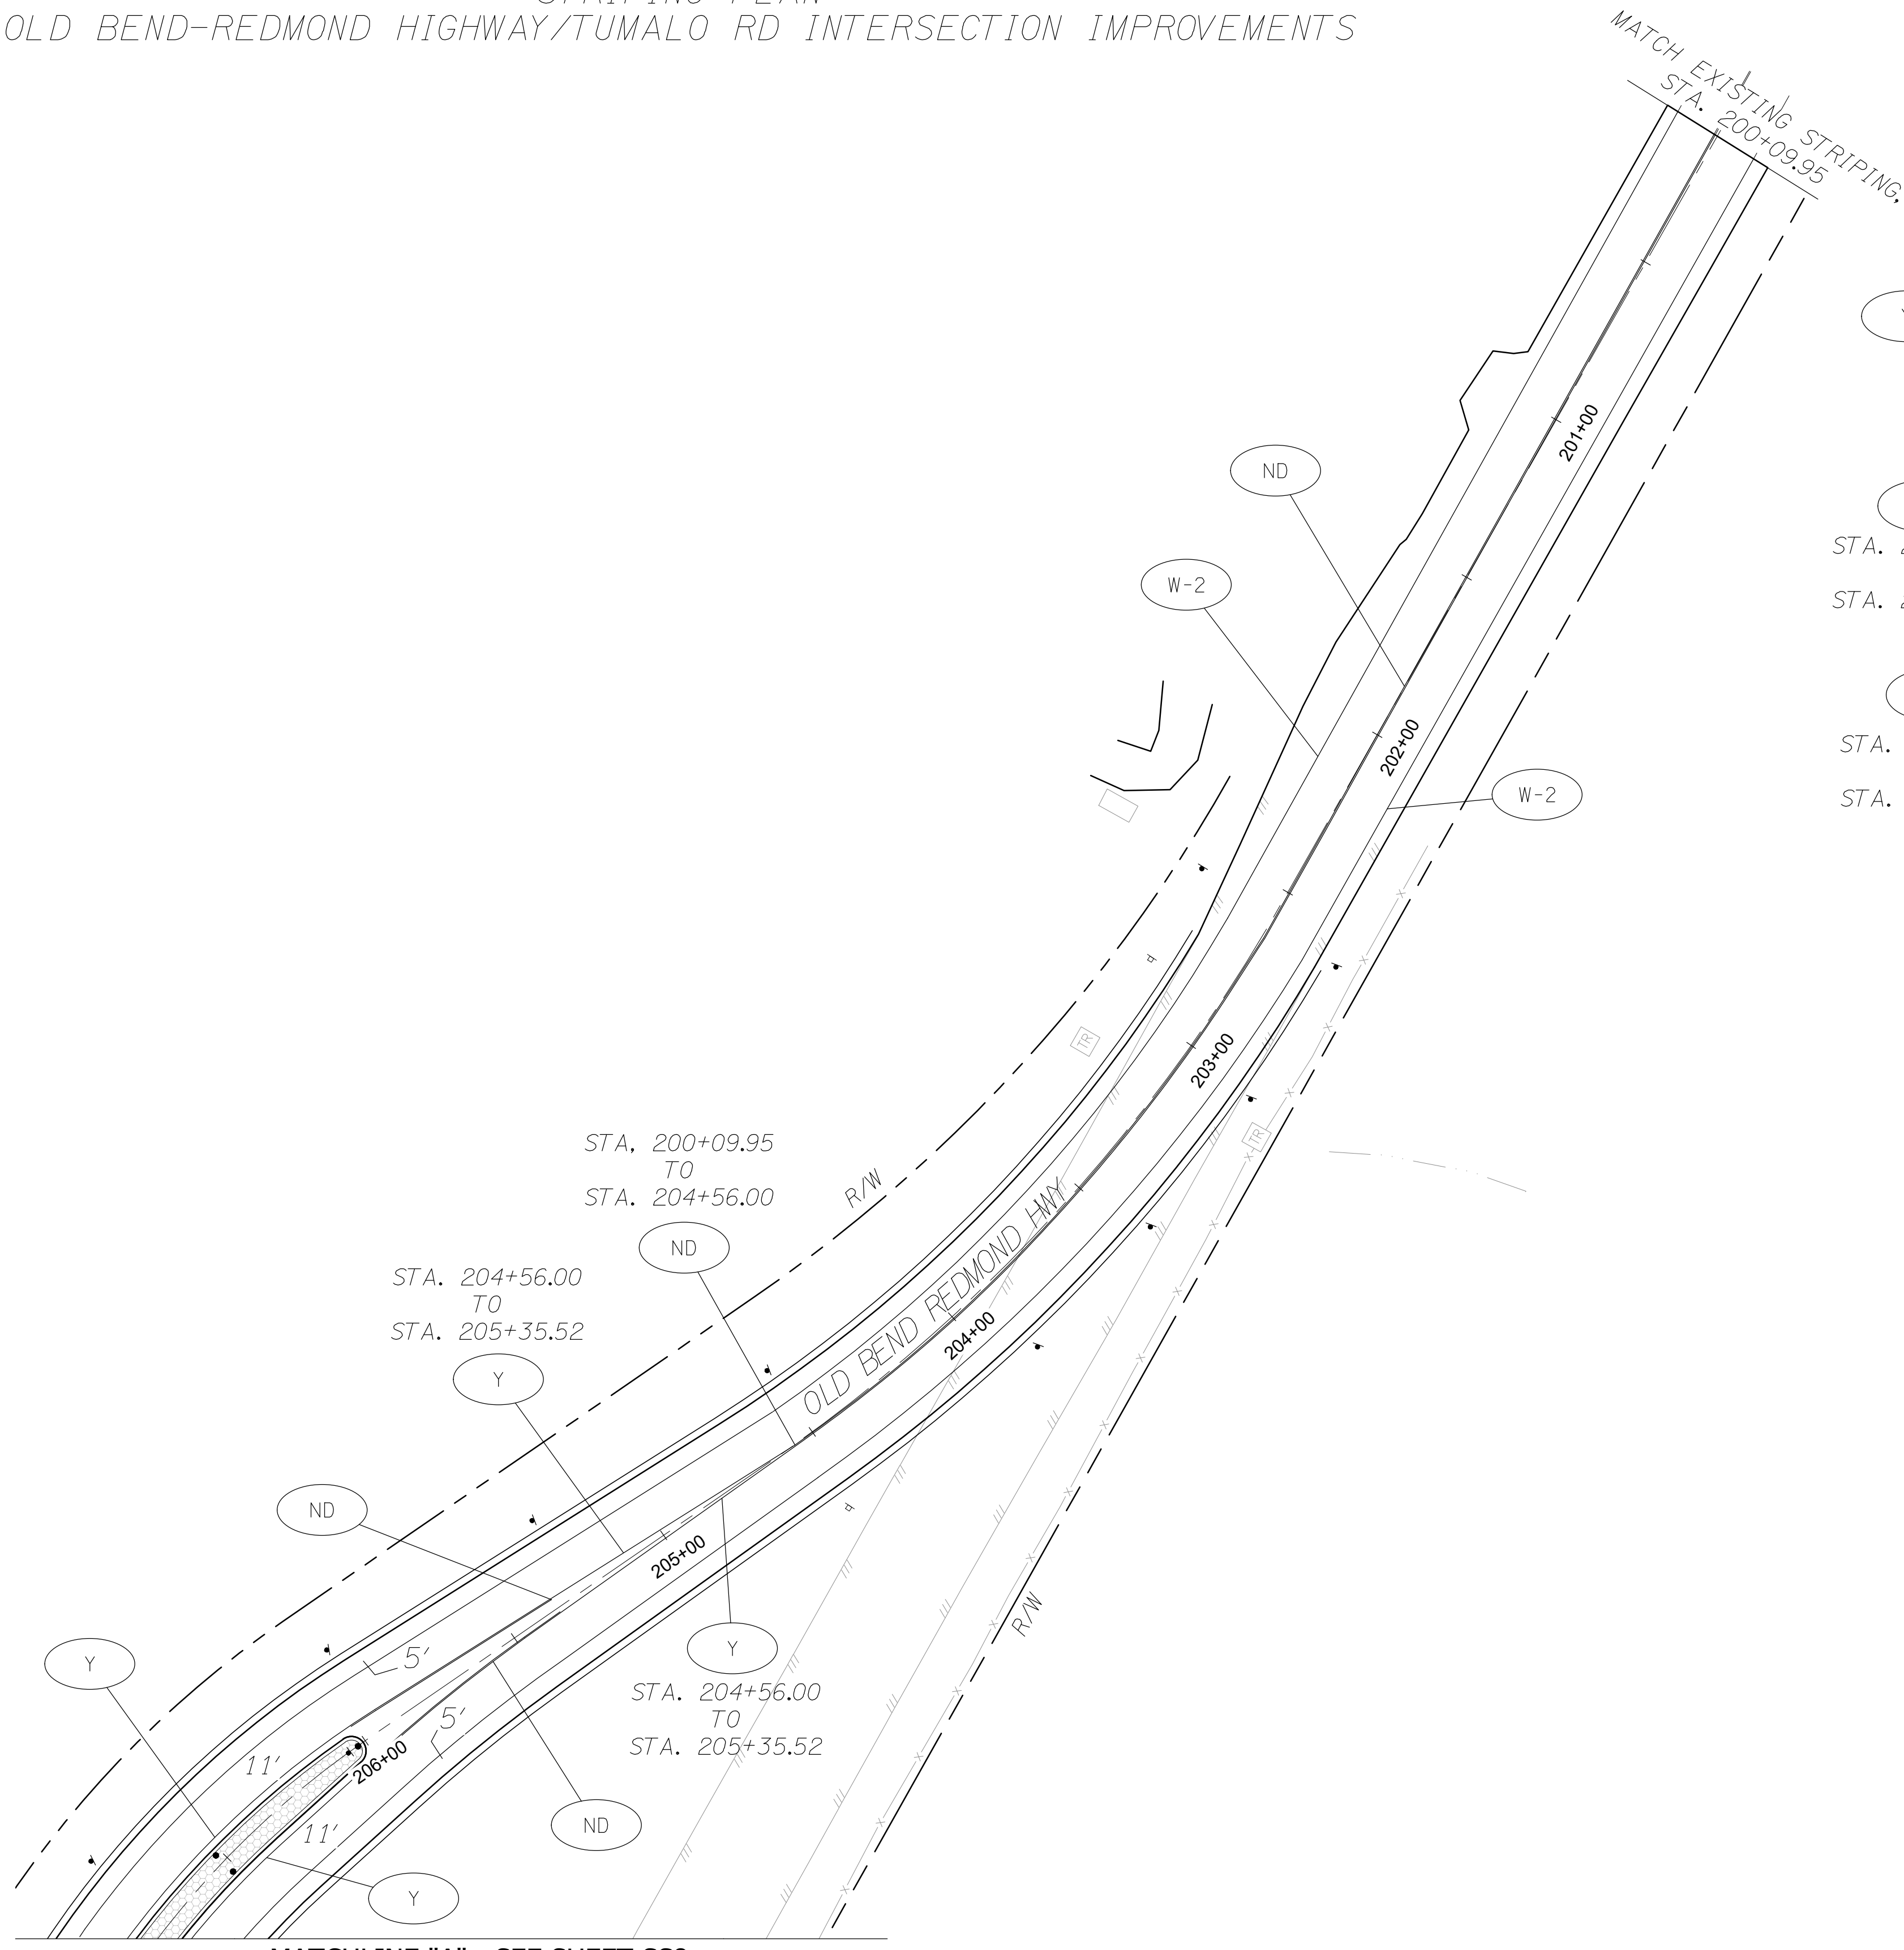

MATCHLINE "A" - SEE SHEET SS8

MATCH EXISTING STRIPING,
 STA. 216+58.45

MATCHLINE "C" - SEE SHEET SS8

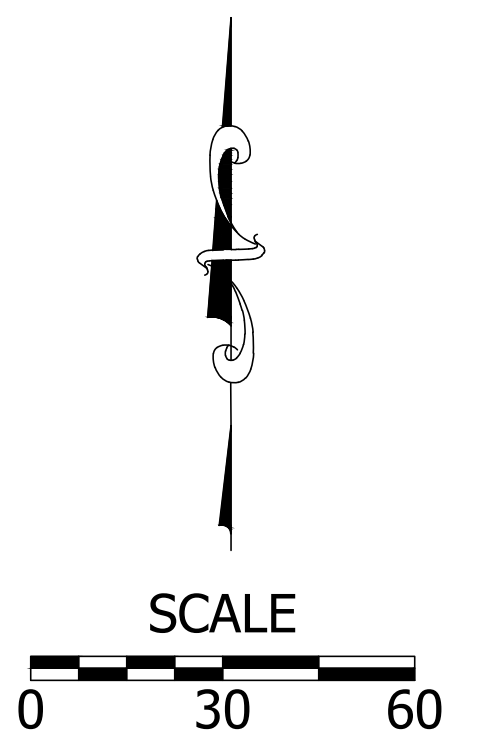

| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY

FILE NAME

JOB No.

DATE





PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
 INTERSECTION IMPROVEMENTS**
 DESCHUTES COUNTY

FOR BIDDING REFERENCE ONLY

STRIPING PLAN

DRAWING NO.
 34 OF 43
SS9

SIGNING PLAN
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS

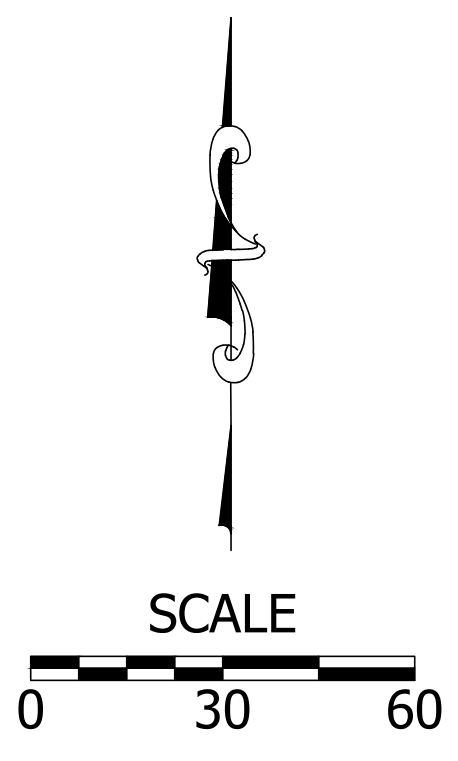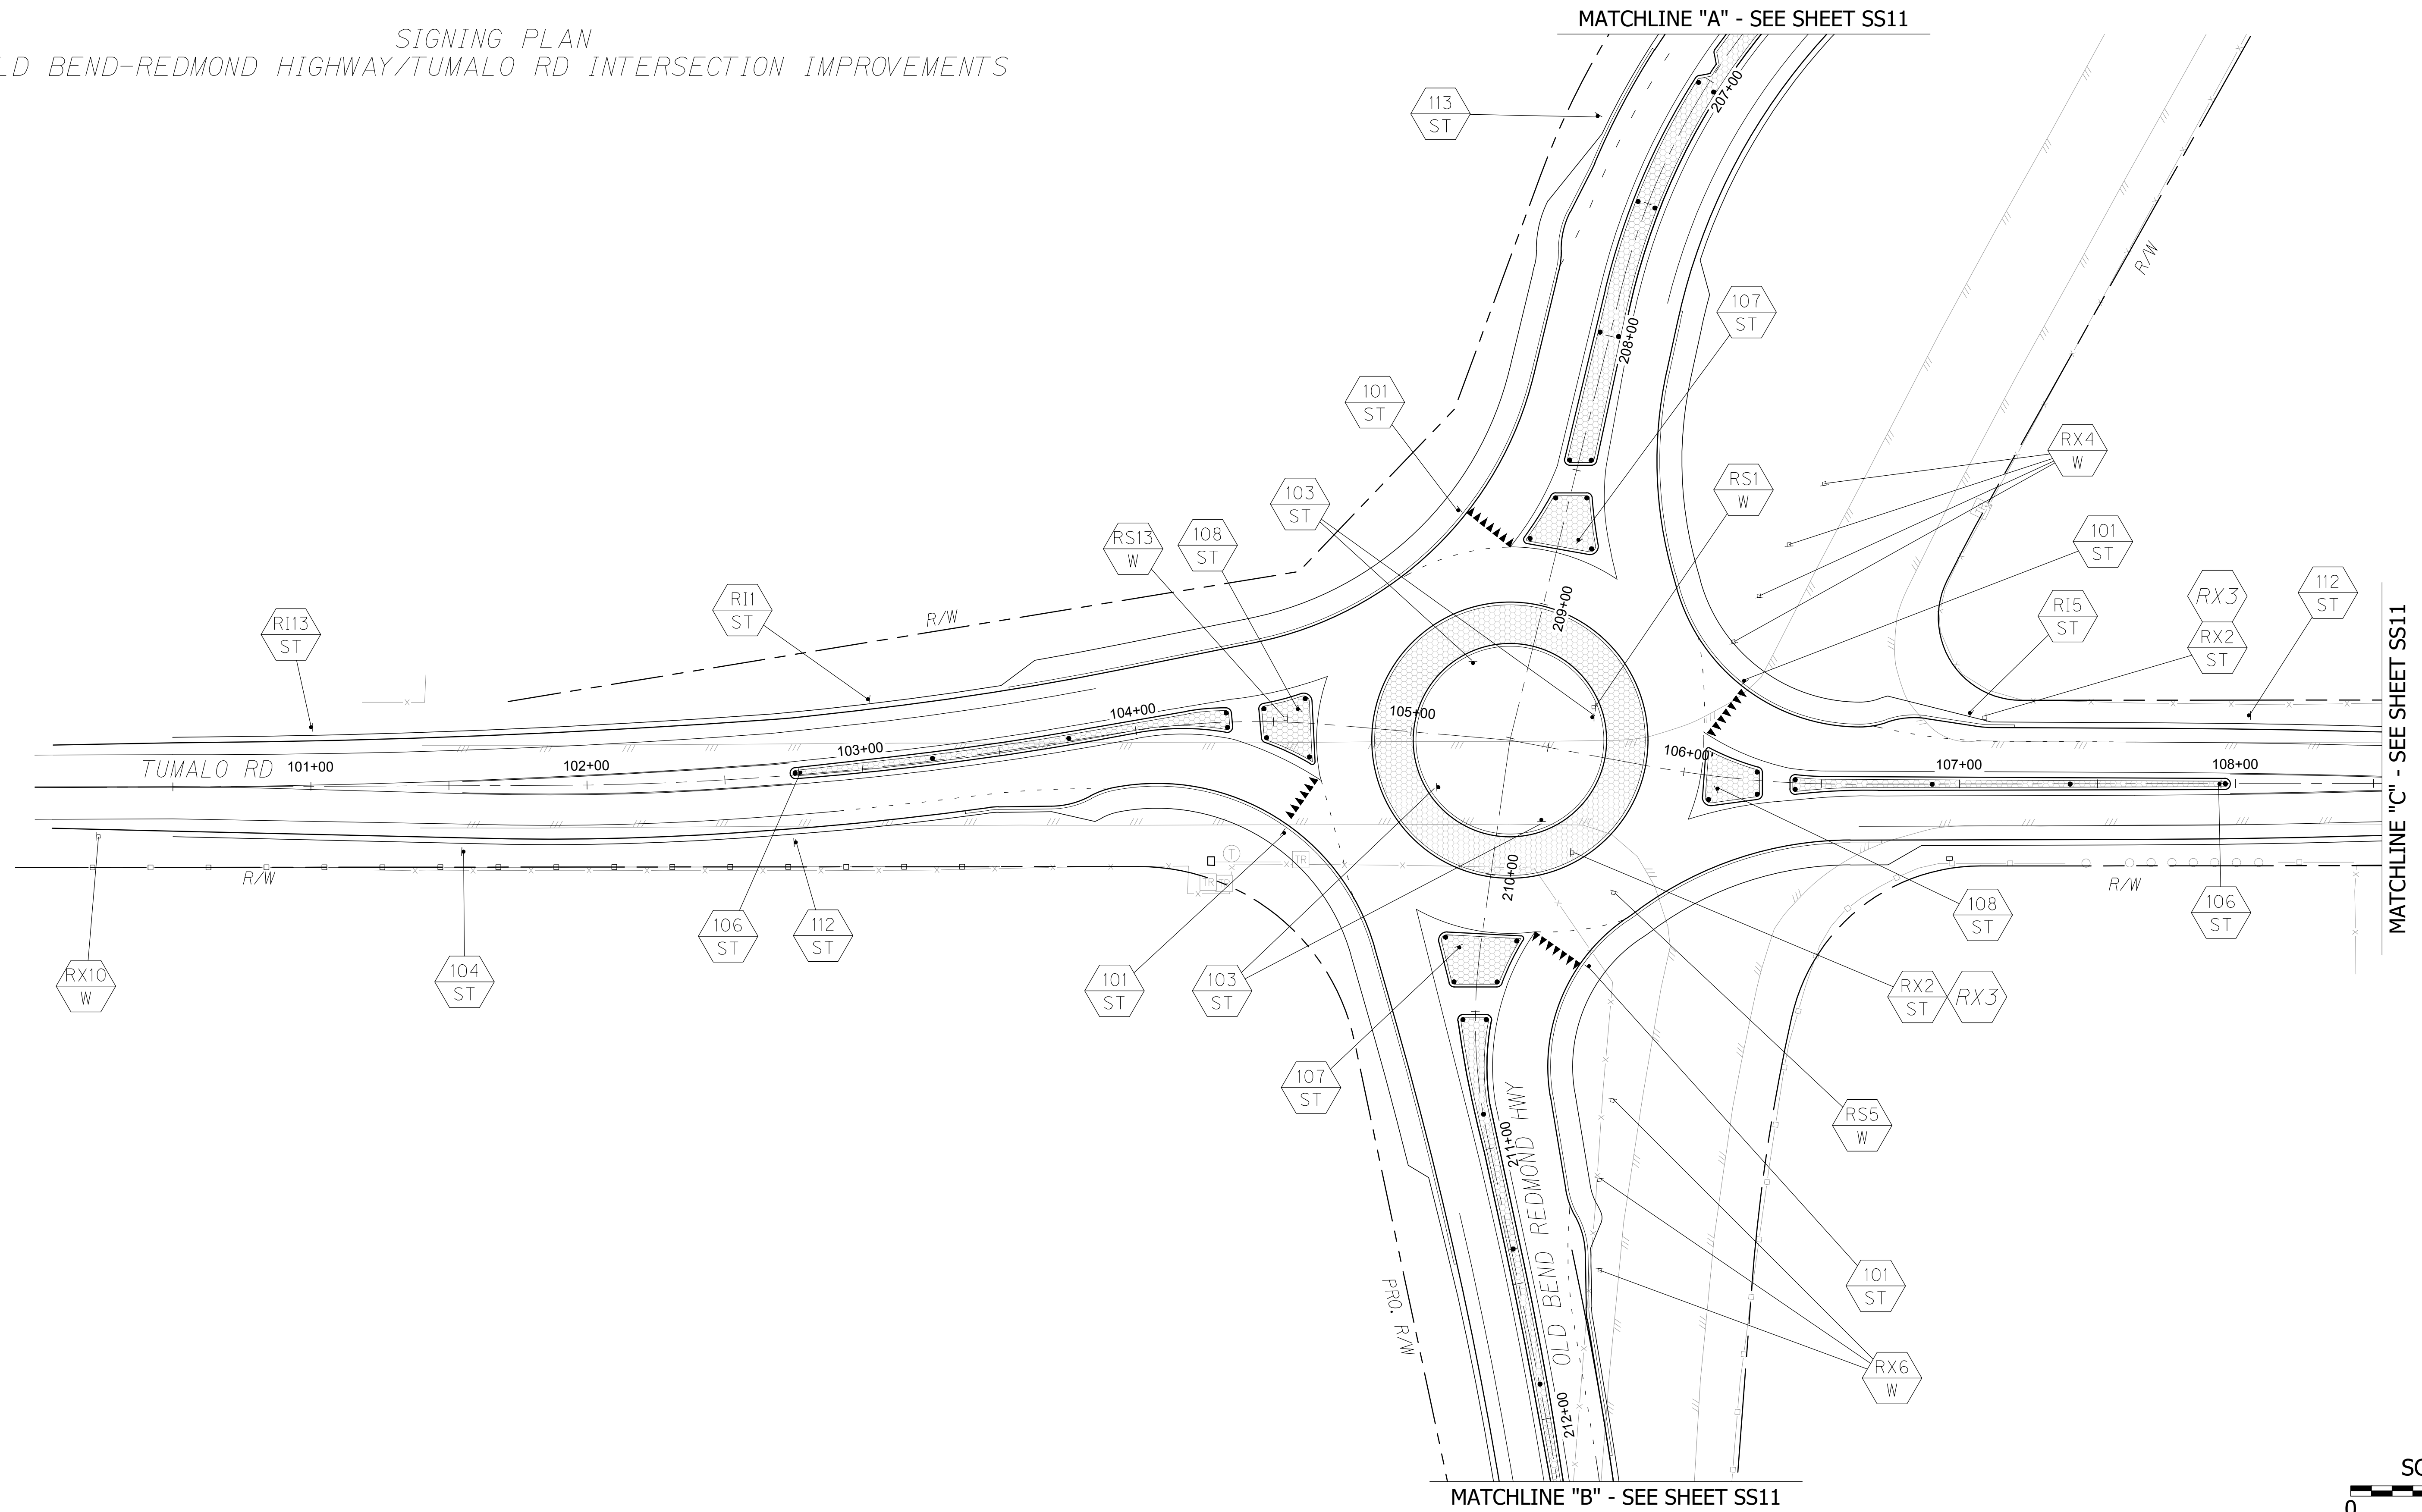

| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | DRAWN LTN |
| | | | CHECKED HJS |
| | | | APPROVED SGB |

**ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY**

FILE NAME
 JOB No.
 DATE







PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
 INTERSECTION IMPROVEMENTS**
 DESCHUTES COUNTY

FOR BIDDING REFERENCE ONLY

SIGNING PLAN

DRAWING NO.
 35 OF 43
SS10

SIGNING PLAN
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS

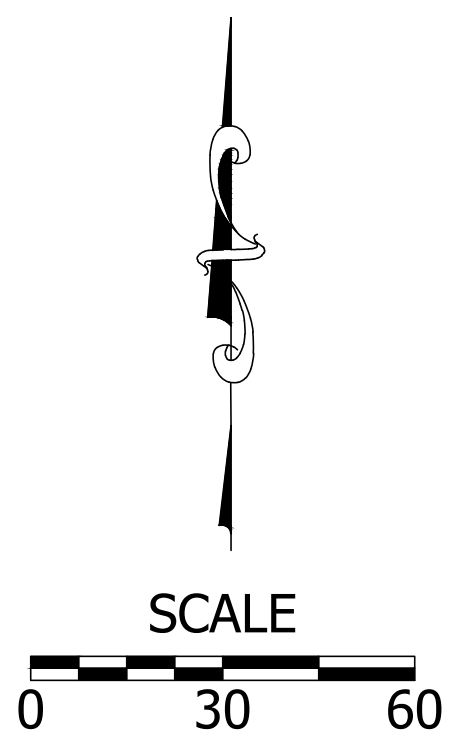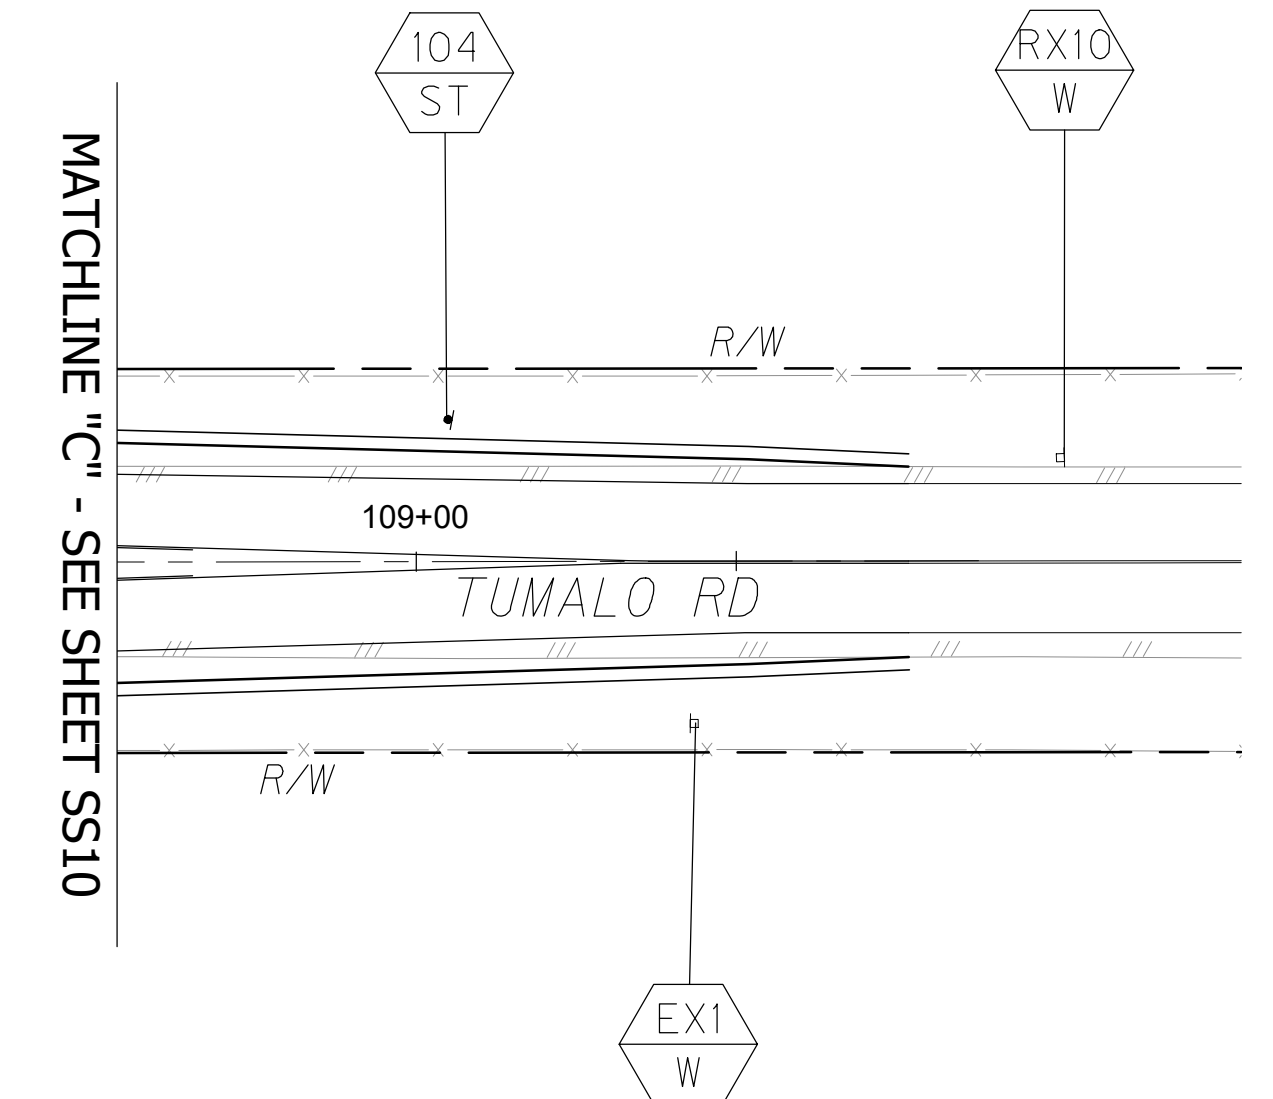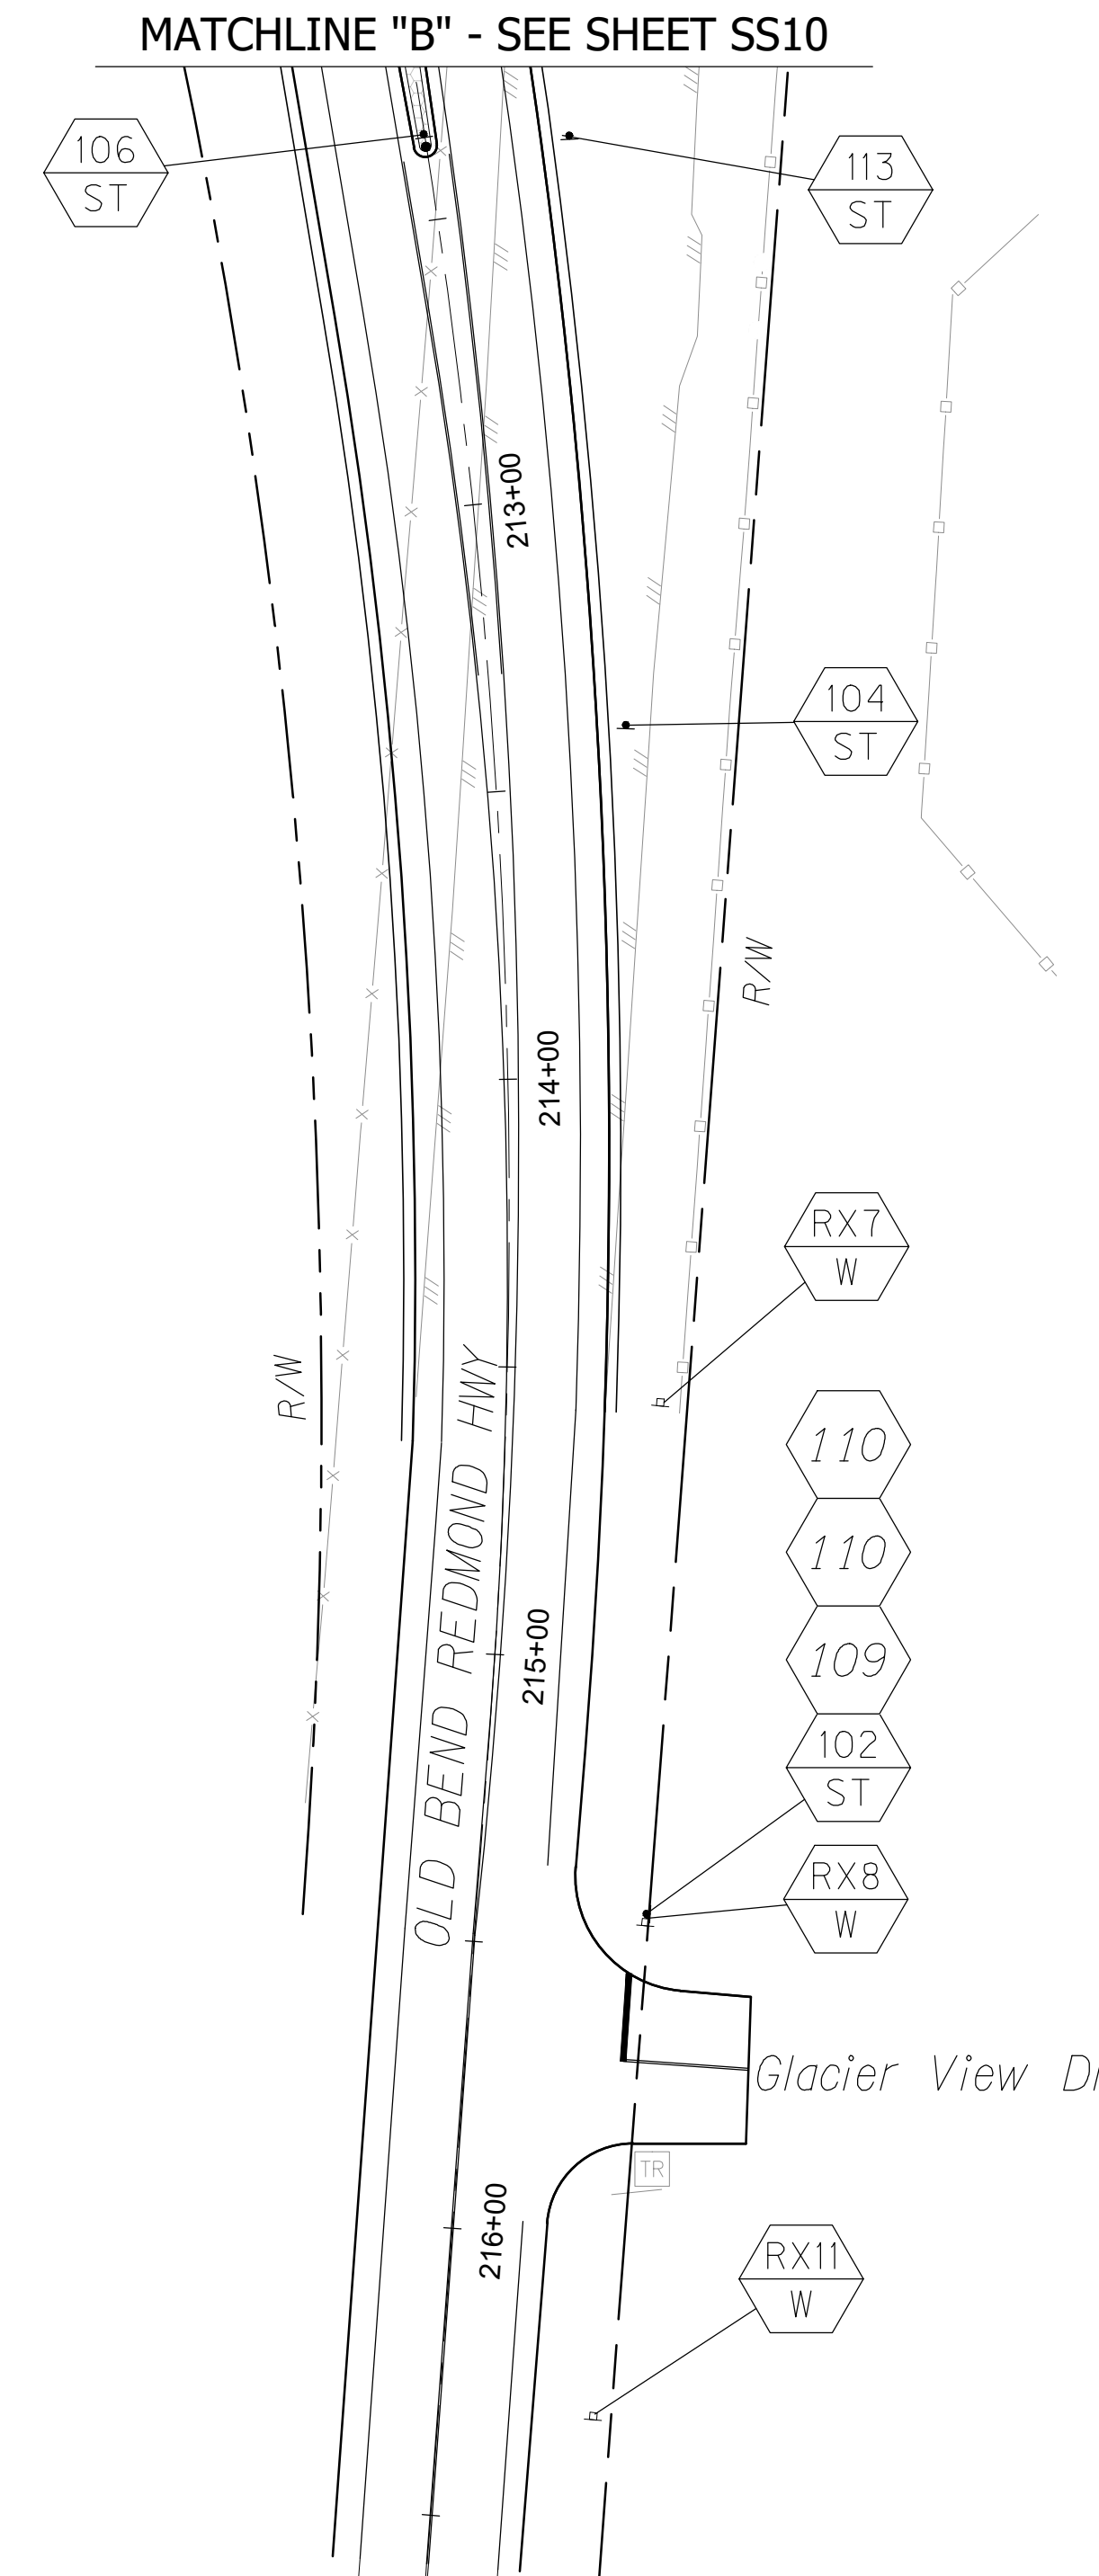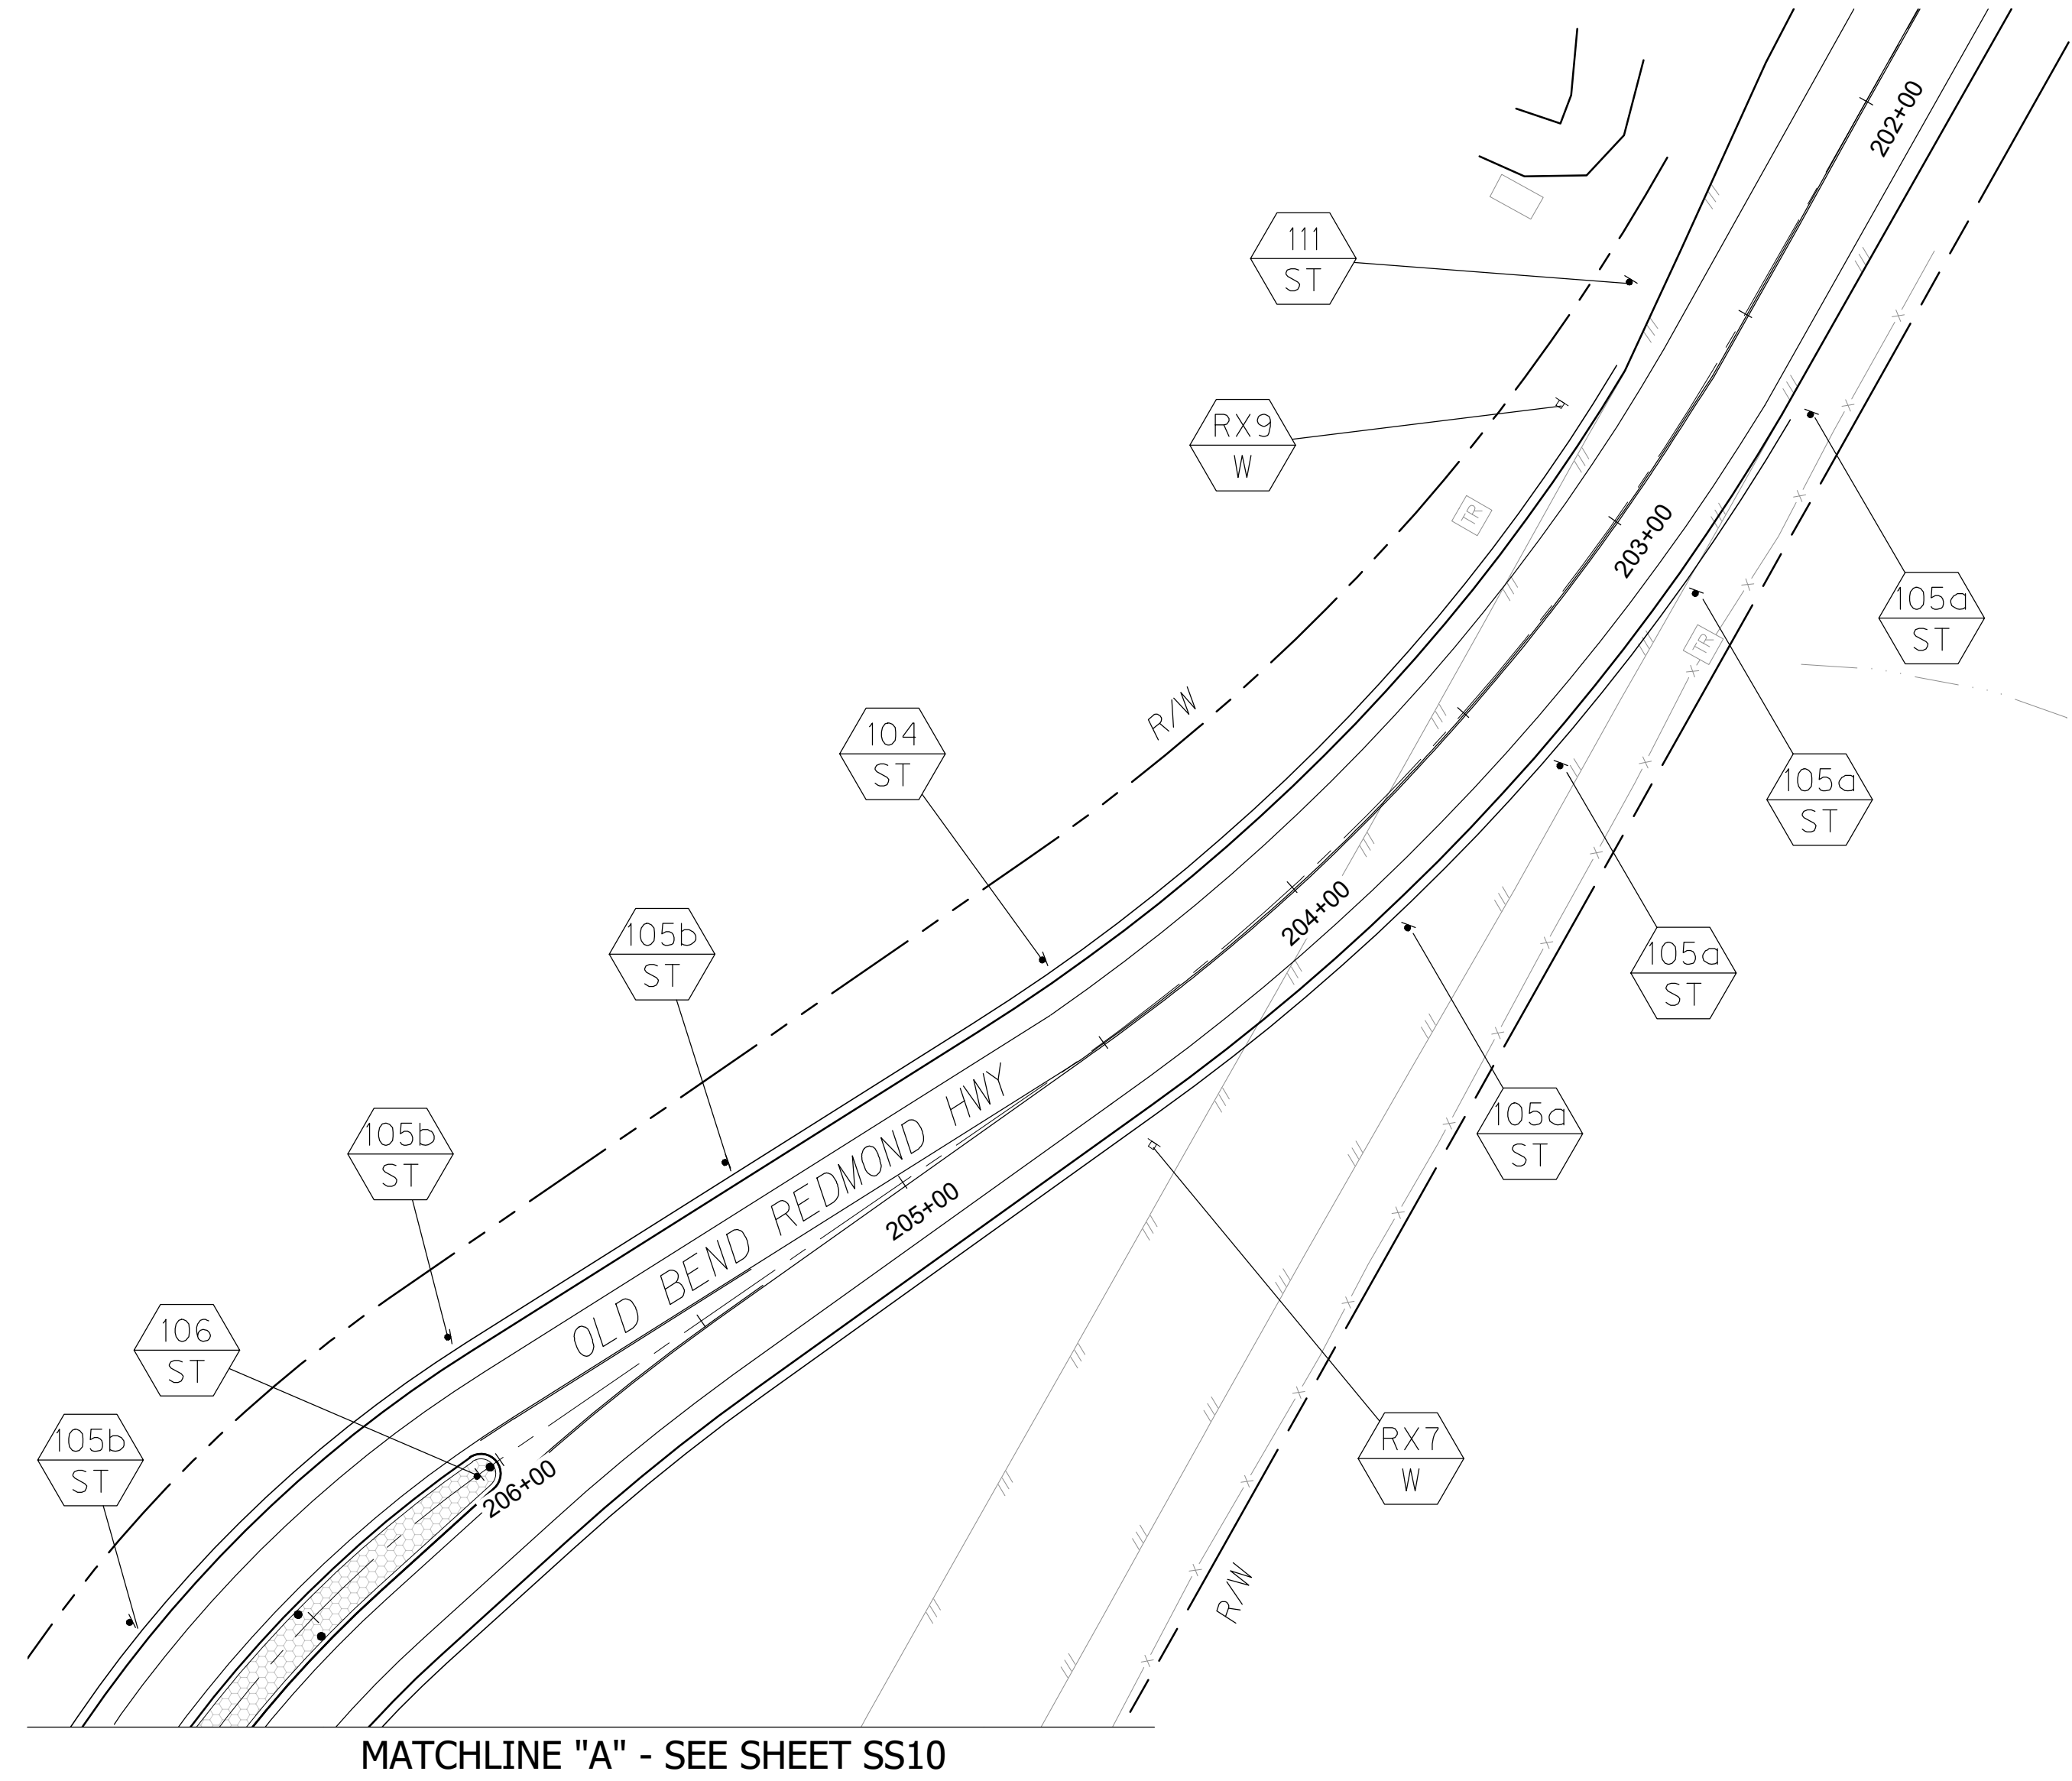

| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | DRAWN LTN |
| | | | CHECKED HJS |
| | | | APPROVED SGB |

ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY

FILE NAME
 JOB No.
 DATE






PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
 INTERSECTION IMPROVEMENTS**
 DESCHUTES COUNTY

FOR BIDDING REFERENCE ONLY

SIGNING PLAN

DRAWING NO.
 36 OF 43
SS11

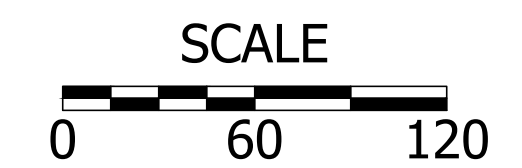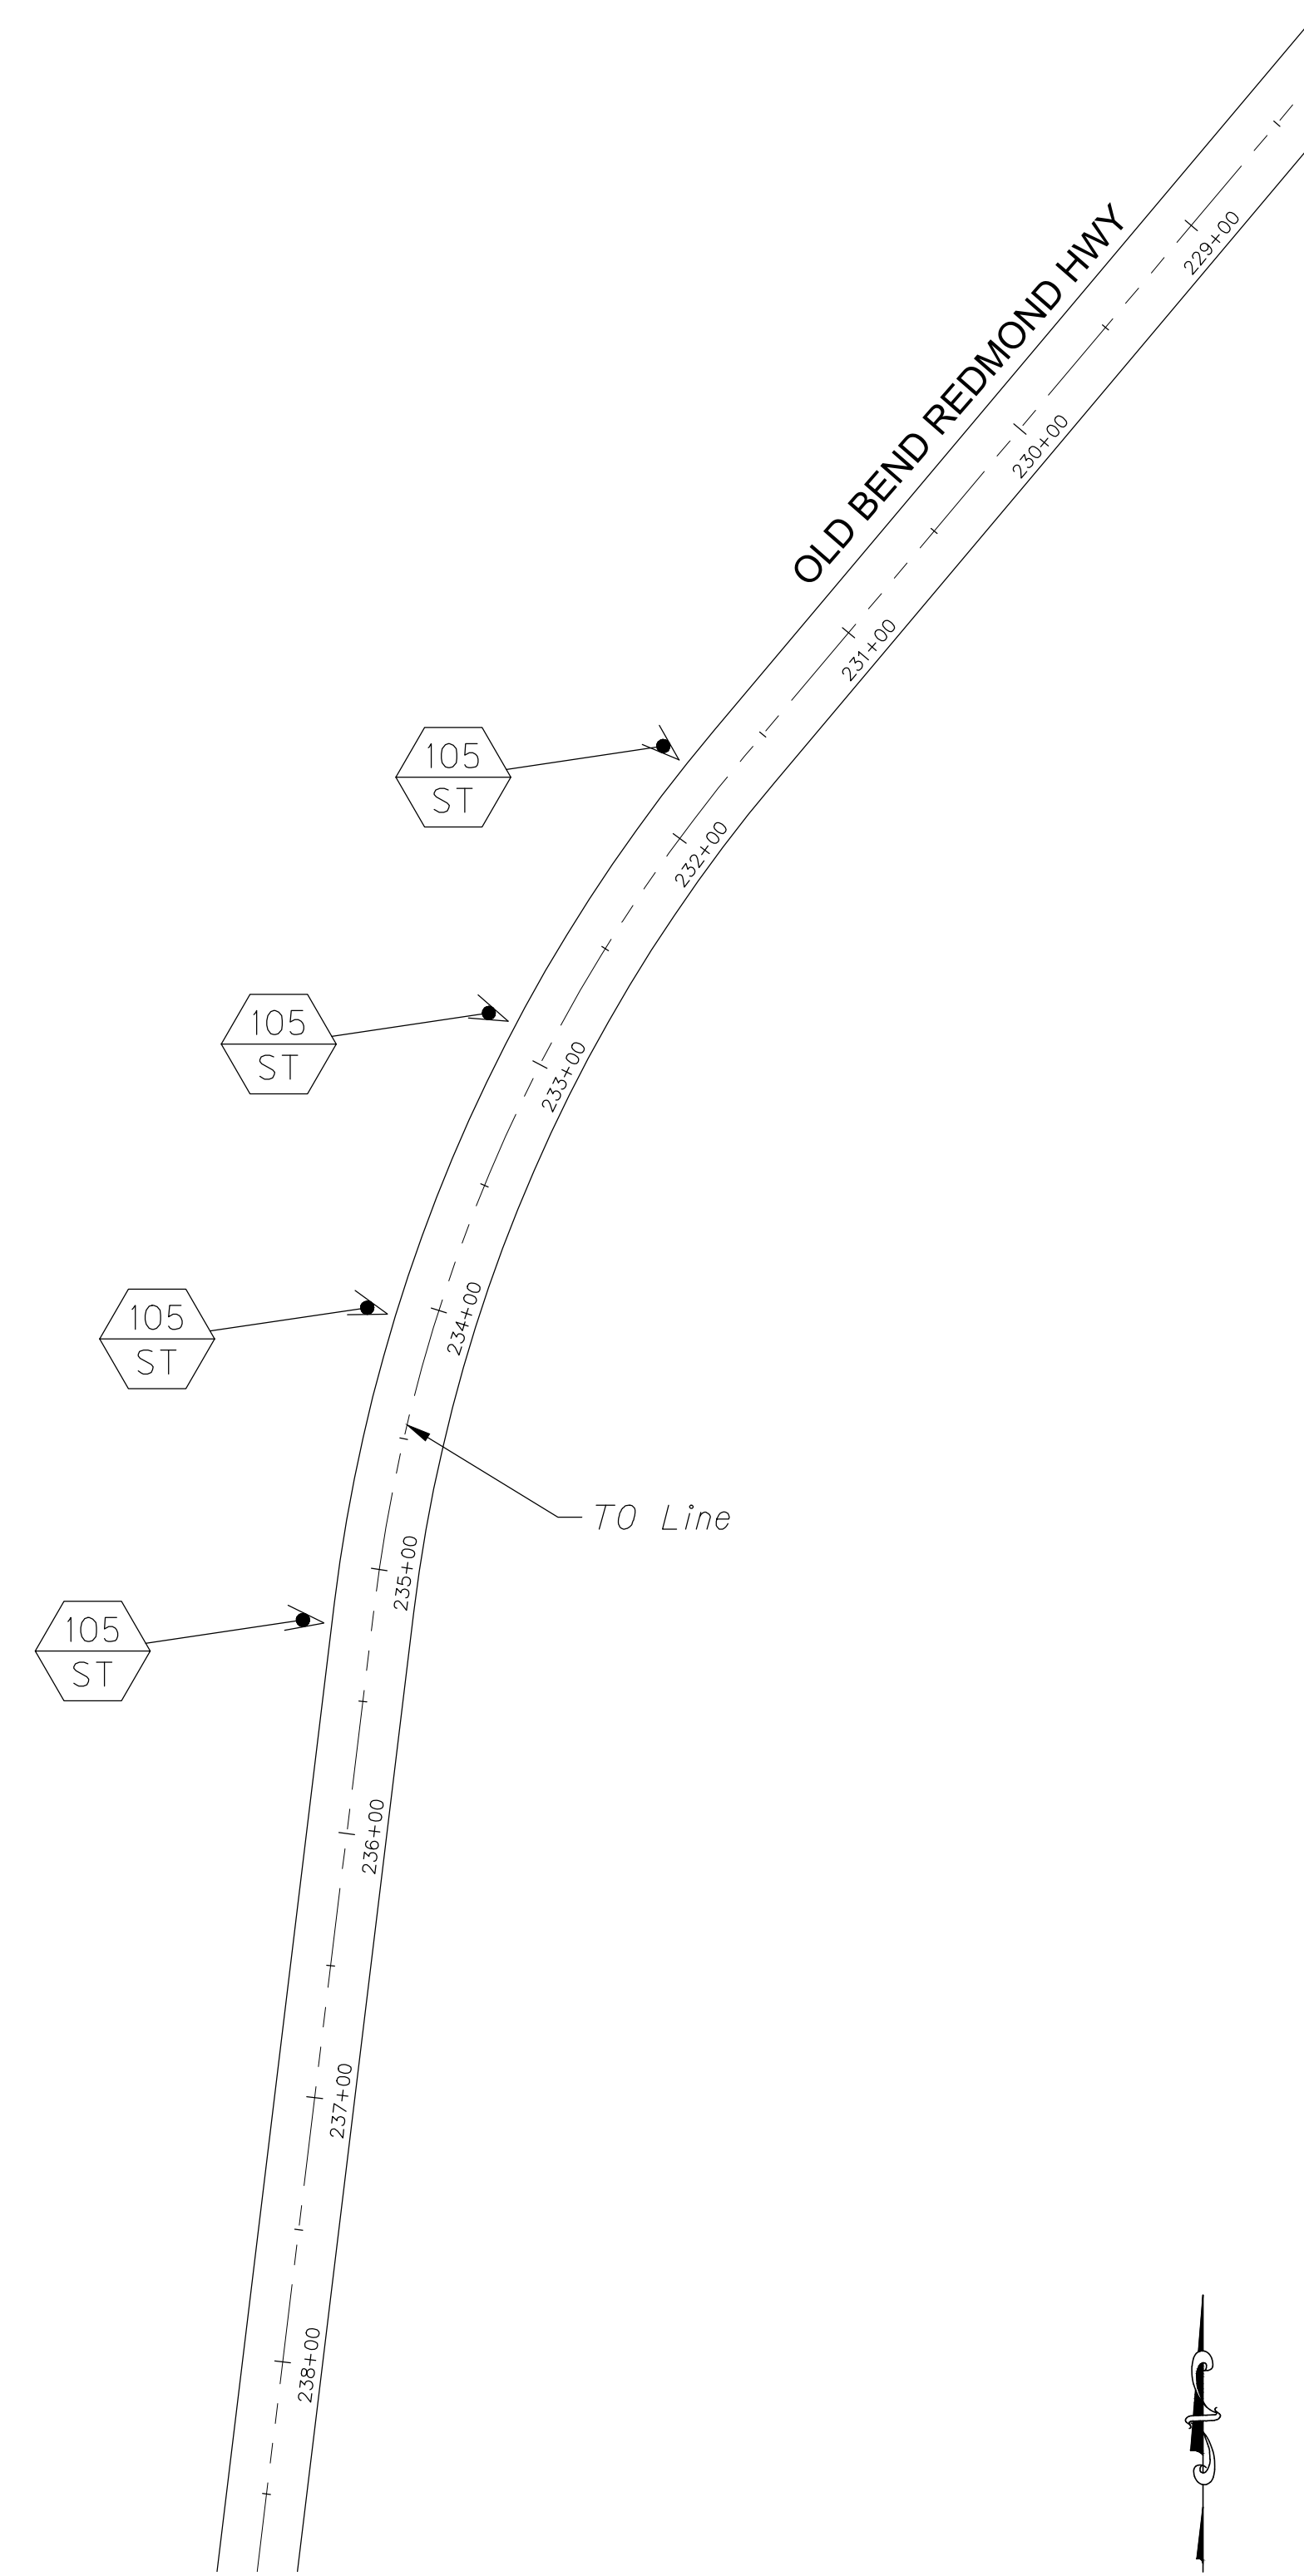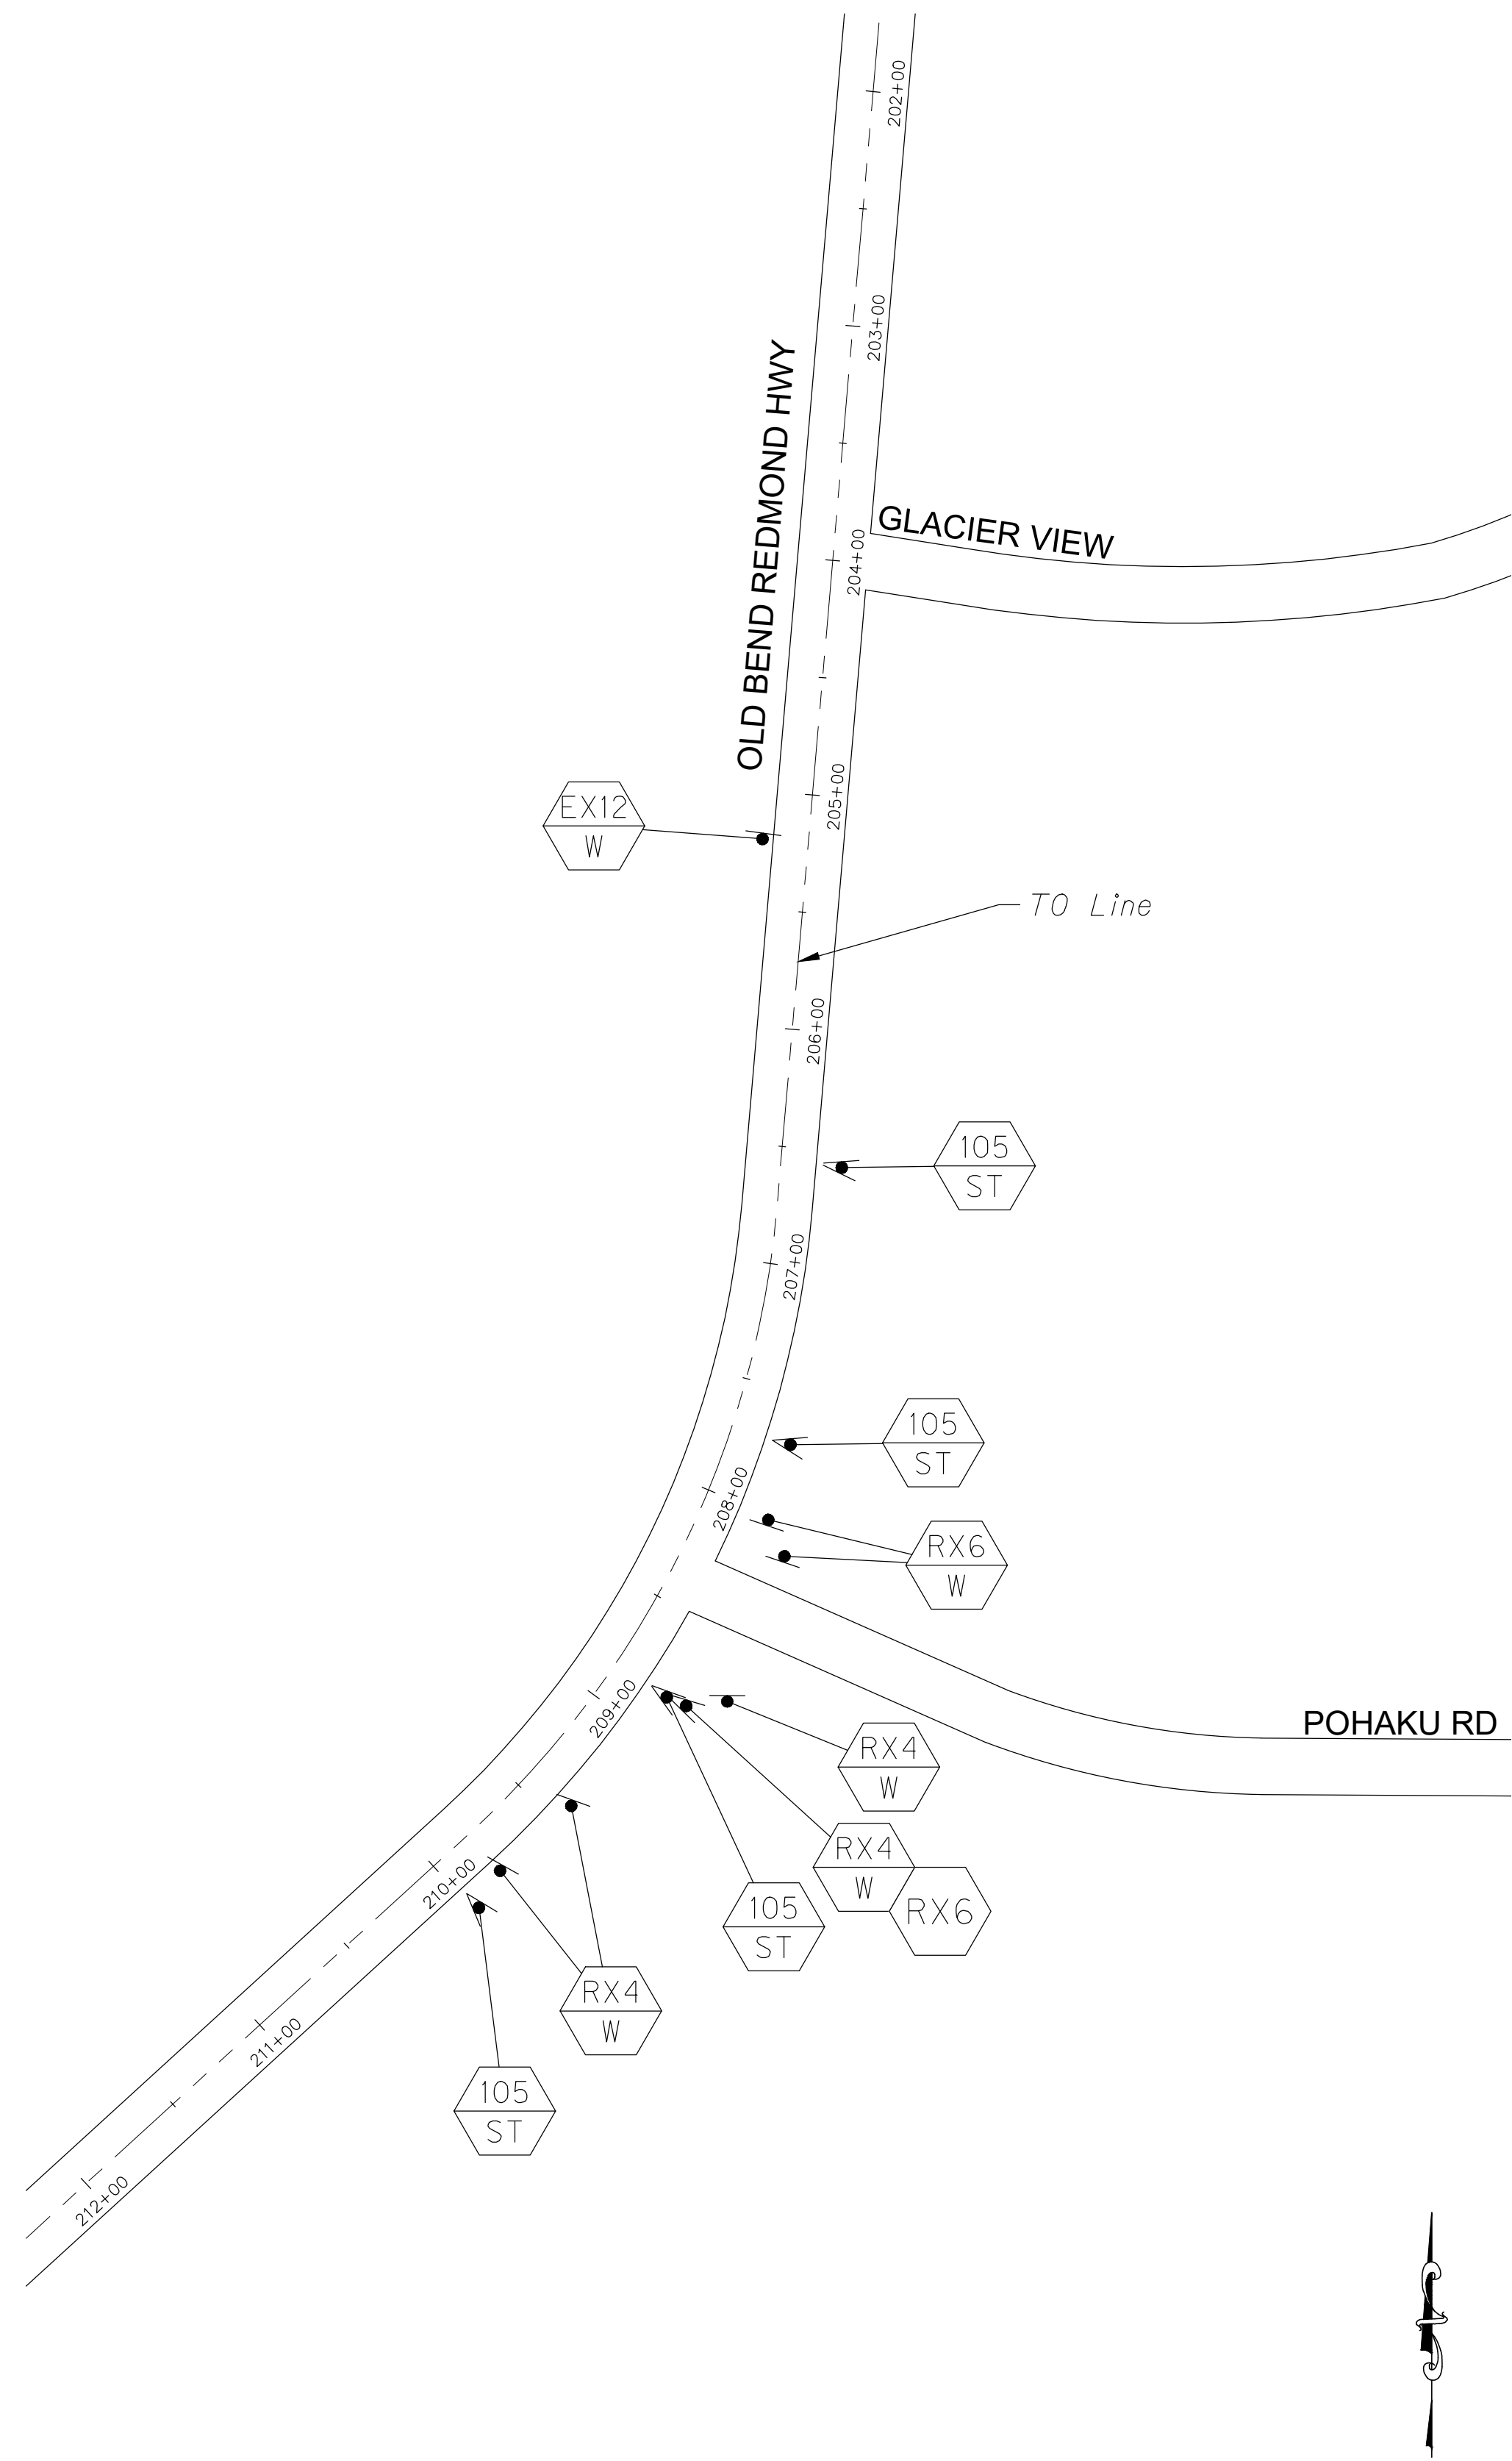

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | DRAWN LTN |
| | | | CHECKED HJS |
| | | | APPROVED SGB |

ONE INCH AT FULL SCALE.
IF NOT, SCALE ACCORDINGLY

FILE NAME: _____

JOB No.: _____





DATE: _____



PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
INTERSECTION IMPROVEMENTS**
DESCHUTES COUNTY

CURVE SIGNING PLAN

DRAWING NO.
37 OF 43
SS12

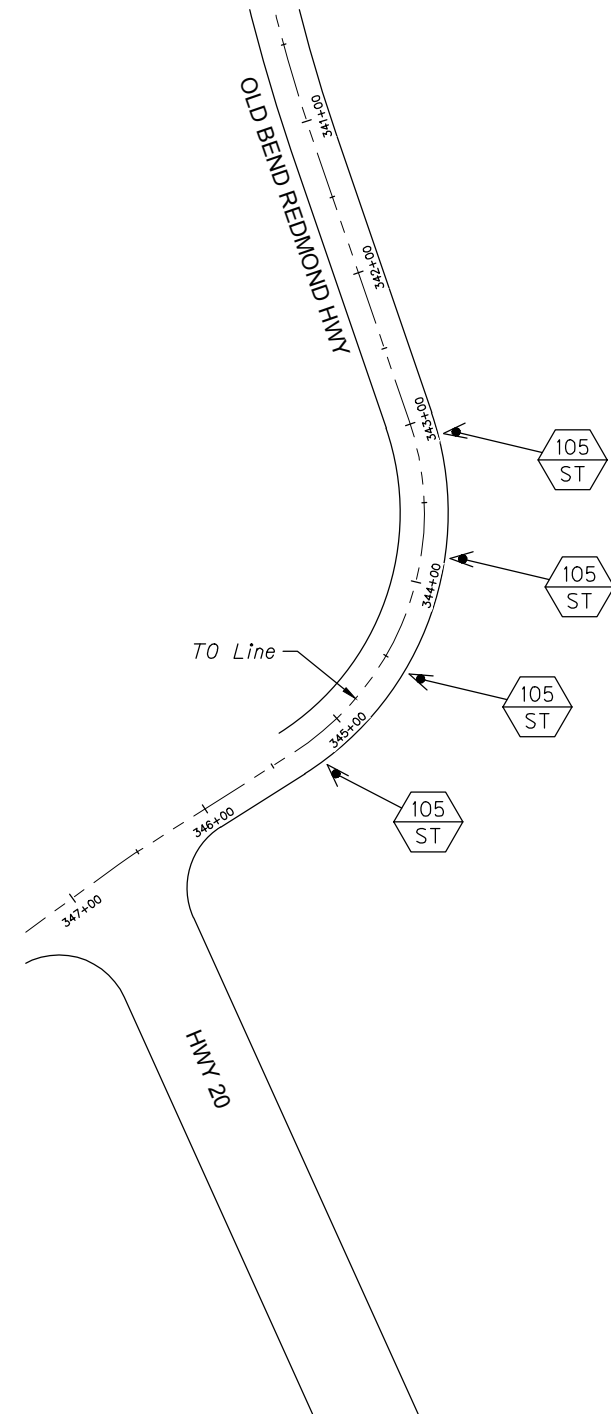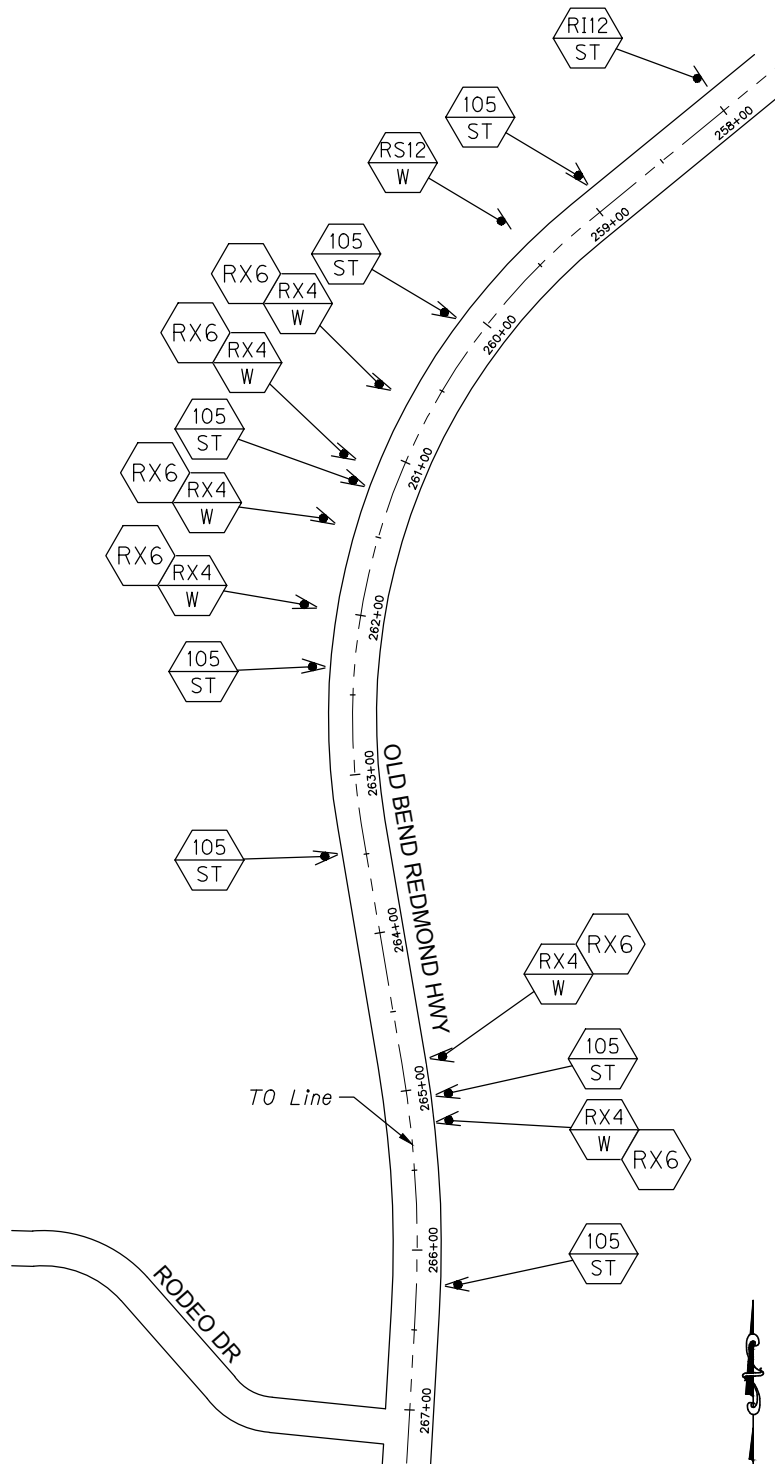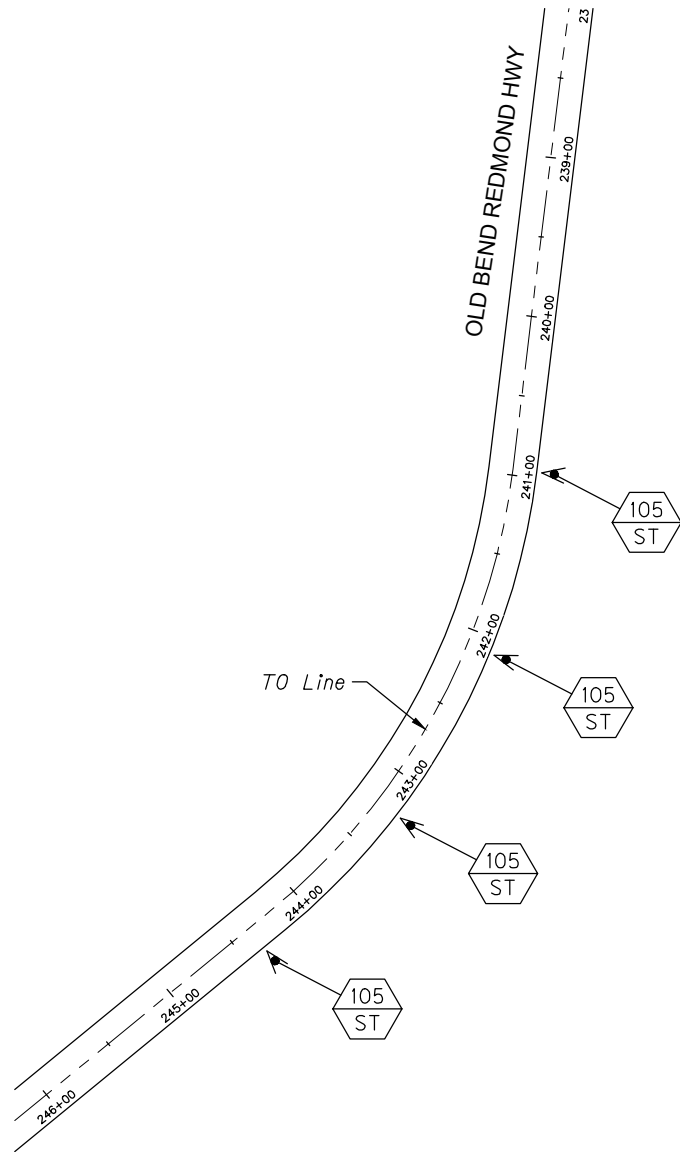

FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | DRAWN LTN |
| | | | CHECKED HJS |
| | | | APPROVED SGB |

ONE INCH AT FULL SCALE.
IF NOT, SCALE ACCORDINGLY

FILE NAME: _____

JOB No.: _____

DATE: _____
















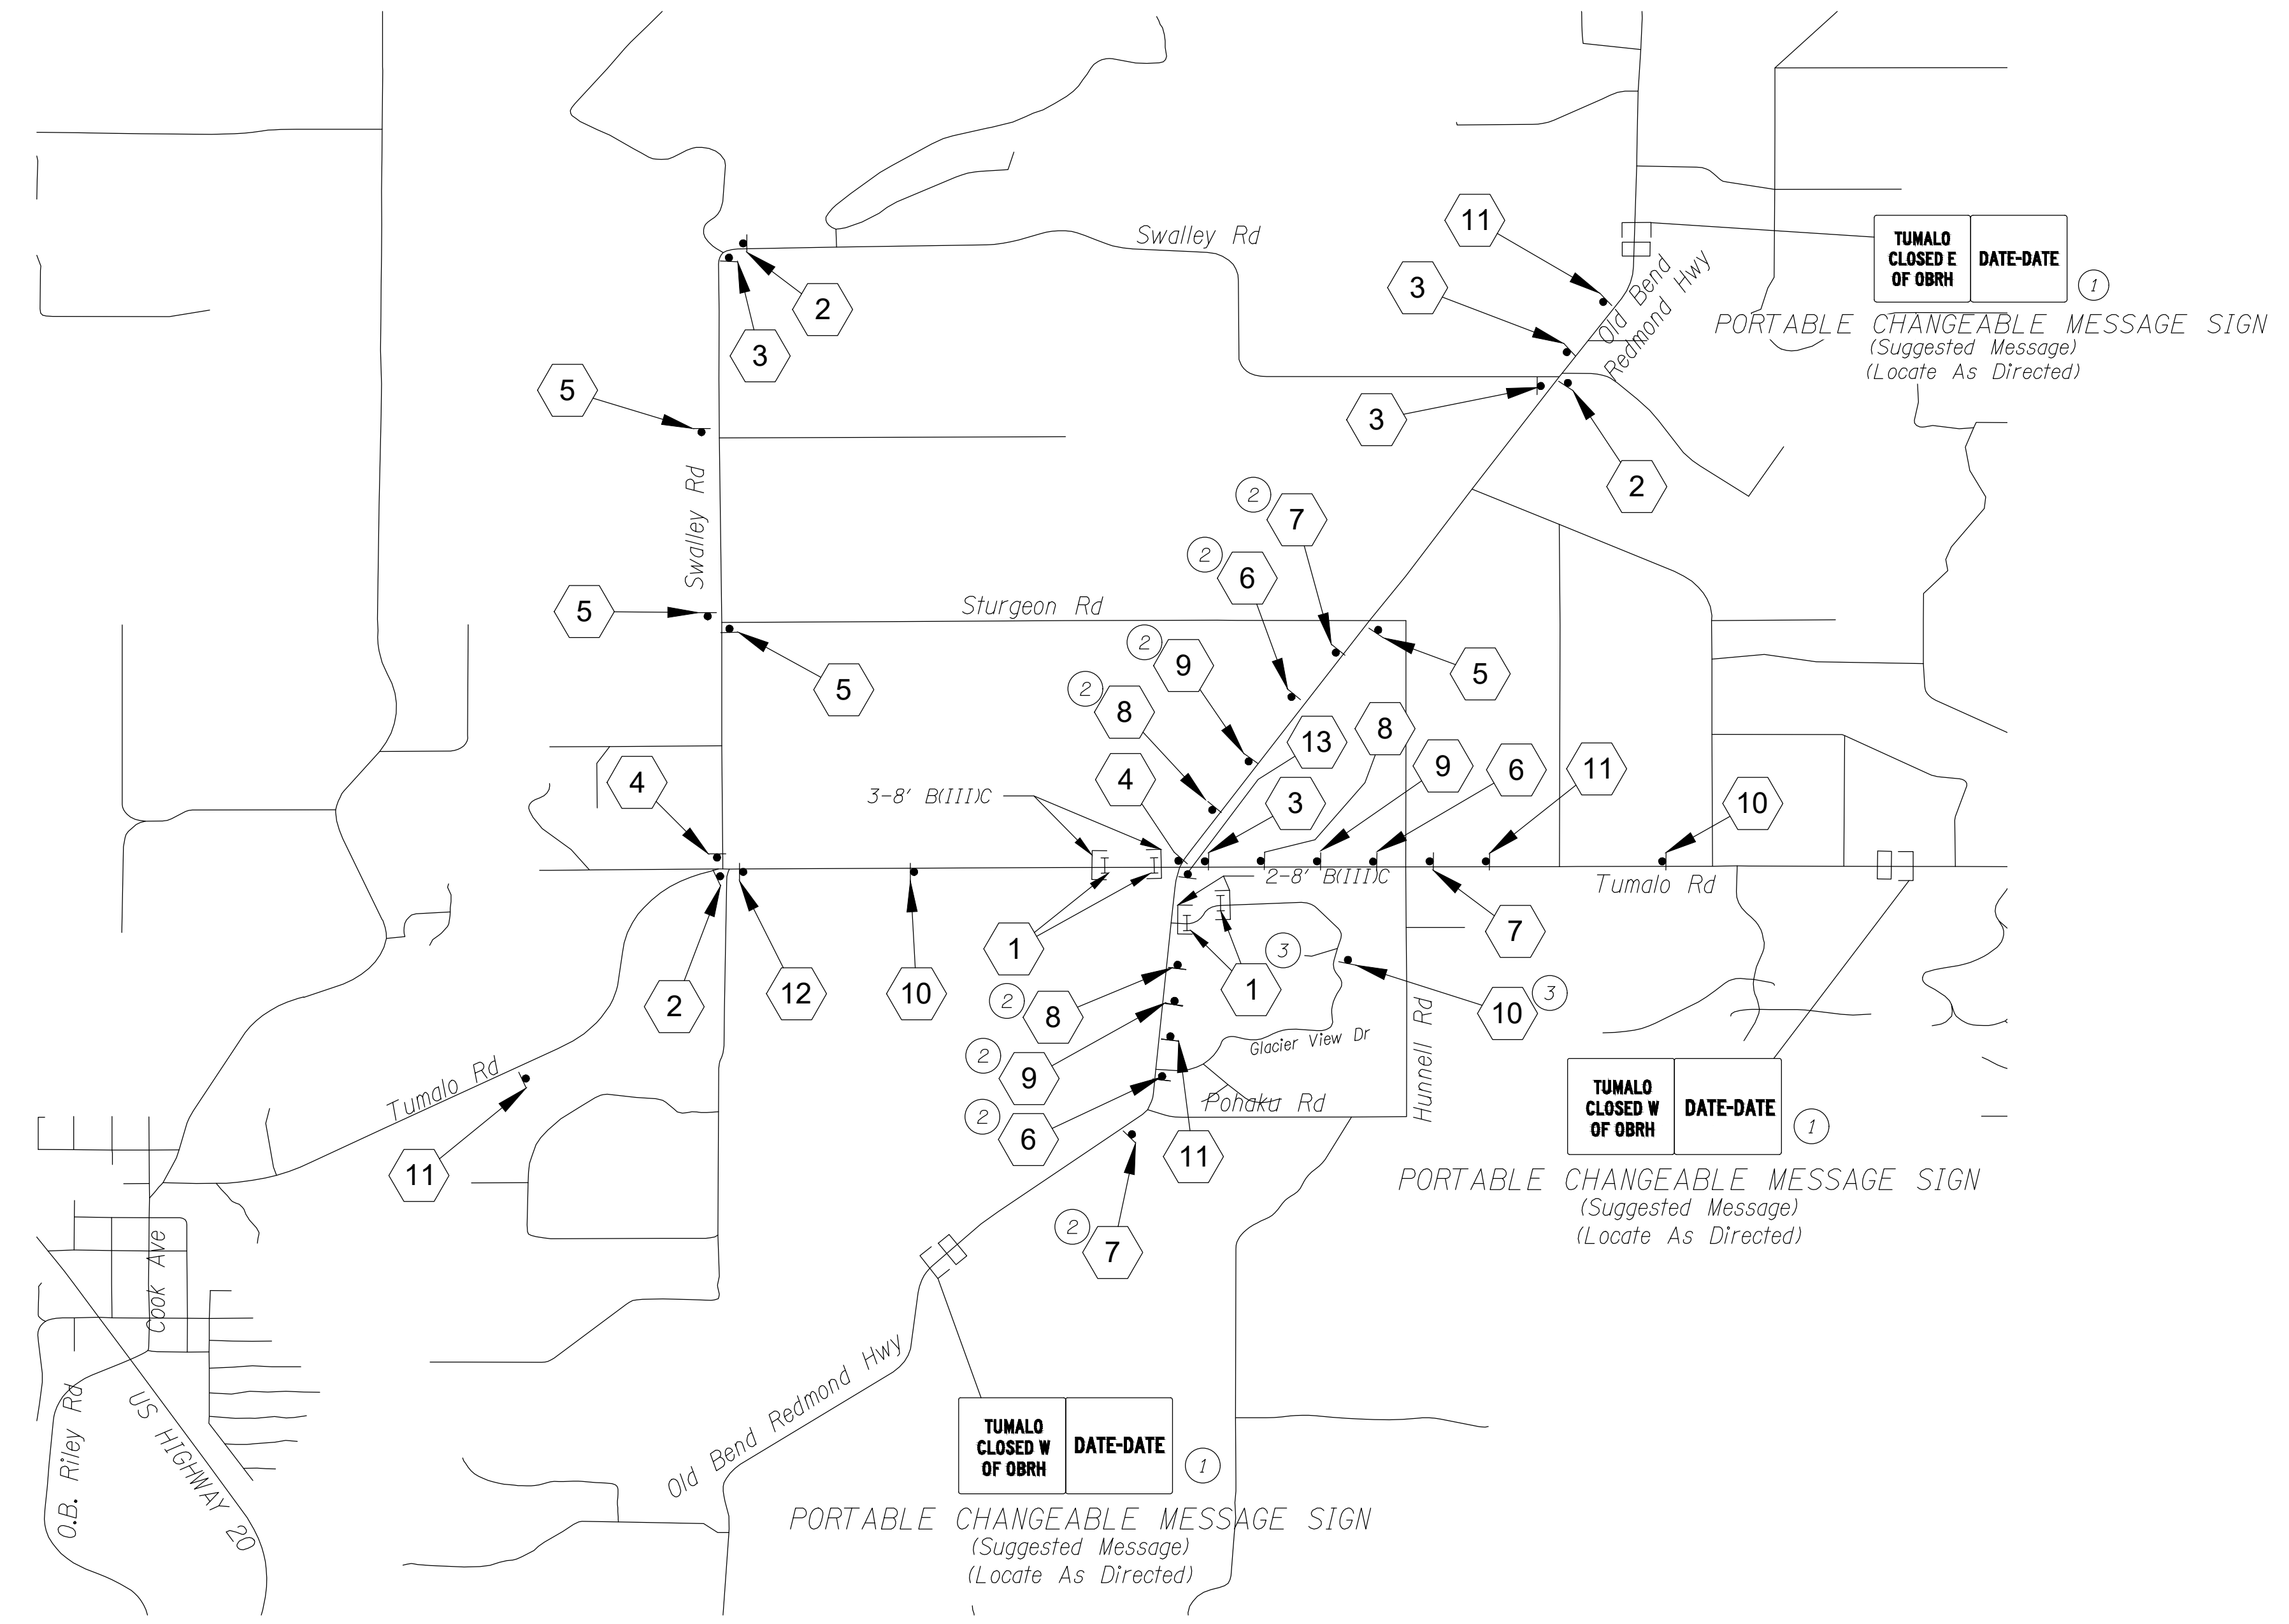
PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
INTERSECTION IMPROVEMENTS**
DESCHUTES COUNTY

CURVE SIGNING PLAN

DRAWING NO.
38 OF 43
SS13

DETOUR PLAN - STAGE 2 & 3
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS

| | | |
|--|---|--|
|  48"x30" ① |  36"x36" ⑦ |  24"x12" 30"x7" 24"x12" 21"x15" ⑬ |
|  24"x12" 30"x7" 21"x15" ② |  36"x36" ⑧ | |
|  24"x12" 30"x7" 21"x15" ③ |  36"x36" ⑨ | |
|  30"x24" ④ |  36"x36" ⑩ | |
|  24"x12" 30"x7" 21"x15" ⑤ |  36"x36" ⑪ | |
|  36"x36" ⑥ |  60"x30" ⑫ | |



GENERAL NOTES

- All sign dimensions listed in inches unless otherwise notes.
- Maintain and protect existing signs.
- Ensure a minimum of 100' spacing between existing and temporary signs.

LEGEND

- Type III Barricade
- I TSS Sign Support As Shown On ODOT Standard Dwg. TM821
- Post Mounted Detour Sign

CONSTRUCTION NOTES

- Portable changeable message signs to remain on project throughout construction and be located as directed.
- Install sign for flagging operations during Stage 3.
- Road closed during Stage 3.



| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | |
| | | | |
| | | | |
| | | | |

| | |
|--|--|
| ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY | |
| FILE NAME | |
| JOB No. | |
| DATE | |





| |
|---|
| PROJECT NAME OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS DESCHUTES COUNTY |
|---|

| |
|-----------------------------------|
| FOR BIDDING REFERENCE ONLY |
| DETOUR PLAN - STAGE 2 & 3 |

| |
|-------------------------|
| DRAWING NO. 39 OF 43 |
| SS14 |

DETOUR PLAN - STAGE 4 & 5
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS

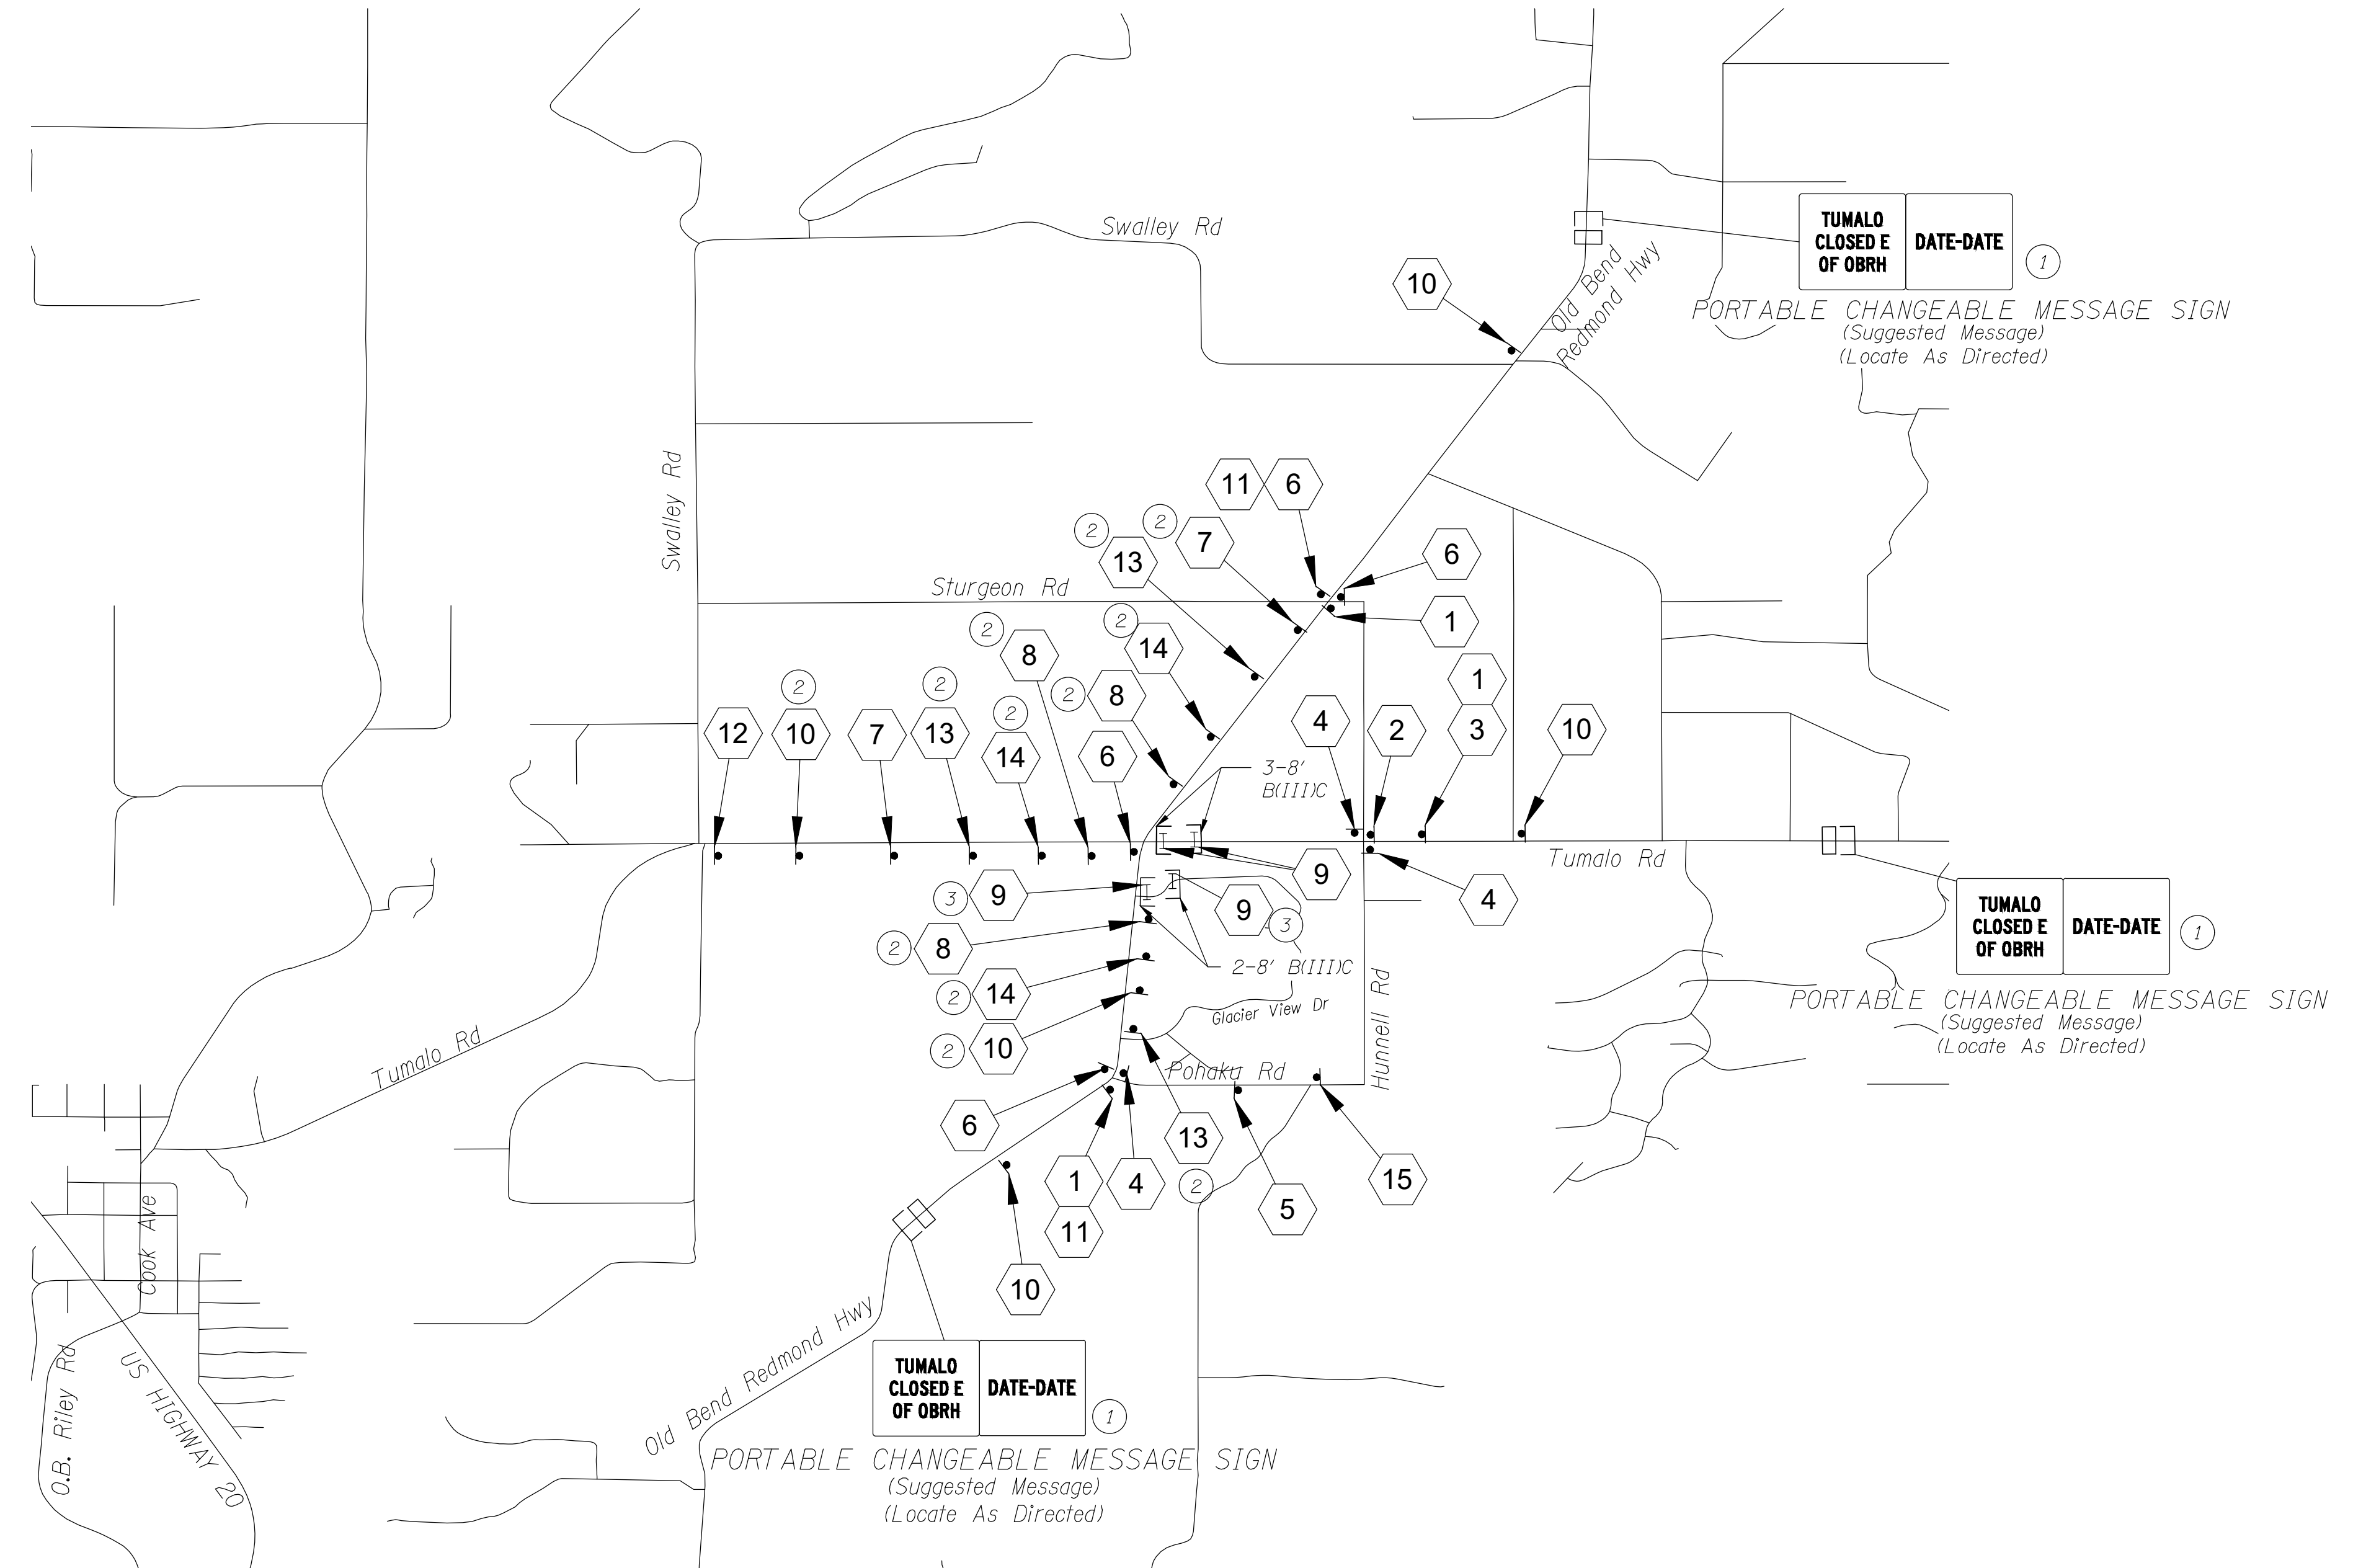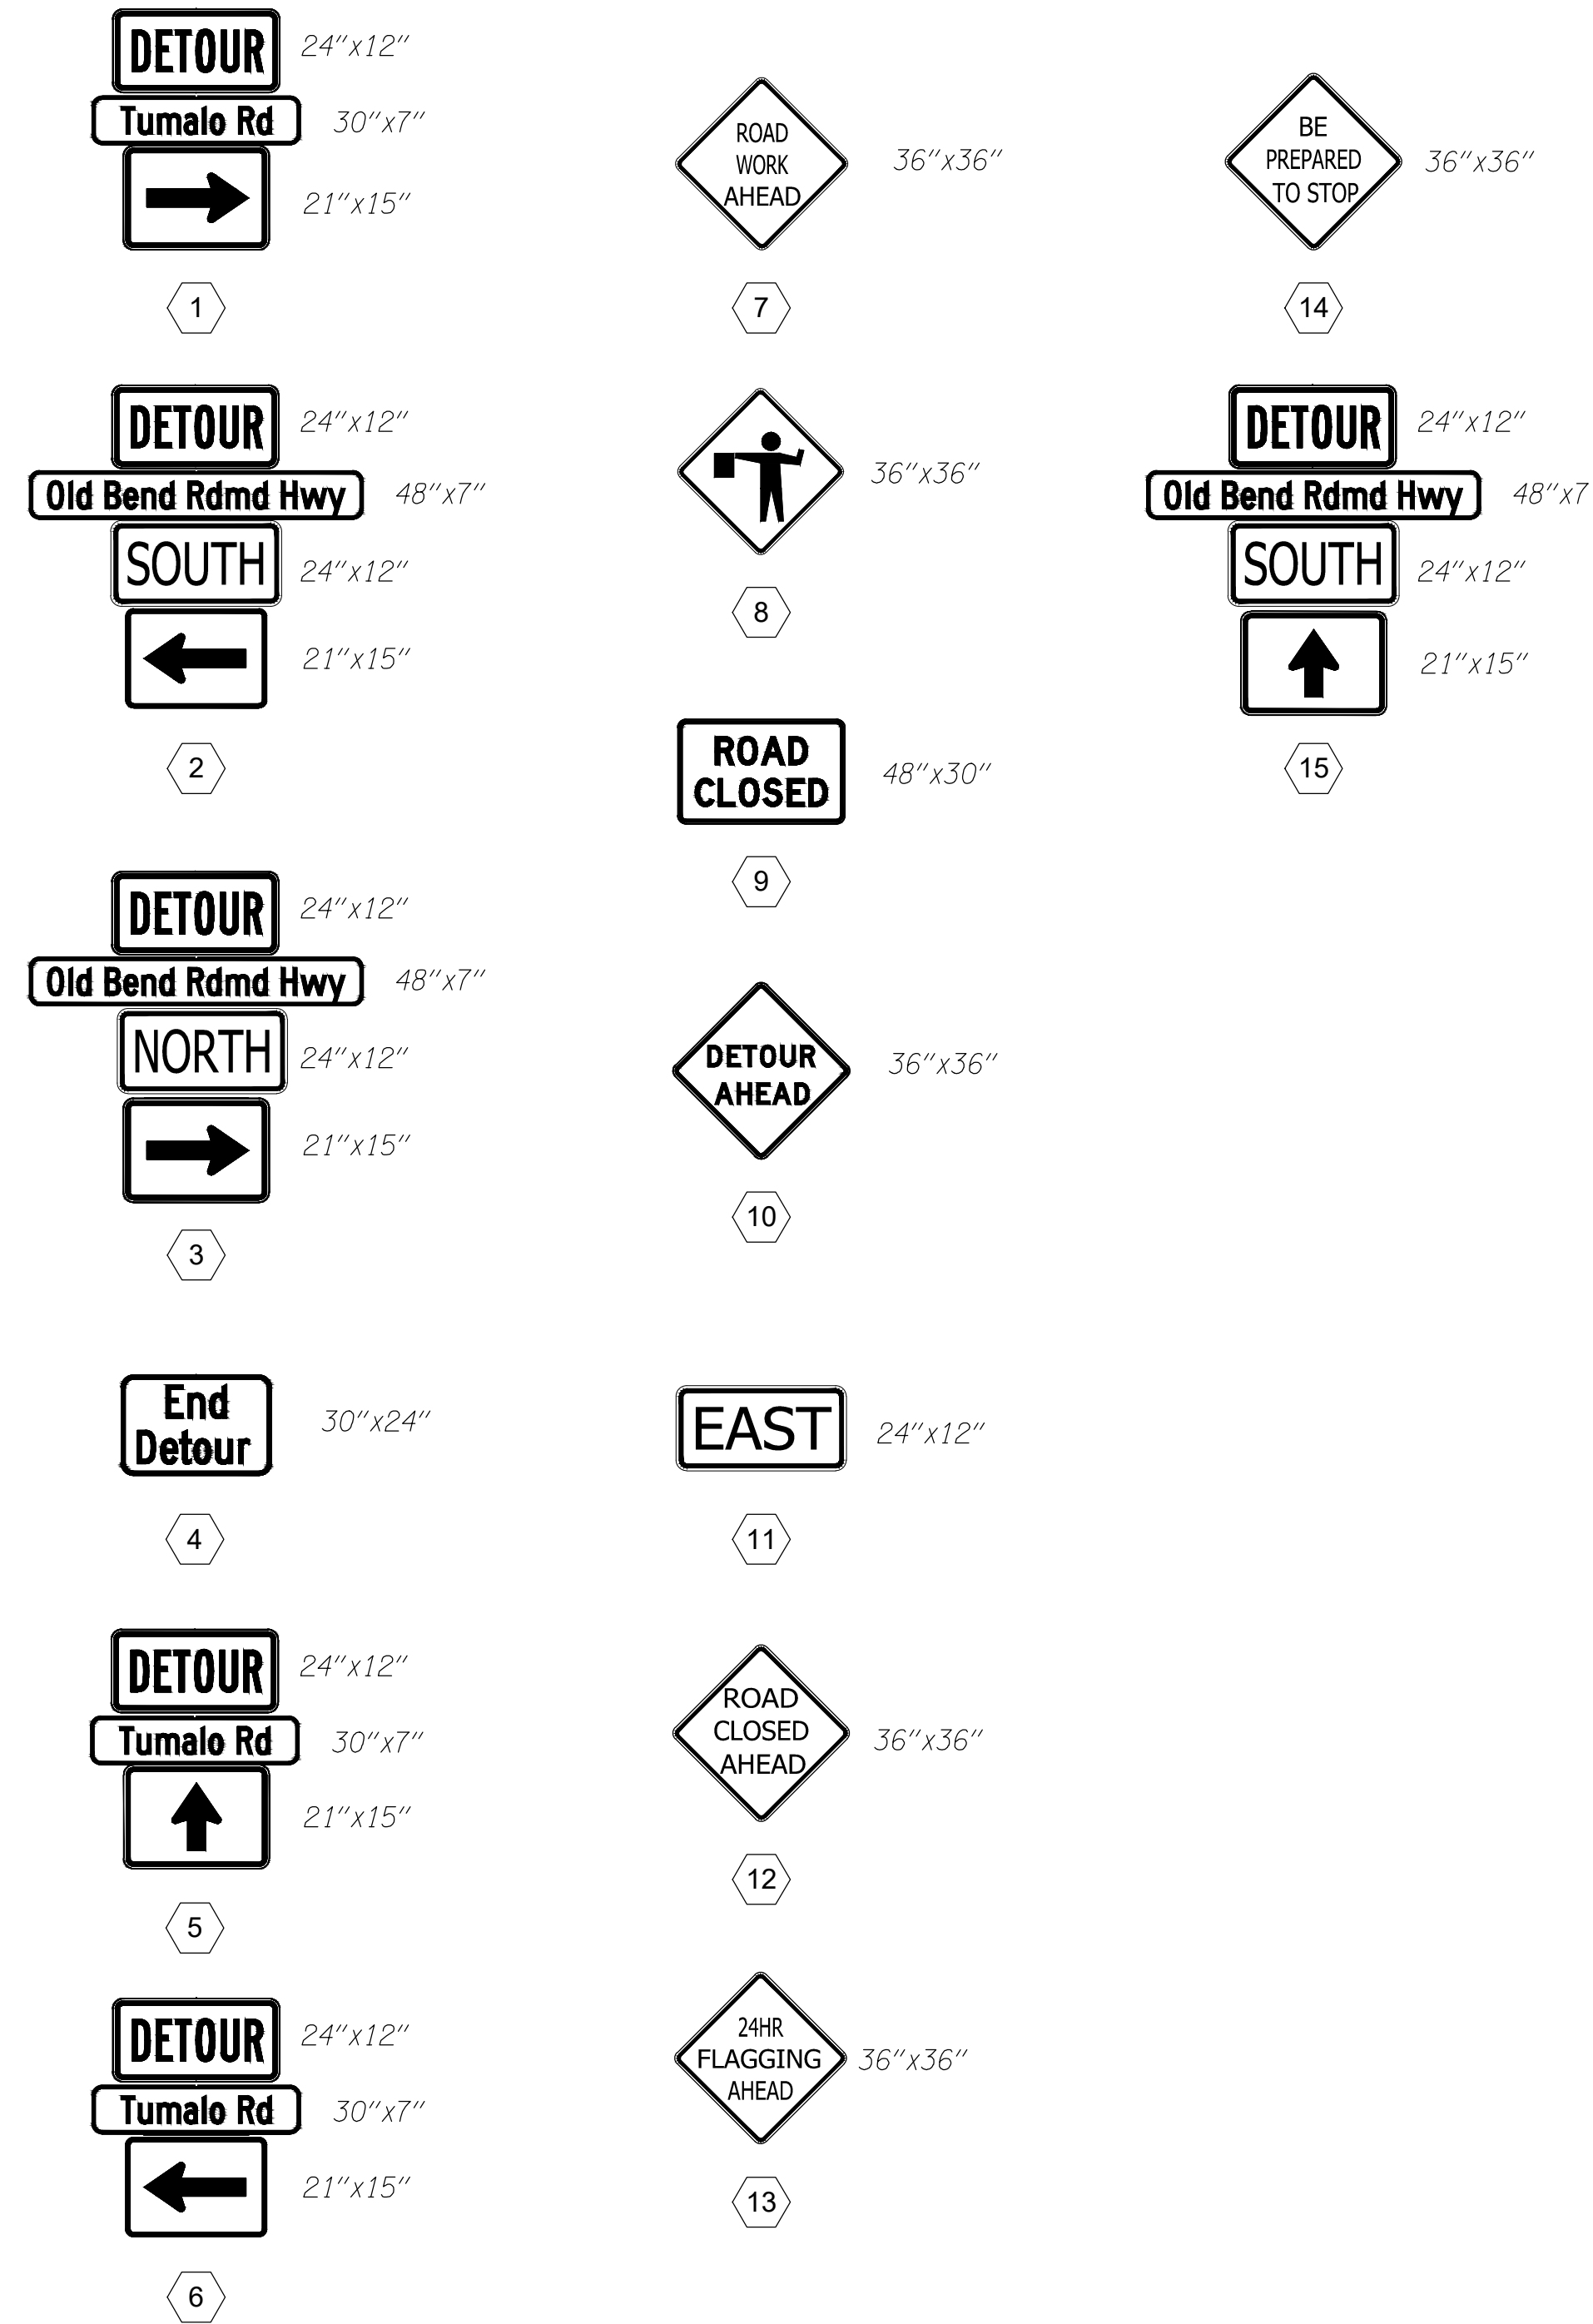

GENERAL NOTES

- All sign dimensions listed in inches unless otherwise notes.
- Maintain and protect existing signs.
- Ensure a minimum of 100' spacing between existing and temporary signs.

LEGEND

- Type III Barricade
- I TSS Sign Support As Shown On ODOT Standard Dwg. TM821
- Post Mounted Detour Sign

CONSTRUCTION NOTES


- Portable changeable message signs to remain on project throughout construction and be located as directed.
- Install sign for flagging operations during Stage 4.
- Road closed during Stage 4.



FOR BIDDING REFERENCE ONLY

| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | LTN |
| | | | DRAWN |
| | | | LTN |
| | | | CHECKED |
| | | | HJS |
| | | | APPROVED |
| | | | SGB |

| | |
|--|--|
| ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY | |
| FILE NAME | |
| JOB No. | |
| DATE | |










| | |
|--------------|---|
| PROJECT NAME | |
| | OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS |
| | DESCHUTES COUNTY |

| | |
|--|---------------------------|
| | DETOUR PLAN - STAGE 4 & 5 |
|--|---------------------------|

| | |
|-------------|----------|
| DRAWING NO. | 40 OF 43 |
| | SS15 |

L E G E N D

-  Install Pacific Power approved street light foundation.
-  Install junction box (pedestal) provided by Pacific Power.
-  Pacific Power to furnish and install new Pacific Power approved street light. Street light pole shall be Valmont anchor base aluminum alloy light pole Model No. 270B45806T4/2MA0832b45 and street light shall be American Electric Model: ATB0 30BLEDE13 MVOLT R3 3K.
-  Light pole number (XX), see "Street Light Pole Schedule".
-  Install poly pull line (500# minimum strength).
-  Install (S) inch electrical grade sch 40 pvc conduit.
-  Power source for 120/240 volt, single phase.

ILLUMINATION LEGEND
OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS

GENERAL NOTES

1. All illumination related work other than pole foundation shall be paid for at the contract price for "Switching, conduit, and wiring - Lump Sum."
2. Foundations, junction boxes, and conduit shall be installed at locations shown on plans. If conflicts arise, foundation, junction box, and conduit locations may be modified in the field per engineer's approval. All lighting equipment must be placed within the right-of-way. Place conduit in same trench as other conduits whenever possible.
3. Location of all existing utilities shall be verified prior to beginning any work. Coordinate all work with utility companies to eliminate conflicts.
4. All proposed street lighting junction boxes, conduits, pull ropes, and concrete foundations shall be installed by contractor per Pacific Power requirements. Refer to Pacific Power 2011 Electric Service Requirements, 2nd Edition.
5. All street light poles, luminaire arms, luminaires, lamps, and wiring shall be furnished and installed by Pacific Power. All junction boxes shall be furnished by Pacific Power and installed by the contractor.
6. Final light pole location(s) shall be approved in the field by the engineer prior to foundation installation.
7. This illumination plans set is accompanied by Oregon Standard Drawing TM472.
8. All conduit elbows shall be factory made and be long radius 36". For conduit runs longer than 150' or containing more than 270 degrees of bends, elbows shall be fiberglass.
9. Contractor to coordinate with Pacific Power ten (10) business days in advance of commencing illumination work. Contact Ryan Coburn at (541) 388-7129.
10. All conduit runs shall be approved by Pacific Power before backfill.
11. Cover and protect all new light pole foundations.

STREET LIGHT POLE SCHEDULE

| POLE NO. | STREET | STATION | OFFSET* | LUMINAIRE ARM LENGTH (FT) | LAMP | LUMINAIRE MOUNTING HEIGHT (FT) | TYPE | NOTES |
|----------|----------------------|-----------|----------|---------------------------|------|--------------------------------|------|-----------|
| 1 | Tumalo Rd | 100+34.44 | 20.7' LT | 8' | LED | 25' | III | 126 Watts |
| 2 | Tumalo Rd | 101+53.41 | 23.3' LT | 8' | LED | 25' | III | 126 Watts |
| 3 | Tumalo Rd | 102+78.55 | 26.0' LT | 8' | LED | 25' | III | 126 Watts |
| 4 | Tumalo Rd | 103+98.37 | 29.5' RT | 8' | LED | 25' | III | 126 Watts |
| 5 | Tumalo Rd | 104+51.72 | 41.6' LT | 8' | LED | 25' | III | 126 Watts |
| 6 | Tumalo Rd | 104+84.35 | 83.1' RT | 8' | LED | 25' | III | 126 Watts |
| 7 | Tumalo Rd | 105+89.06 | 82.1' LT | 8' | LED | 25' | III | 126 Watts |
| 8 | Tumalo Rd | 106+14.35 | 44.9' RT | 8' | LED | 25' | III | 126 Watts |
| 9 | Tumalo Rd | 106+81.75 | 28.0' LT | 8' | LED | 25' | III | 126 Watts |
| 10 | Tumalo Rd | 107+97.78 | 24.8' LT | 8' | LED | 25' | III | 126 Watts |
| 11 | Tumalo Rd | 109+20.84 | 21.8' LT | 8' | LED | 25' | III | 126 Watts |
| 12 | Old Bend Redmond Hwy | 202+68.00 | 20.8' RT | 8' | LED | 25' | III | 126 Watts |
| 13 | Old Bend Redmond Hwy | 203+67.57 | 19.8' RT | 8' | LED | 25' | III | 126 Watts |
| 14 | Old Bend Redmond Hwy | 204+78.07 | 22.0' RT | 8' | LED | 25' | III | 126 Watts |
| 15 | Old Bend Redmond Hwy | 205+96.55 | 26.7' RT | 8' | LED | 25' | III | 126 Watts |
| 16 | Old Bend Redmond Hwy | 207+19.78 | 28.1' RT | 8' | LED | 25' | III | 126 Watts |
| 17 | Old Bend Redmond Hwy | 208+39.34 | 34.8' RT | 8' | LED | 25' | III | 126 Watts |
| 18 | Old Bend Redmond Hwy | 210+70.52 | 35.9' LT | 8' | LED | 25' | III | 126 Watts |
| 19 | Old Bend Redmond Hwy | 211+97.76 | 25.6' LT | 8' | LED | 25' | III | 126 Watts |
| 20 | Old Bend Redmond Hwy | 213+14.65 | 23.6' LT | 8' | LED | 25' | III | 126 Watts |
| 21 | Old Bend Redmond Hwy | 214+28.73 | 22.3' LT | 8' | LED | 25' | III | 126 Watts |
| 22 | Old Bend Redmond Hwy | 215+40.57 | 21.7' LT | 8' | LED | 25' | III | 126 Watts |

* - Offset measured from roadway centerline.

INTERSECTION LIGHT LEVEL SUMMARY

| INTERSECTION | CLASSIFICATION | | LIGHT LEVEL | UNIFORMITY | LIGHT LOSS FACTOR | BUG RATING |
|--|---------------------------|--------|-------------|------------|-------------------|------------|
| Tumalo Rd at Old Bend Redmond Hwy Roundabout | Collector/ Minor Arterial | Target | ≥ 1.4 fc | ≤ 3 : 1 | 0.85 | B2 U0 G2 |
| | | Design | 1.7 fc | 2.8 : 1 | | |

ROADWAY LIGHT LEVEL SUMMARY

| ROADWAY | CLASSIFICATION, PEDESTRIAN CONFLICT | | LIGHT LEVEL | AVERAGE UNIFORMITY | LIGHT LOSS FACTOR | BUG RATING |
|--------------------------------|-------------------------------------|--------|-------------|--------------------|-------------------|------------|
| Tumalo Rd - East Leg | Collector, Low | Target | ≥ 0.6 fc | ≤ 5.5 : 1 | 0.85 | B2 U0 G2 |
| | | Design | 1.6 fc | 3.1 : 1 | | |
| Tumalo Rd - West Leg | Collector, Low | Target | ≥ 0.6 fc | ≤ 5.5 : 1 | 0.85 | B2 U0 G2 |
| | | Design | 1.6 c | 2.6 : 1 | | |
| Old Bend Redmond Hwy-North Leg | Minor Arterial, Low | Target | ≥ 0.8 fc | ≤ 5 : 1 | 0.85 | B2 U0 G2 |
| | | Design | 1.6 fc | 2.7 : 1 | | |
| Old Bend Redmond Hwy-South Leg | Minor Arterial, Low | Target | ≥ 0.8 fc | ≤ 5 : 1 | 0.85 | B2 U0 G2 |
| | | Design | 1.6 fc | 2.6 : 1 | | |


| REVISIONS | DATE | BY | DESIGNED |
|-----------|------|----|----------|
| | | | LTN |
| | | | DRAWN |
| | | | LTN |
| | | | CHECKED |
| | | | HJS |
| | | | APPROVED |
| | | | SGB |

ONE INCH AT FULL SCALE. IF NOT, SCALE ACCORDINGLY

FILE NAME: _____

JOB No.: _____

DATE: _____

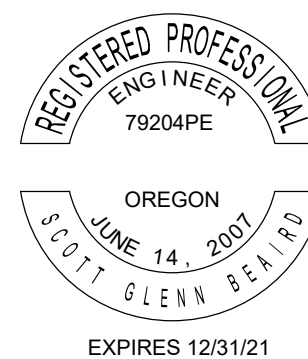

PROJECT NAME
OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS
DESCHUTES COUNTY



FOR BIDDING REFERENCE ONLY

ILLUMINATION LEGEND

DRAWING NO.
41 OF 43

IL1

ILLUMINATION PLAN
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS

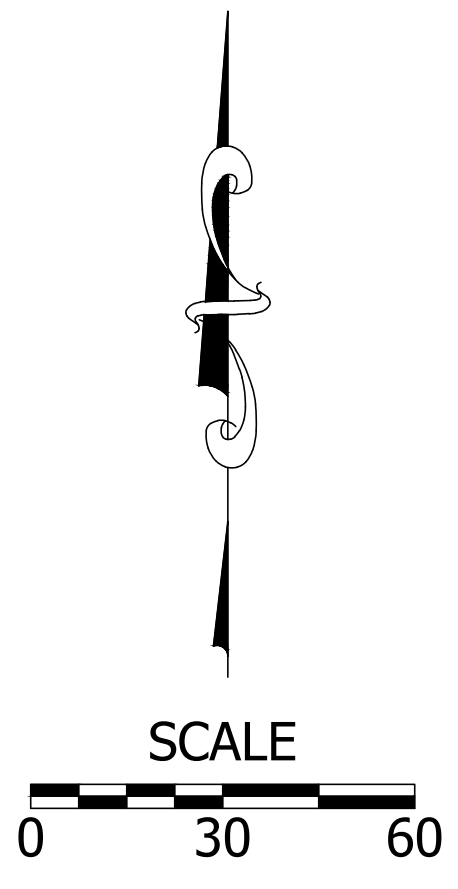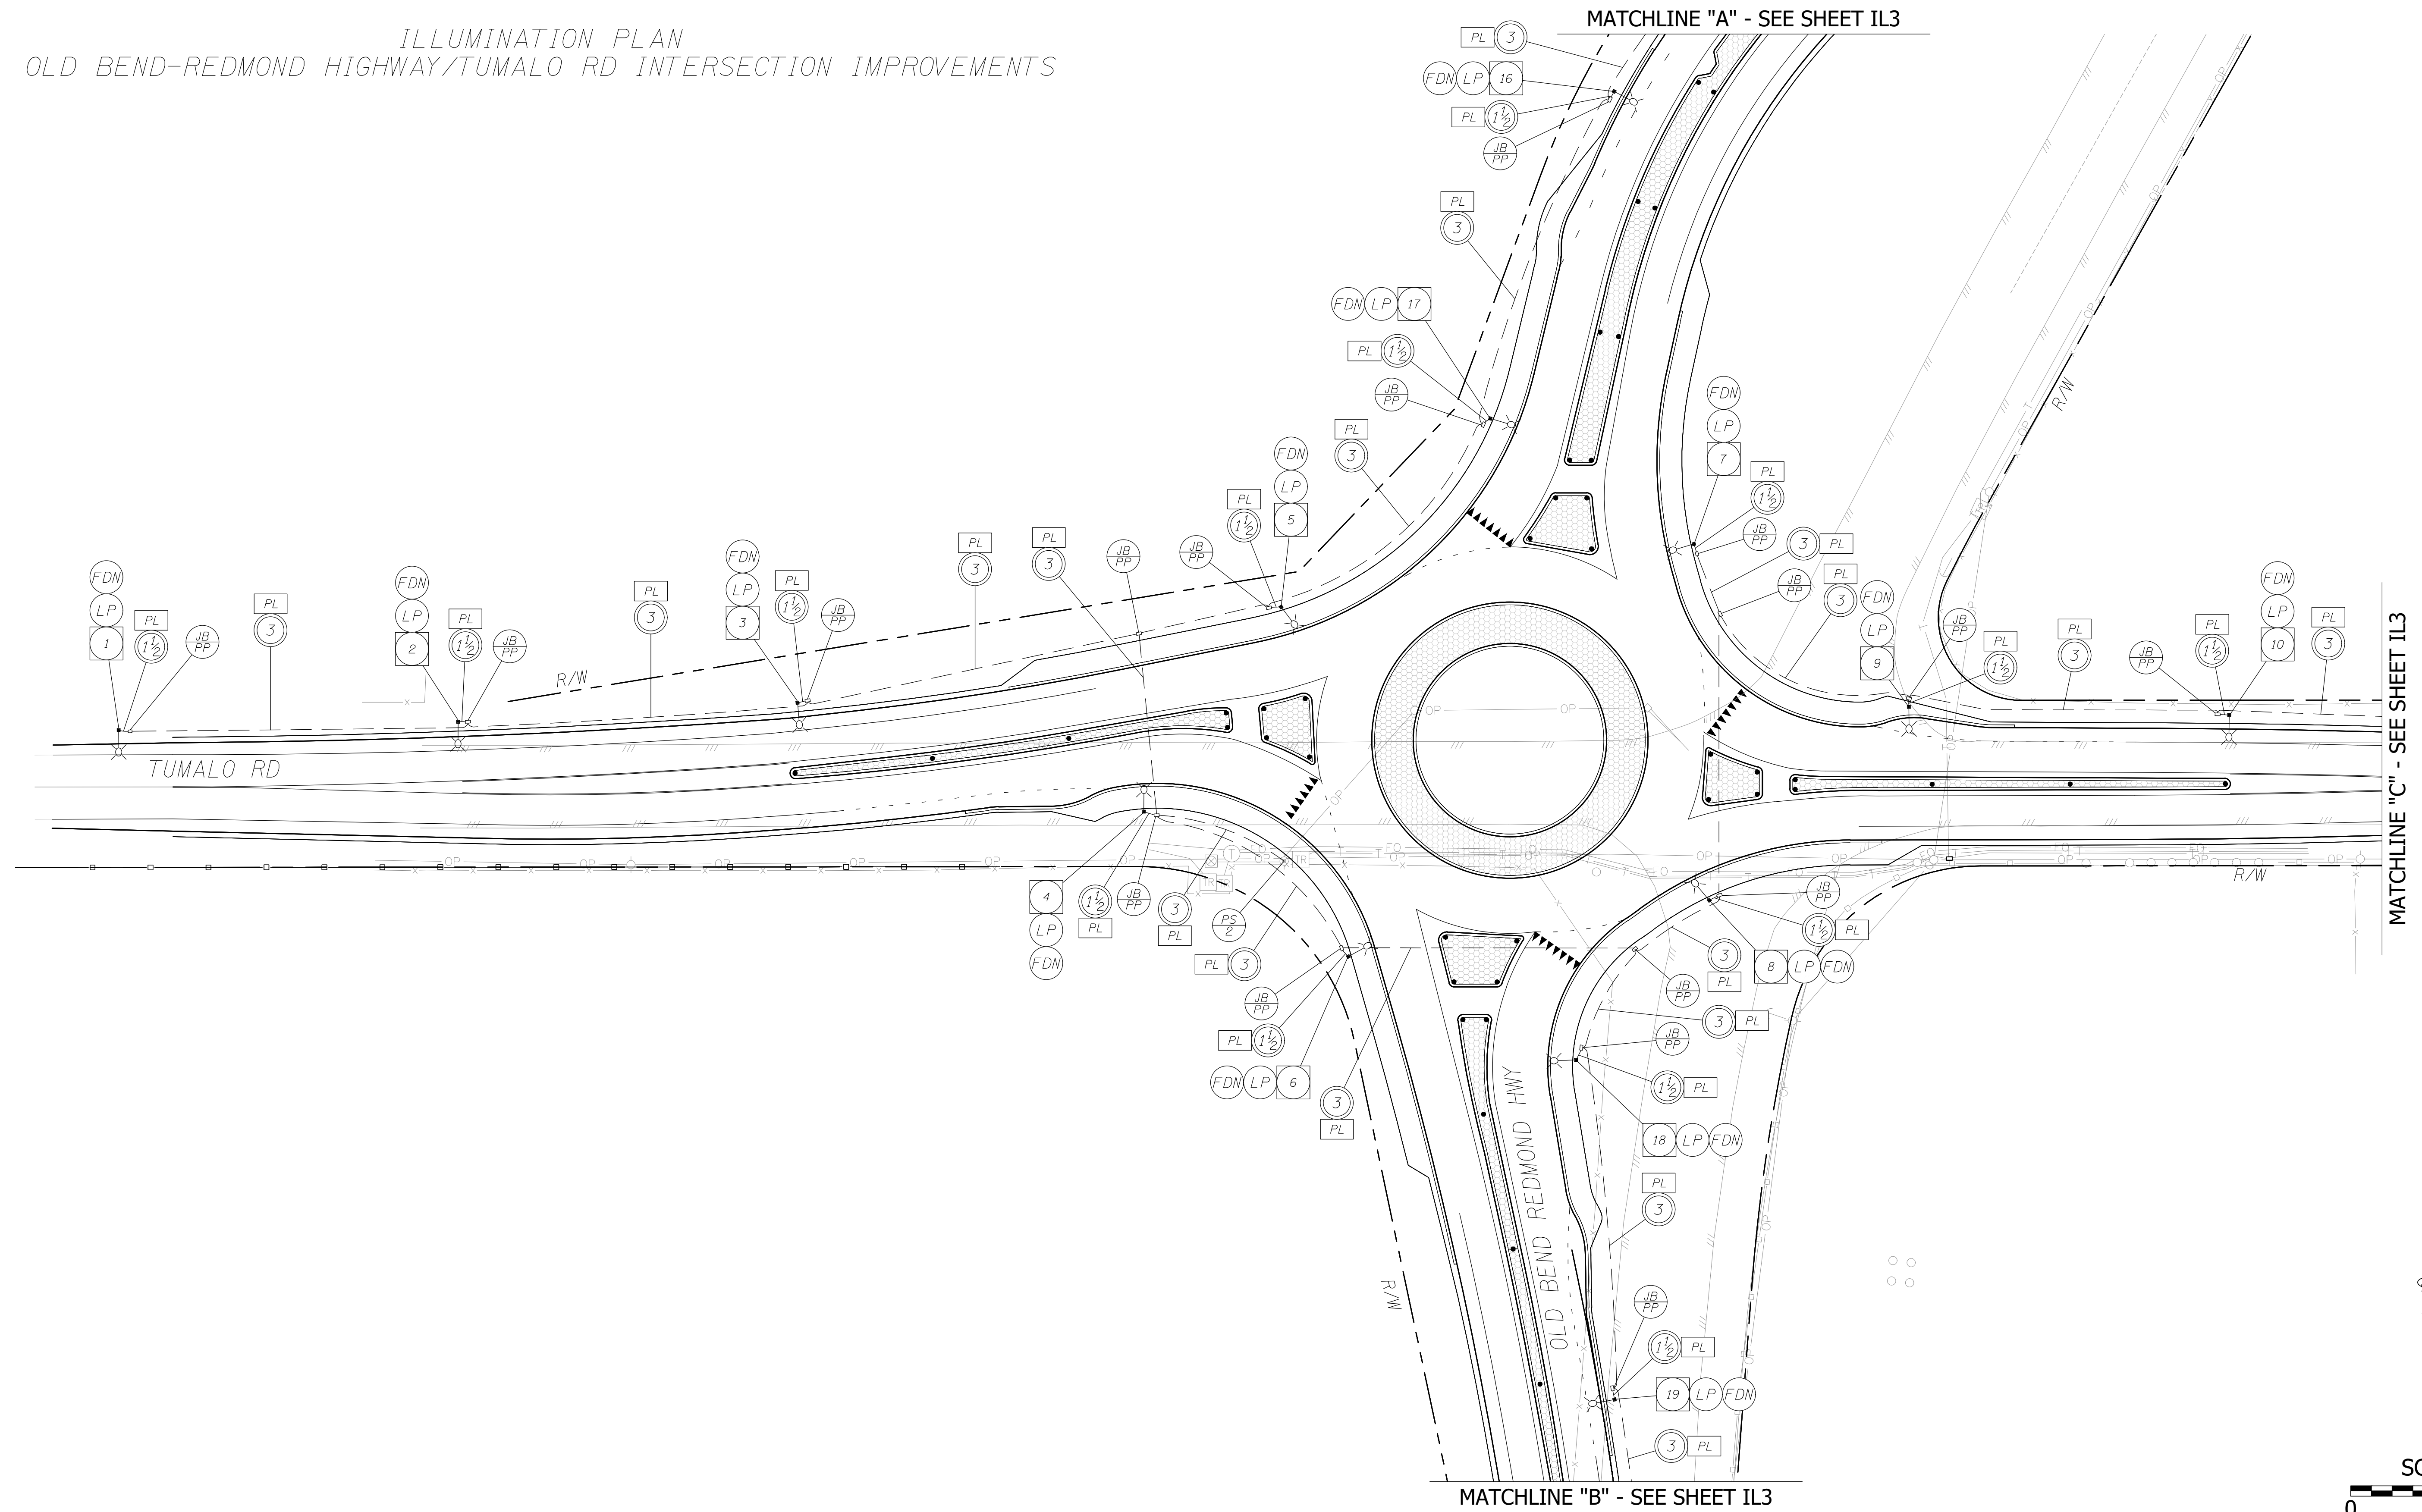

| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | DRAWN LTN |
| | | | CHECKED HJS |
| | | | APPROVED SGB |

ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY

FILE NAME
 JOB No.
 DATE



PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
 INTERSECTION IMPROVEMENTS**
 DESCHUTES COUNTY





FOR BIDDING REFERENCE ONLY

ILLUMINATION PLAN

DRAWING NO.
 42 OF 43

IL2

ILLUMINATION PLAN
 OLD BEND-REDMOND HIGHWAY/TUMALO RD INTERSECTION IMPROVEMENTS

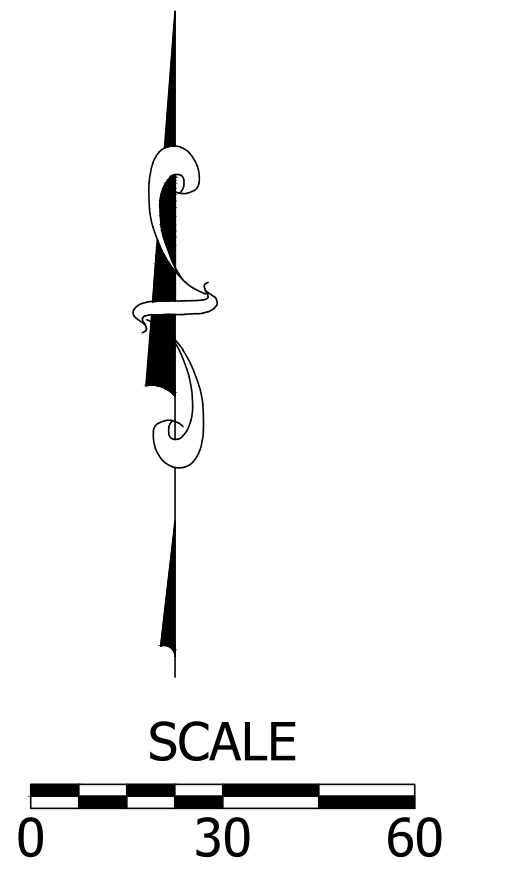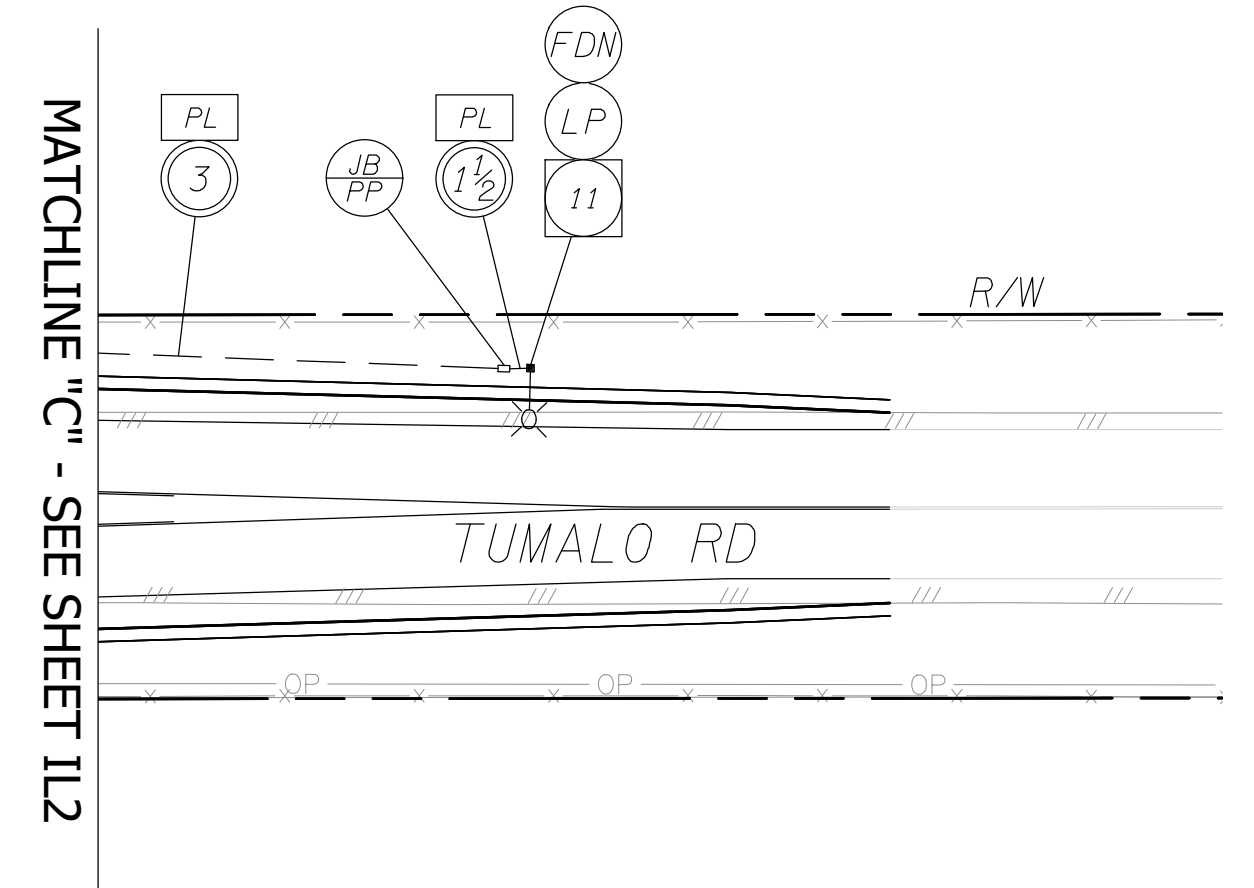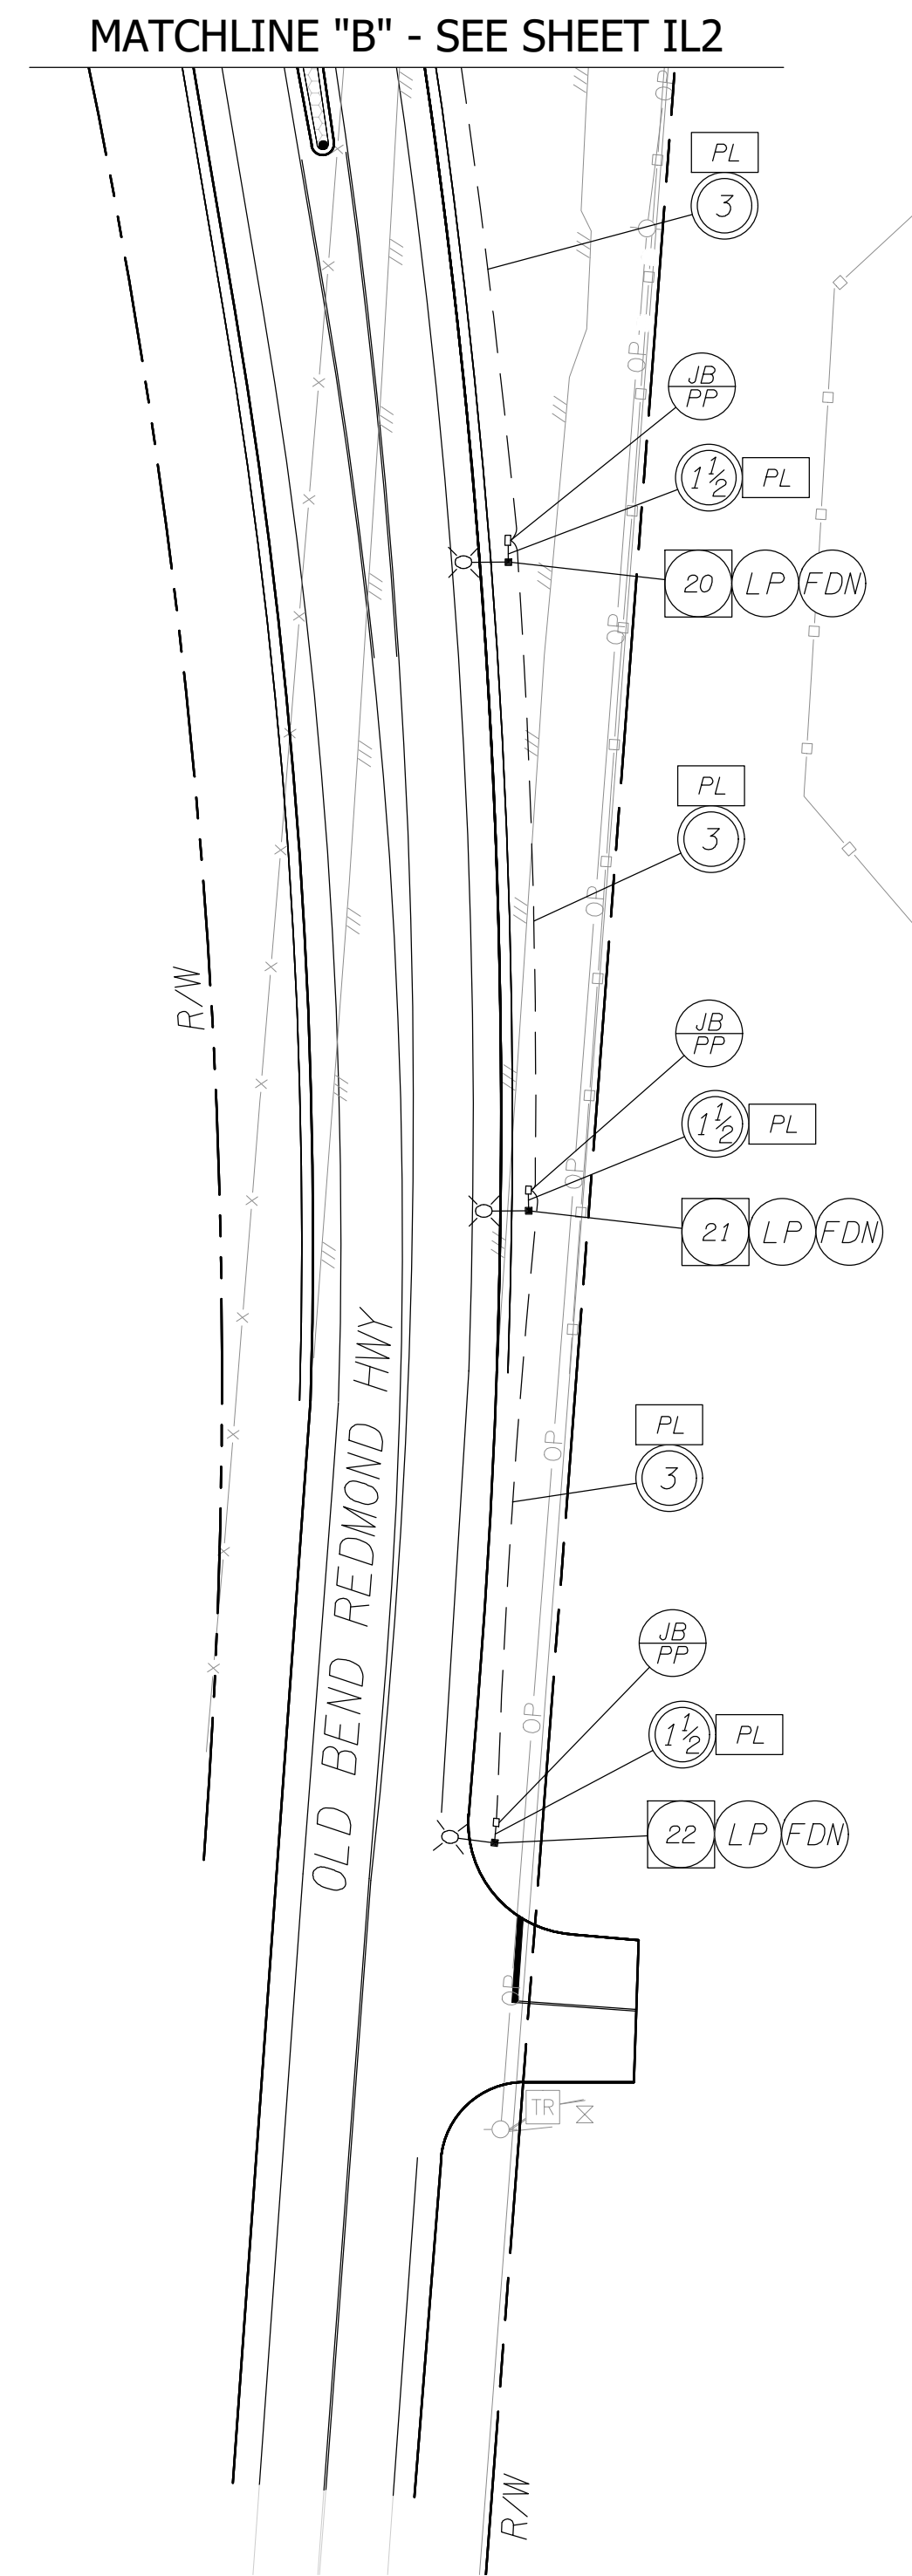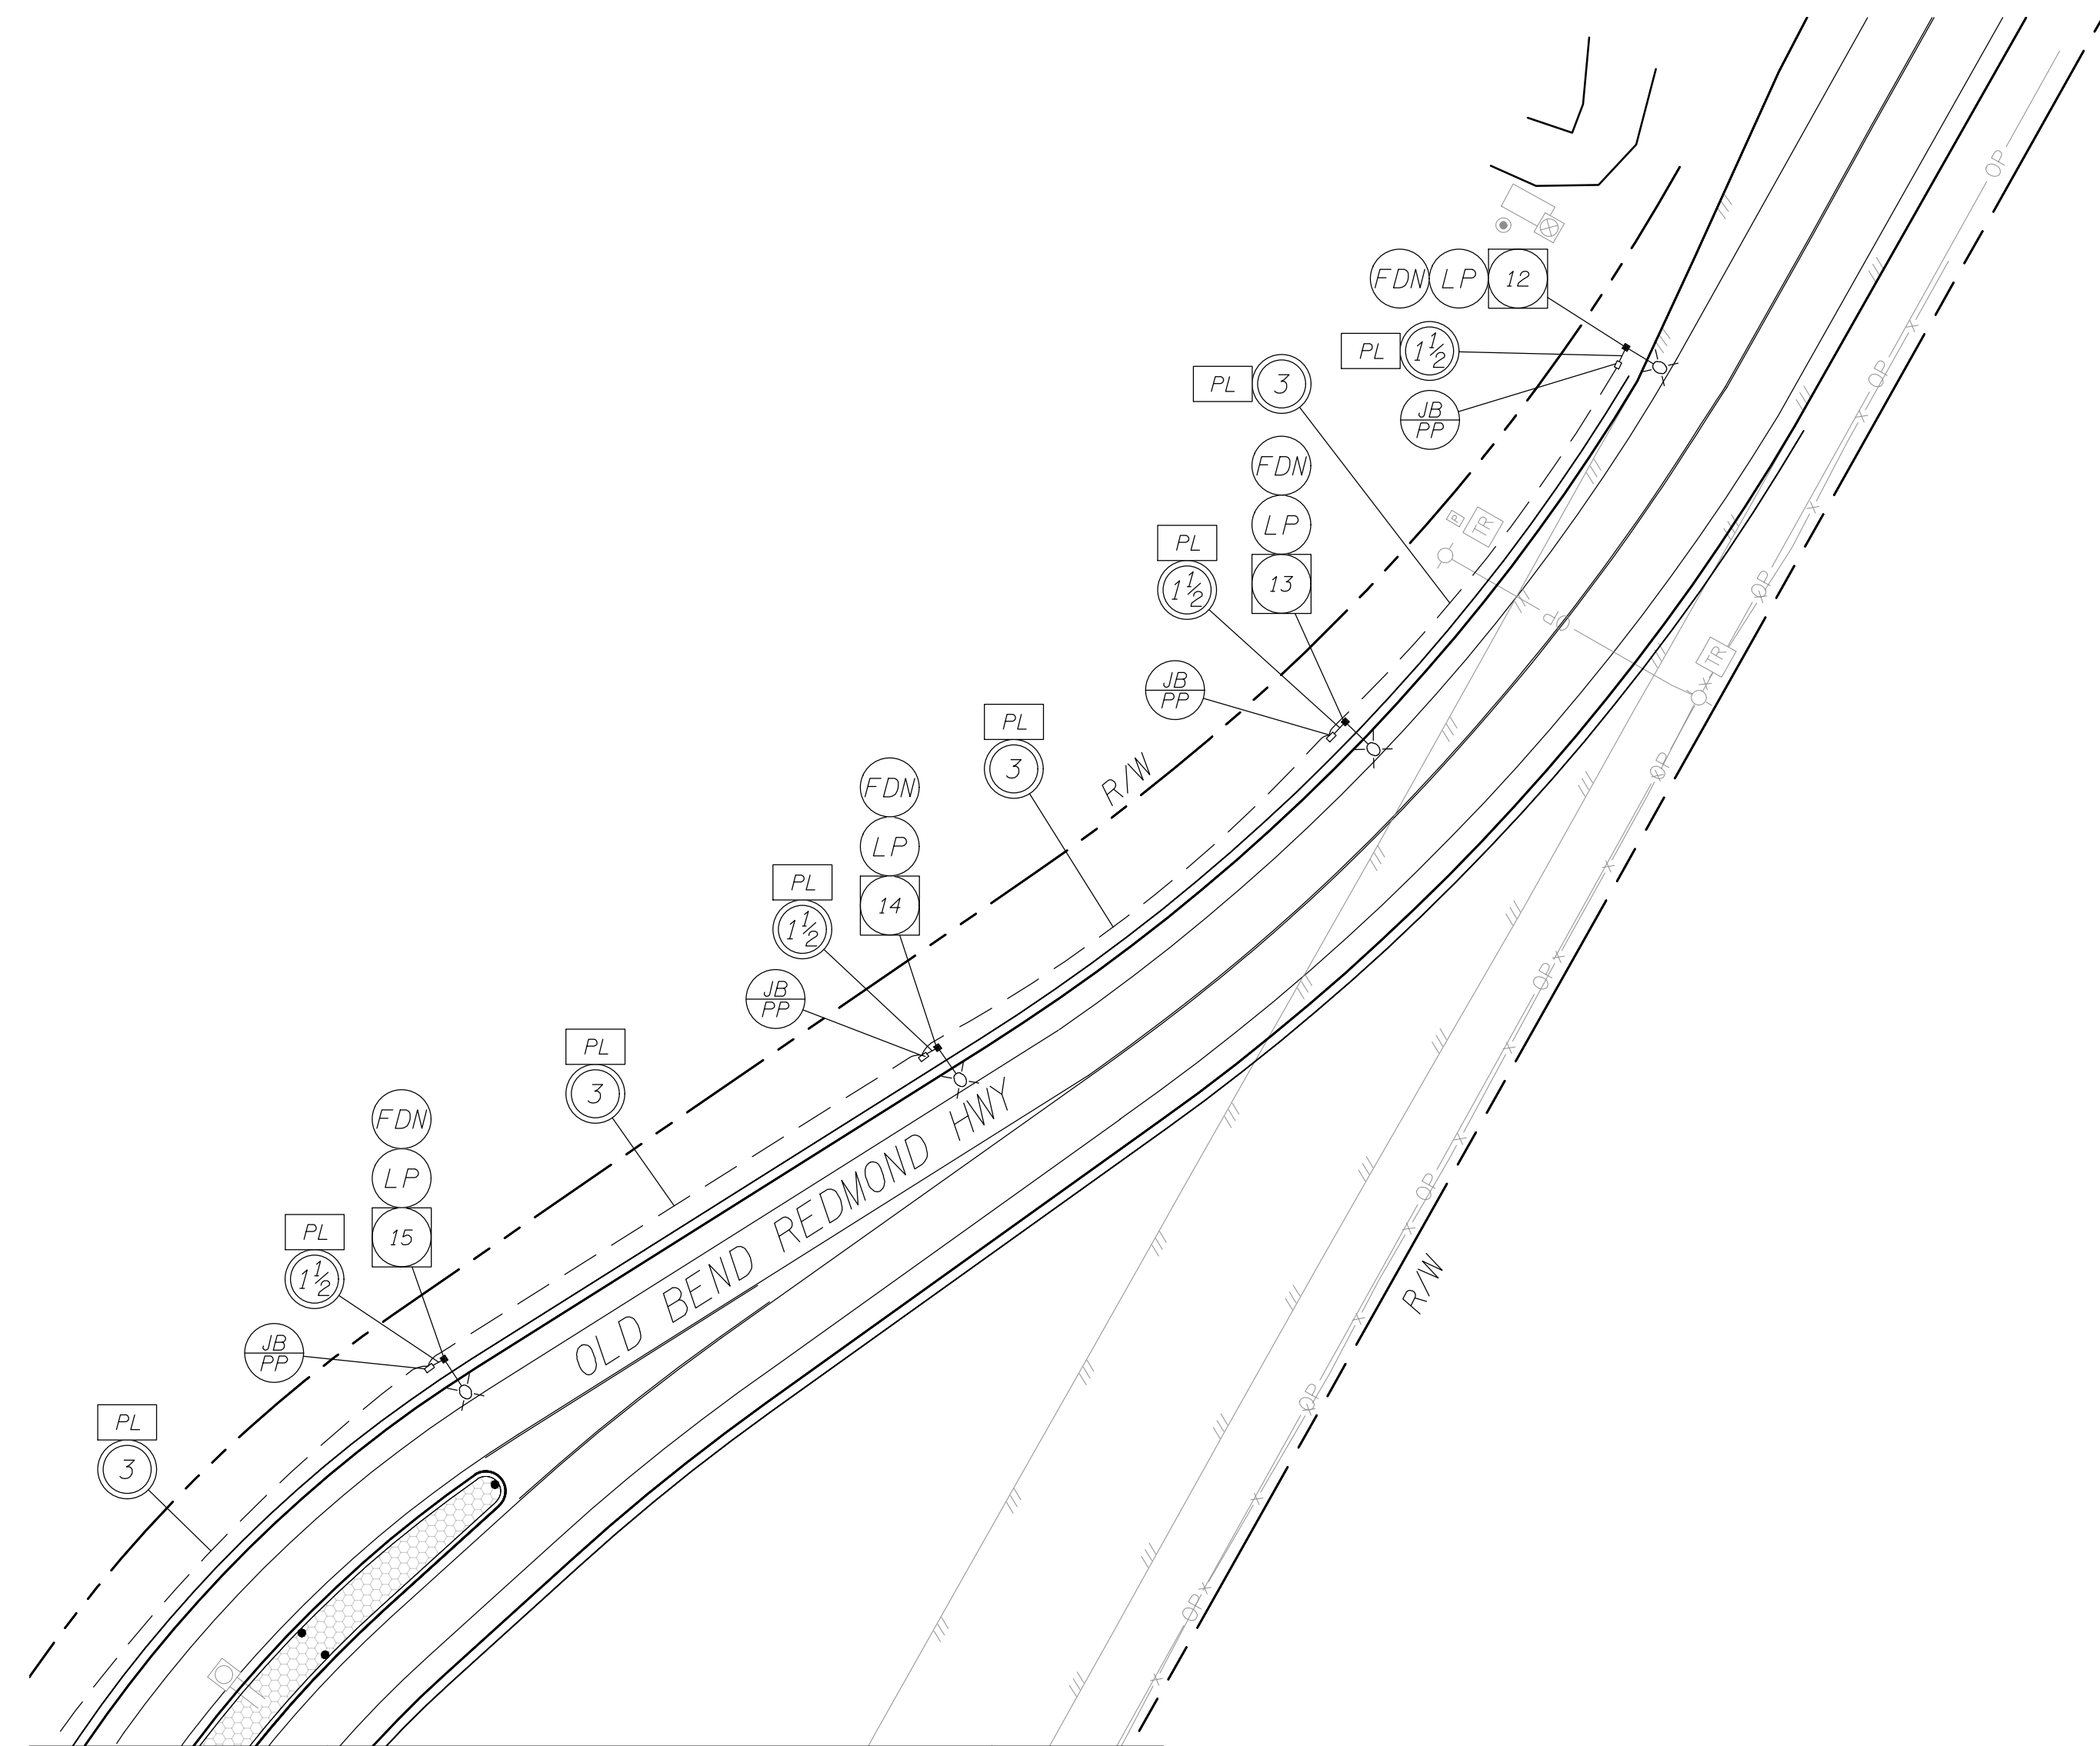

| REVISIONS | DATE | BY | DESIGNED LTN |
|-----------|------|----|-----------------|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

ONE INCH AT FULL SCALE.
 IF NOT, SCALE ACCORDINGLY

FILE NAME

JOB No.

DATE





PROJECT NAME
**OLD BEND-REDMOND HIGHWAY/TUMALO RD
 INTERSECTION IMPROVEMENTS**
 DESCHUTES COUNTY

FOR BIDDING REFERENCE ONLY



ILLUMINATION PLAN

DRAWING NO.
 43 OF 43



IL3

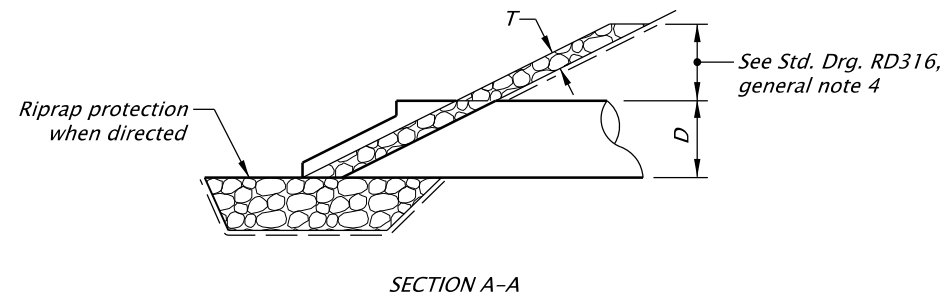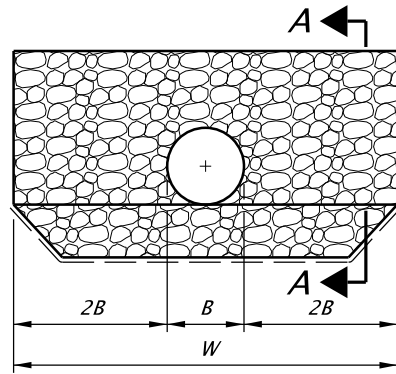

SLOPED OR PROJECTING END

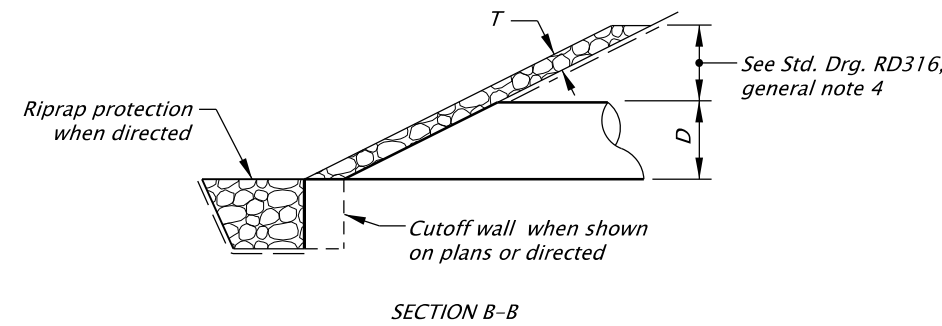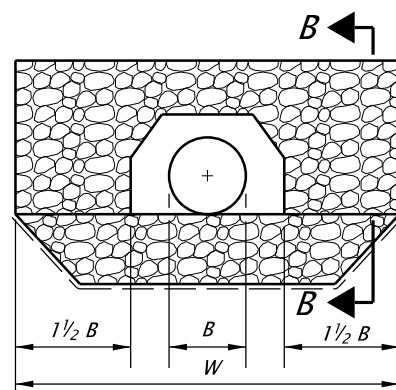


SLOPED END WITH SLOPE PAVING

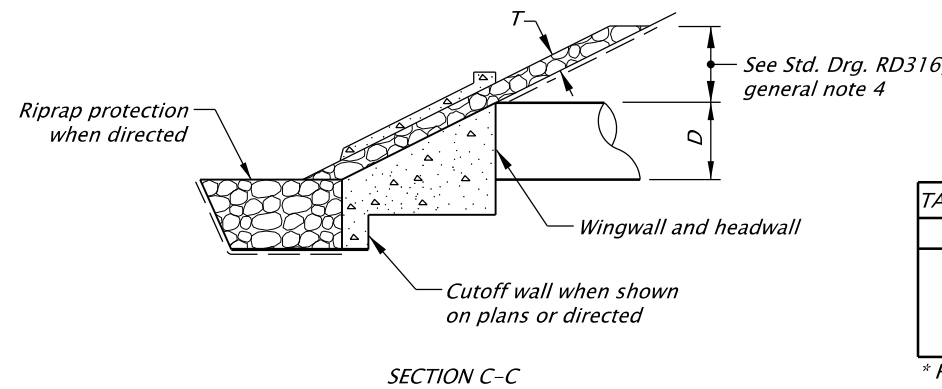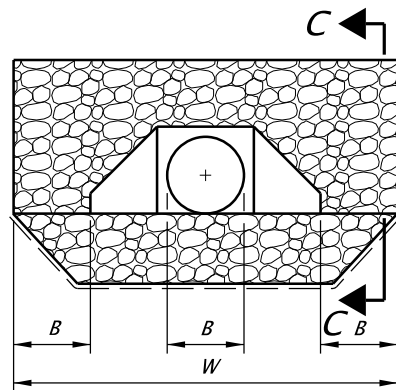


HEADWALL AND WINGWALLS

B = Diameter of circular barrel or span of arch pipe, box, or open-bottom arch.
 D = Diameter of circular barrel or rise of arch pipe, box, or open-bottom arch.
 T = Thickness of riprap blanket, see Table A.


EMBANKMENT PROTECTION

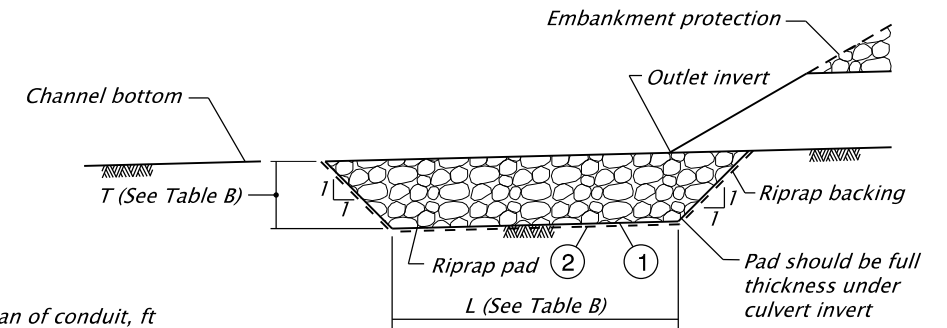

a) Riprap pad without cutoff wall, elevation view

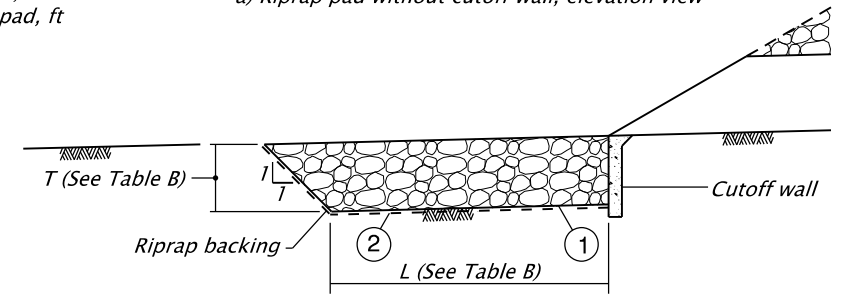

b) Riprap pad with cutoff wall, elevation view

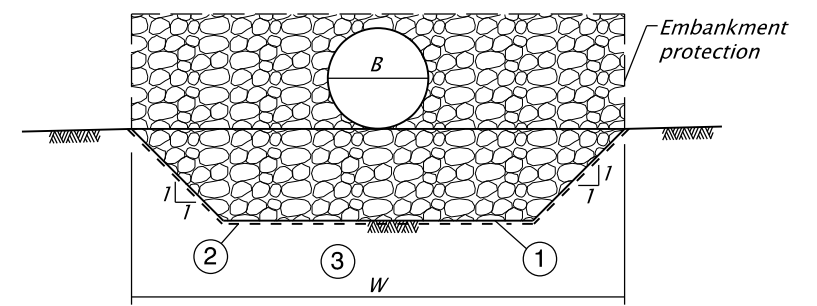

c) Riprap pad, end view

B = Diameter or span of conduit, ft
 L = Length of bottom of riprap pad, ft
 T = Thickness of riprap pad, ft
 W = Width of top of riprap pad, ft

RIPRAP PAD NOTES:

- 1 Do not excavate non-erodible rock in order to place riprap.
- 2 Use riprap backing under Class 200 and Class 700 loose riprap.
- 3 Top width (W) of the riprap pad is the larger of 5B or the width of the embankment slope protection.

RIPRAP PADS

GENERAL NOTES FOR ALL DETAILS:

1. See Std. Drg's. RD300 & RD304 for installation details.
2. Open ends of pipes normally require a site specific design, and may require special treatment (sloped ends, culvert embankment protection, paved end slopes, safety end sections, or other measures). See special details or Standard Drawings as called for on plans.

CALC. BOOK NO. N/A BASELINE REPORT DATE 24-Nov-2015

NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications

OREGON STANDARD DRAWINGS

CULVERT EMBANKMENT PROTECTION and RIPRAP PADS

2018

| DATE | REVISION | DESCRIPTION |
|------|----------|-------------|
| | | |
| | | |
| | | |

| Riprap Class | T Distance |
|--------------|-------------|
| 50 | 12 Inches |
| 100 | 18 Inches |
| 200 | 24 Inches * |
| 700 | 36 Inches * |


* Riprap backing required between riprap and embankment

| Riprap Class | L* (ft) | T (ft) |
|--------------|-----------|--------|
| 50 | 4B or 1.3 | 2.3 |
| 100 | 4B or 1.6 | 3.3 |
| 200 | 4B or 2.0 | 4.3 |
| 700 | 4B or 3.3 | 5.6 |


* L is the greater of 4B or the listed dimension.

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.


rd364.dgn 25-JUL-2017

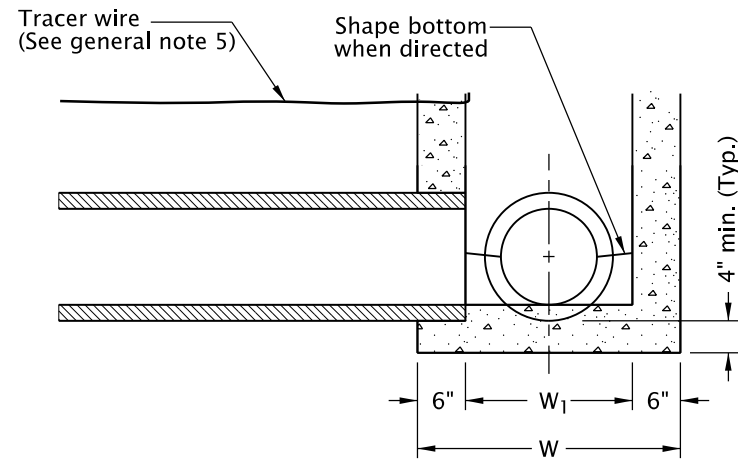


DETAIL A
WITHOUT SUMP

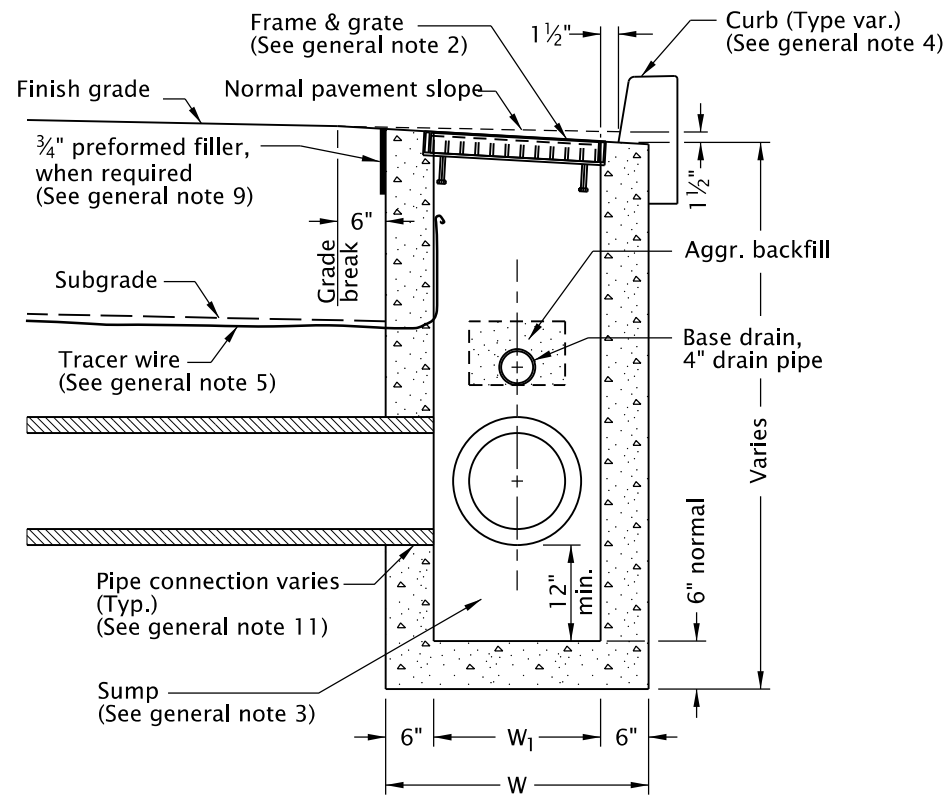

SECTION B - B

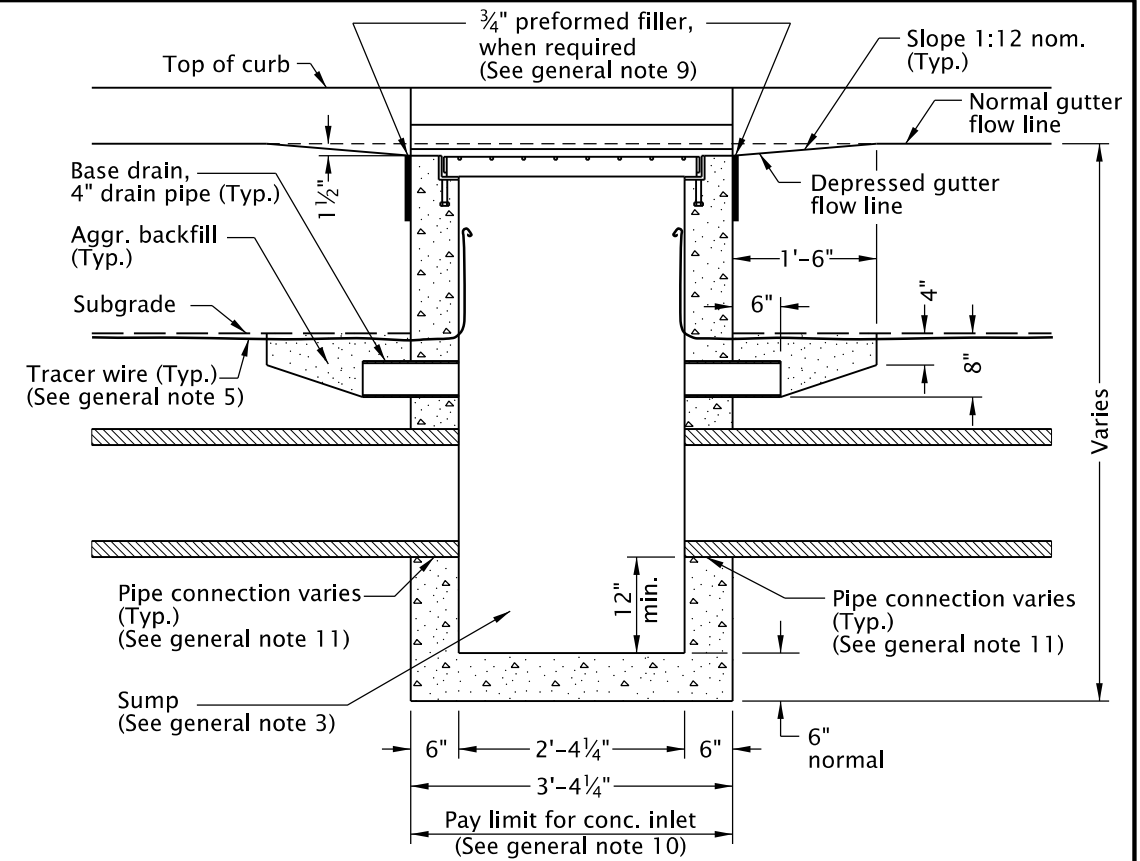

SECTION A - A

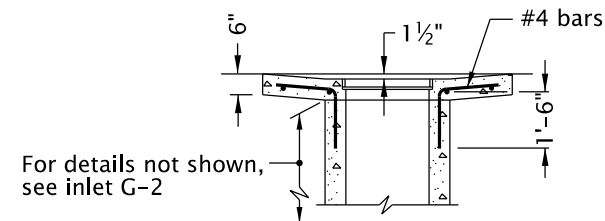


SECTION C - C

For details not shown,
see inlet G-2

NOTE:

All reinforcement to be placed 2" clear of nearest
face of concrete unless shown or noted otherwise

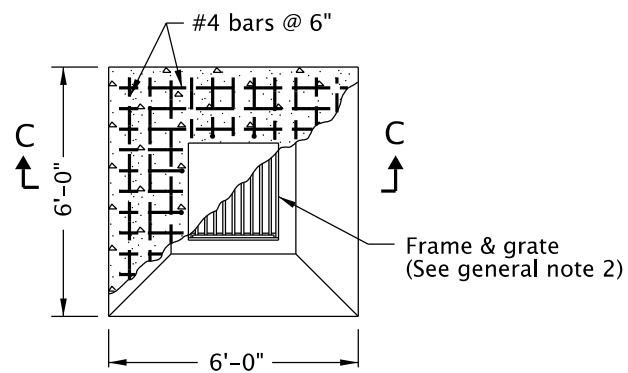


PLAN
TYPE G-2MA

| TABLE A | | |
|------------------|------------------------------------|------------------------------------|
| INLET TYPE | W | W ₁ |
| G-1 | 2'-8 ⁷ / ₈ " | 1'-8 ⁷ / ₈ " |
| G-2, G-2M, G-2MA | 3'-3 ³ / ₈ " | 2'-3 ³ / ₈ " |

GENERAL NOTES FOR ALL DETAILS:

- Where precast inlets are used as an alternate to cast-in-place inlets, a 4" compacted leveling bed of sand or 1/4"-0 crushed aggregate shall be provided. All precast inlets shall conform to requirements of ASTM C913.
- Graphics show G-1 inlet with Type 2 grate. See Table A for inlet dimensions.
Type 1 grate allowed only in locations not subject to bicycle or pedestrian use.
For frame and grate details, see Std. Dwg. RD365.
- Provide sump only where shown on plans, and allowed by jurisdiction. See Detail A for inlet without sump.
- For curb details, see Std. Dwgs. RD700 & RD701.
- See Std. Dwg. RD336 for tracer wire details, or approved alternate.
- Max. pipe diameter varies with pipe material.
- Location, elevation, diameter, slope, and number of pipe(s) varies, see project plans.
- All concrete shall be commercial grade concrete.
- 3/4" preformed filler (in concrete pavement or gutter only) to extend through thickness of concrete.
- See Std. Dwg. RD363 for gutter transition section, when curb and gutter are required.
- See Std. Dwg. RD339 for pipe to structure connections.

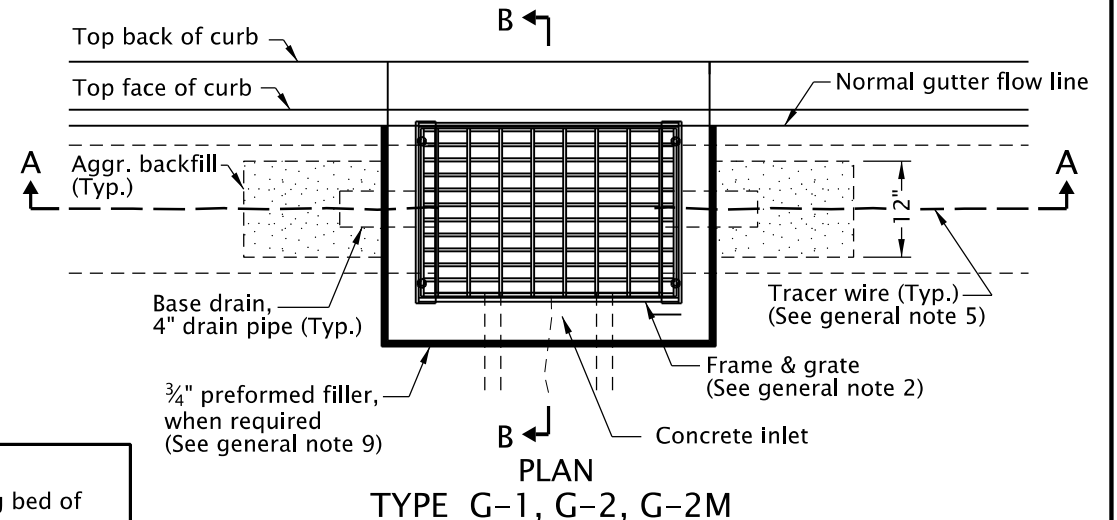

PLAN
TYPE G-1, G-2, G-2M

CALC. BOOK NO. N/A

BASELINE REPORT DATE

NOTE: All material and workmanship shall be in accordance with
the current Oregon Standard Specifications

OREGON STANDARD DRAWINGS
CONCRETE INLETS
TYPE G-1, G-2, G-2M, & G-2MA


2018

| DATE | REVISION DESCRIPTION |
|------|----------------------|
| | |
| | |
| | |


The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

RD364

rd1040.dgn 11-08-2017

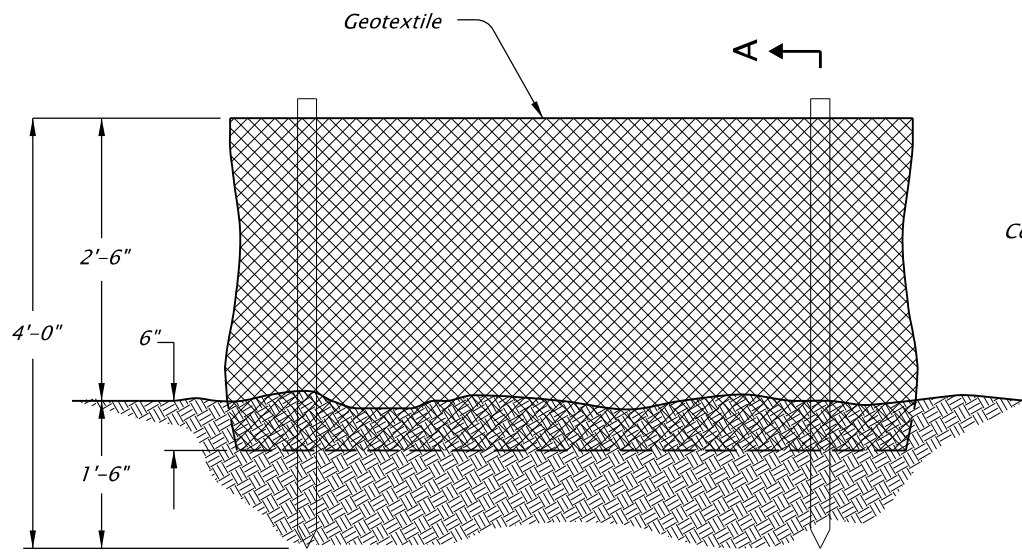


FRONT VIEW

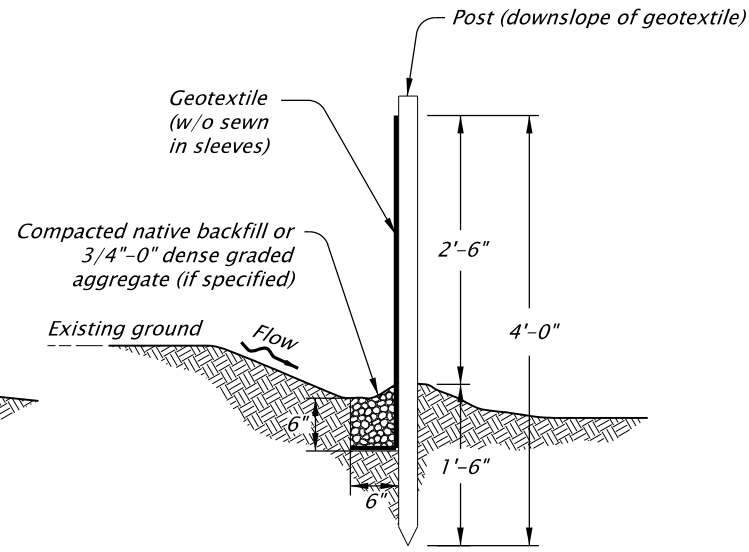

SECTION A-A


SEDIMENT FENCE AND GEOTEXTILE BURY DETAIL - TYPE 1

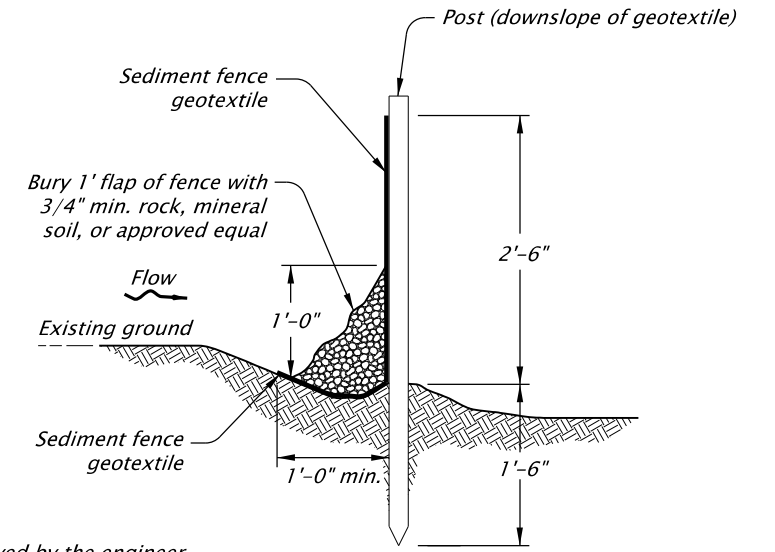


NOTES:

1. Use must be approved by the engineer.
2. Not approved for use with sediment fencing with sewn-in post sleeves.

ALTERNATE SEDIMENT FENCE W/O TRENCHING - TYPE 2

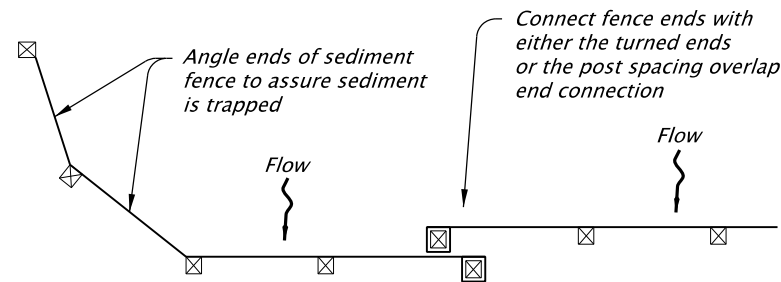

PLAN VIEW

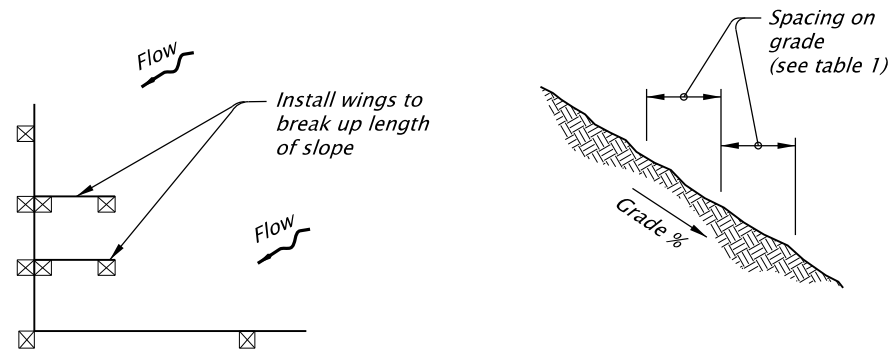

TERMINATION AT CORNER OR PROPERTY LINE

NOTES:


1. Use 2" X 2" wood fence posts.
2. Posts to be installed on downhill side of sediment fence geotextile. Position posts to prevent separation from geotextile.
3. Compact filter fabric trench backfill and soil on uphill side of fence.
4. Locate fence no closer than three feet to the toe of a slope.
5. Wing spacing shall comply with table 1.

TABLE 1
FENCE SPACING
FOR GENERAL APPLICATION

| INSTALL PARALLEL ALONG CONTOURS AS FOLLOWS | |
|--|--------------------------|
| GRADE | MAXIMUM SPACING ON GRADE |
| Grade < 10% | 300' |
| 10% ≤ Grade < 15% | 150' |
| 15% ≤ Grade < 20% | 100' |
| 20% ≤ Grade < 30% | 50' |
| 30% ≤ Grade | 25' |

TABLE 2

| POST SPACING | |
|--------------|---|
| 6' | Sediment Fence with Geotextile elongation less than 50% |
| 4' | Sediment Fence with Geotextile elongation 50% or more |

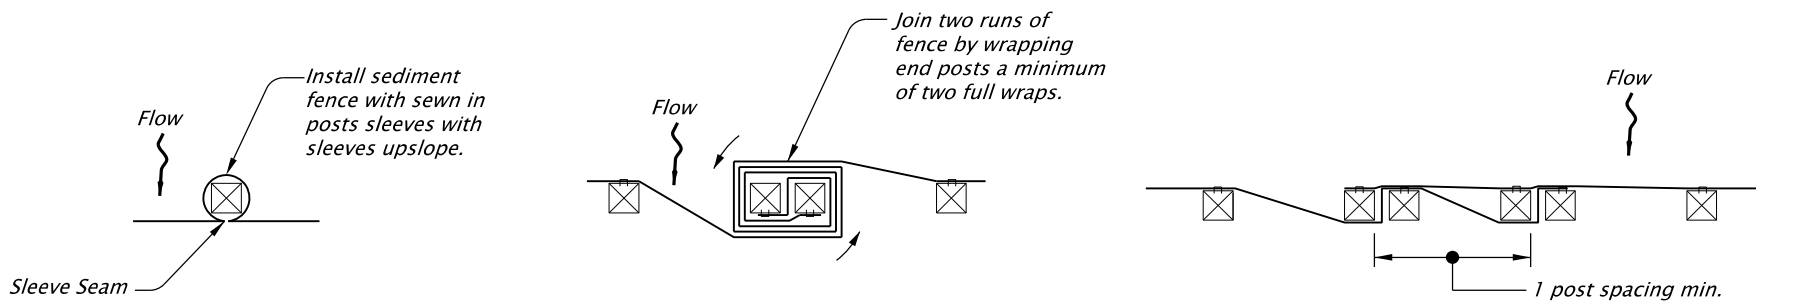

GEOTEXTILE WITH POST SLEEVES

TURNED ENDS CONNECTION


POST SPACING OVERLAP CONNECTION

GEOTEXTILE END CONNECTIONS

| | |
|--|---|
| CALC. BOOK NO. <u>6403, 6404, 6405</u> | BASILINE REPORT DATE <u>November 2017</u> |
| <p>The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.</p> | NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications |
| | OREGON STANDARD DRAWINGS |
| | SEDIMENT FENCE |
| | 2018 |
| DATE | REVISION DESCRIPTION |
| | |
| | |
| | |

RD1040


rd100.dgn 25-JUL-2017

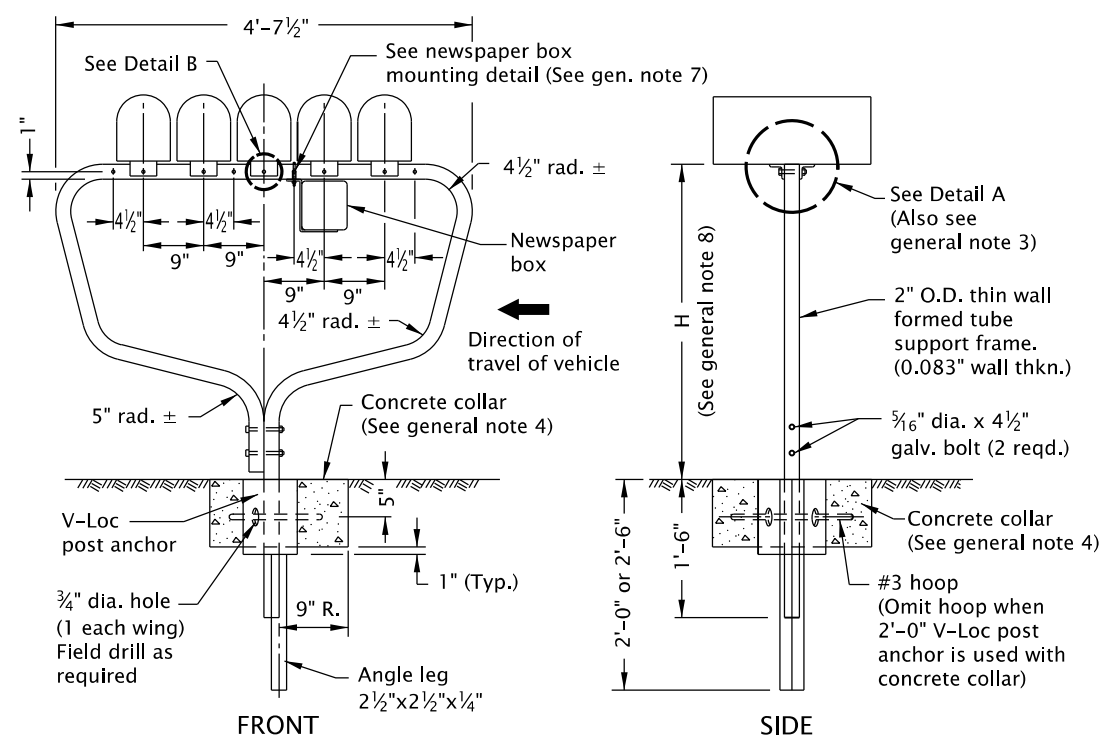


CONCRETE COLLAR
(See general note 4)

MULTIPLE SUPPORT

(Supports 5 standard (Sizes 1 & 1 1/2) mailboxes or 4 large (Size 2) mailboxes)

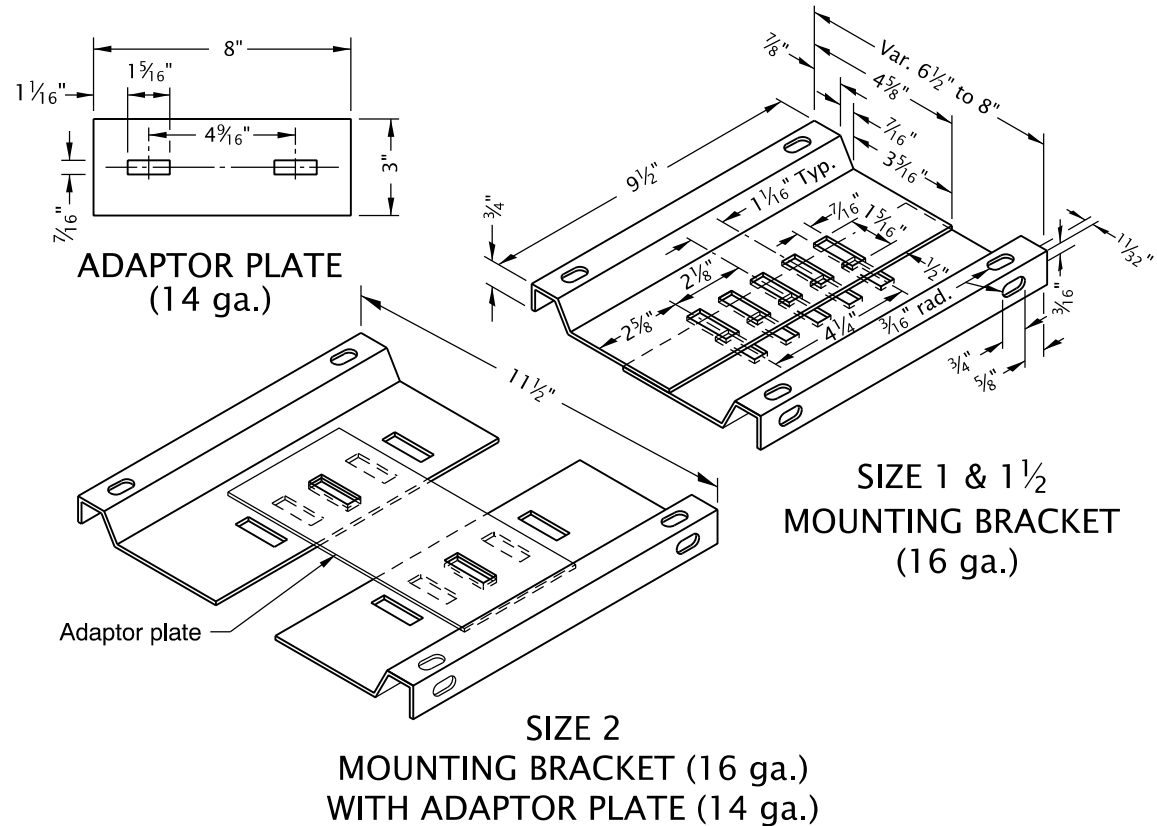


SIZE 2 MOUNTING BRACKET (16 ga.) WITH ADAPTOR PLATE (14 ga.)

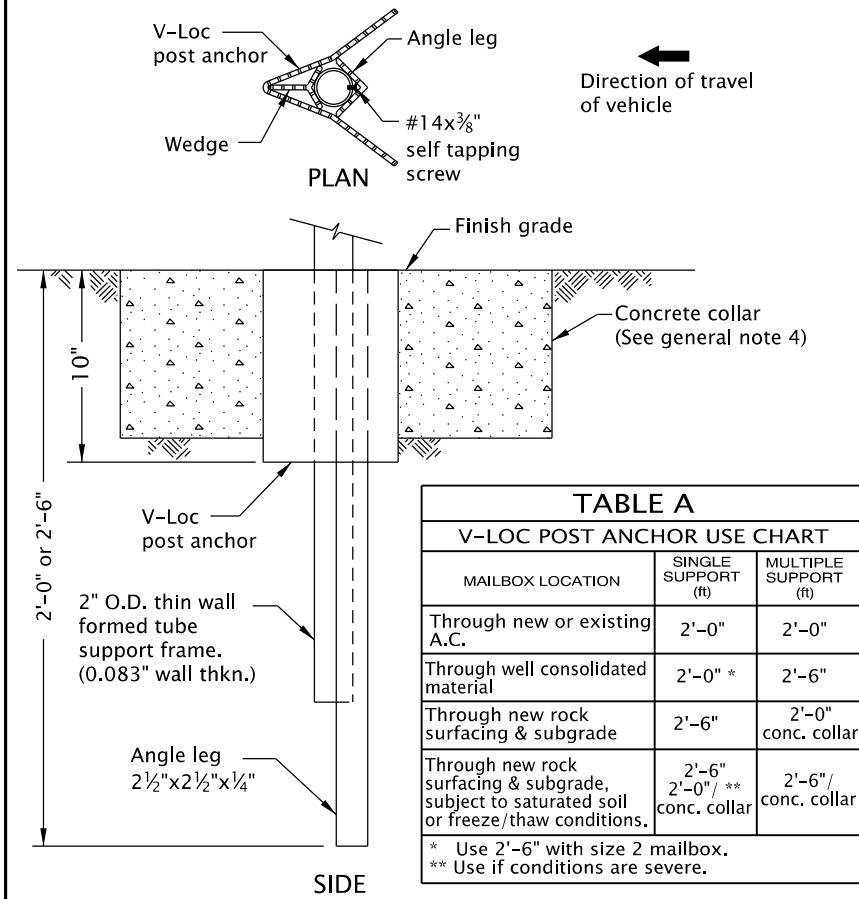


| TABLE A V-LOC POST ANCHOR USE CHART | | |
|---|---------------------|-----------------------|
| MAILBOX LOCATION | SINGLE SUPPORT (ft) | MULTIPLE SUPPORT (ft) |
| Through new or existing A.C. | 2'-0" | 2'-0" |
| Through well consolidated material | 2'-0" * | 2'-6" |
| Through new rock surfacing & subgrade | 2'-6" | 2'-0" conc. collar |
| Through new rock surfacing & subgrade, subject to saturated soil or freeze/thaw conditions. | 2'-6" 2'-0"/ ** | 2'-6"/ conc. collar |

* Use 2'-6" with size 2 mailbox.
** Use if conditions are severe.


POST MOUNTING SOCKET

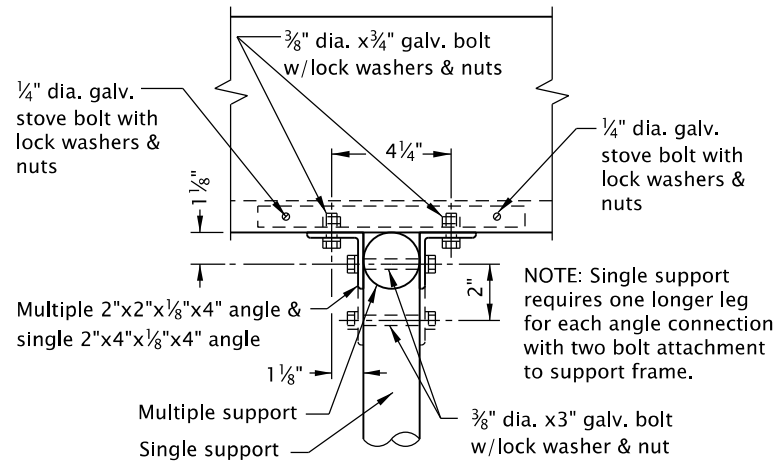

DETAIL A

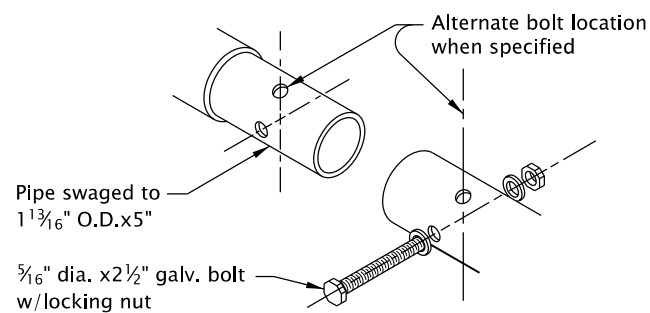

DETAIL B

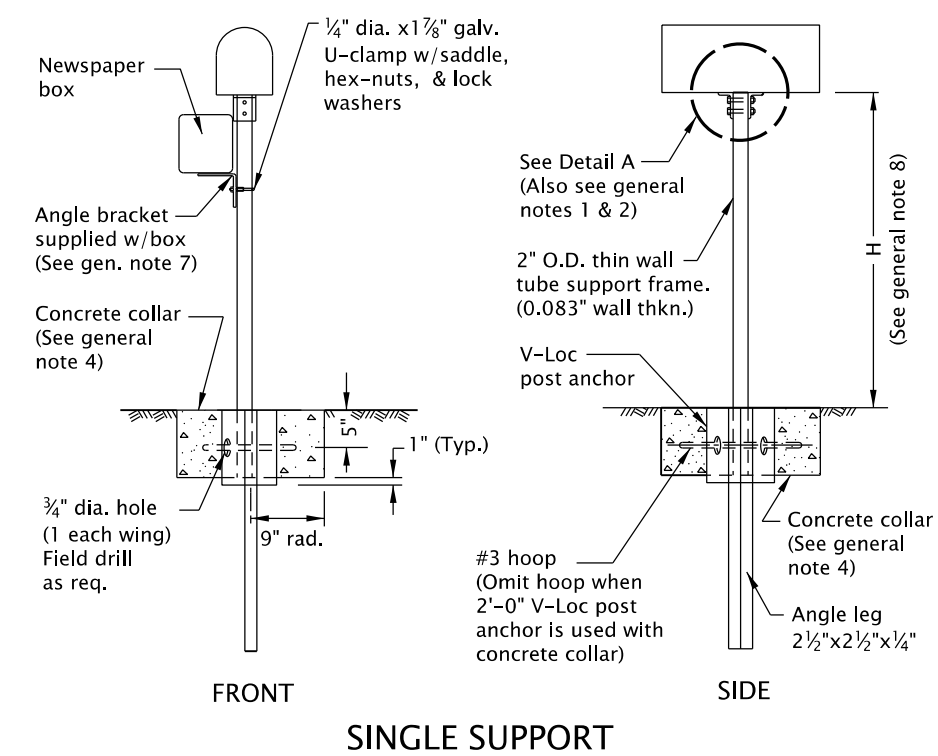

SINGLE SUPPORT

GENERAL NOTES FOR ALL DETAILS:

- Angle connections to be parallel to traffic flow for Size 2 mailbox mounted on single post.
- All holes in the tube support frame are to be predrilled by the manufacturer.
- Size 2 mailbox mounted on a multiple support requires 2 each 3/8" dia. x 5/8" galv. bolts with lock washers and nuts to attach the adaptor plate to the mounting bracket. The unit will then require 4 angle connections to attach to the formed tube support frame. See Detail A.
- Provide concrete collar when any of the following conditions exist:
 - when required in Table A
 - when required by project plans
 - as directed by the Engineer
 Concrete collar, when required, to be poured in place after V-Loc post anchor has been installed, level and plumb. Do not excavate below bottom of V-Loc post anchor. Care shall be taken that no concrete is placed within anchor.
- Other proprietary products available as listed in ODOT's QPL.
- For mailbox installation locations, see Std. Dwg. RD101 and project plans.
- For Newspaper Box Mounting Detail, see Std. Dwg. RD101.
- Mounting height (H) shall be 42" nominal, measured from vehicle driving surface.
- See project plans for detail not shown.

CALC. BOOK NO. N/A

BASELINE REPORT DATE 25-JUL-2017

NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications

OREGON STANDARD DRAWINGS



MAILBOX SUPPORT

2018

| DATE | REVISION DESCRIPTION |
|------|----------------------|
| | |
| | |
| | |

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

RD100

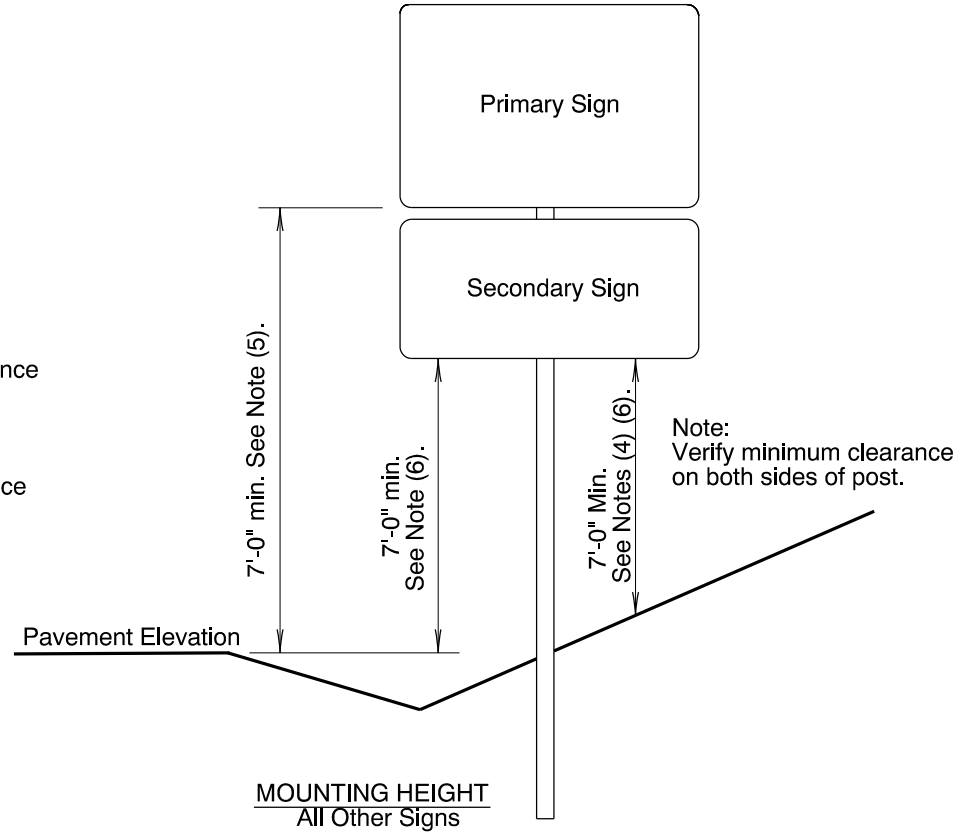
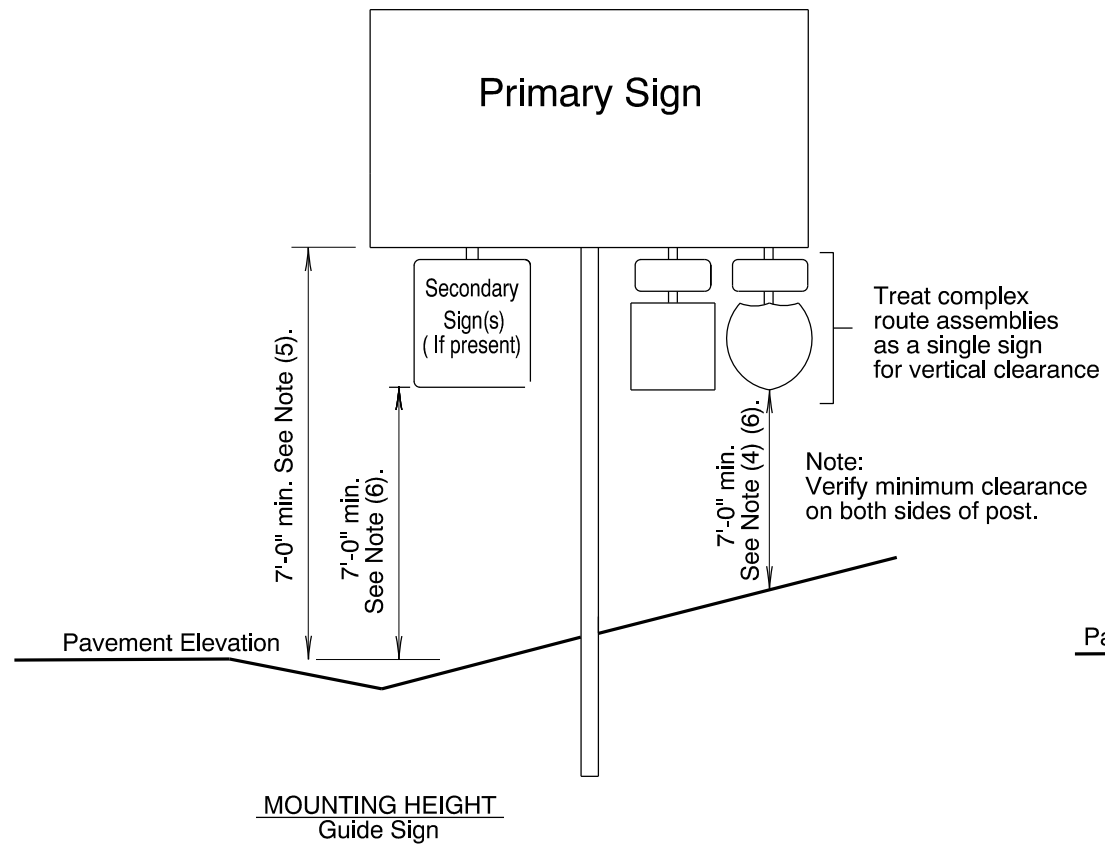


General Installation Notes:

- a. Signing details shown on this sheet are intended to convey "typical" conditions only. Individual locations may require installation different from those shown. For guidance regarding unique installations or exceptions call the Project Sign Designer or Region Traffic Section.
- b. Locate breakaway supports away from ditches to avoid problems with erosion, corrosion, debris, maintenance and breakaway performance. See Dwg. No. TM635 for more information.
- c. For wood post support details see Dwg. No. TM670.
- d. For perforated steelsquare tube support details see Dwg. No. TM681.
- e. For triangular base breakaway support details see Dwg. No. TM602.
- f. For multi-post breakaway support details see Dwg. No. TM600.
- g. Mounting heights should not be more than 3 inches more than the minimum heights shown, where practical.
- h. 2" vertical spacing between all signs.


Notes:

- 1). 6' minimum if behind barrier.
- 2). 2' minimum if restricted R/W.
- 3). 20' for ramp terminals.
- 4). 8' minimum if bicycle path underneath.
- 5). 8' minimum if secondary signs attached.
- 6). 5' minimum if outside clearzone, in rural areas and no pedestrians underneath.
- 7). For multi-post installations measure distance from post closest to roadway.

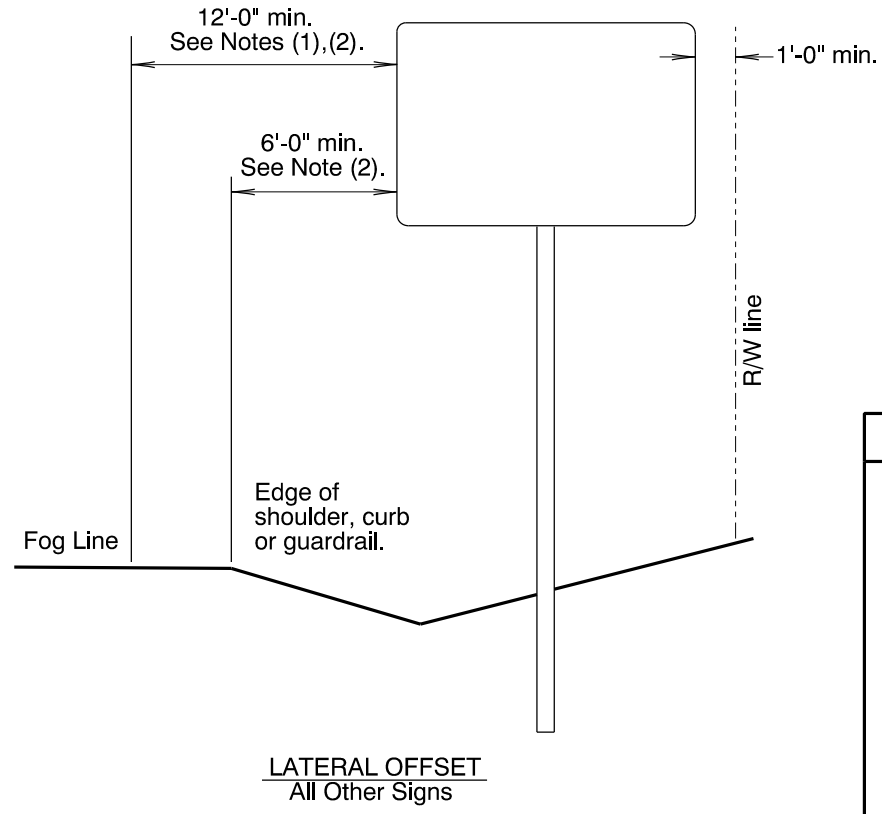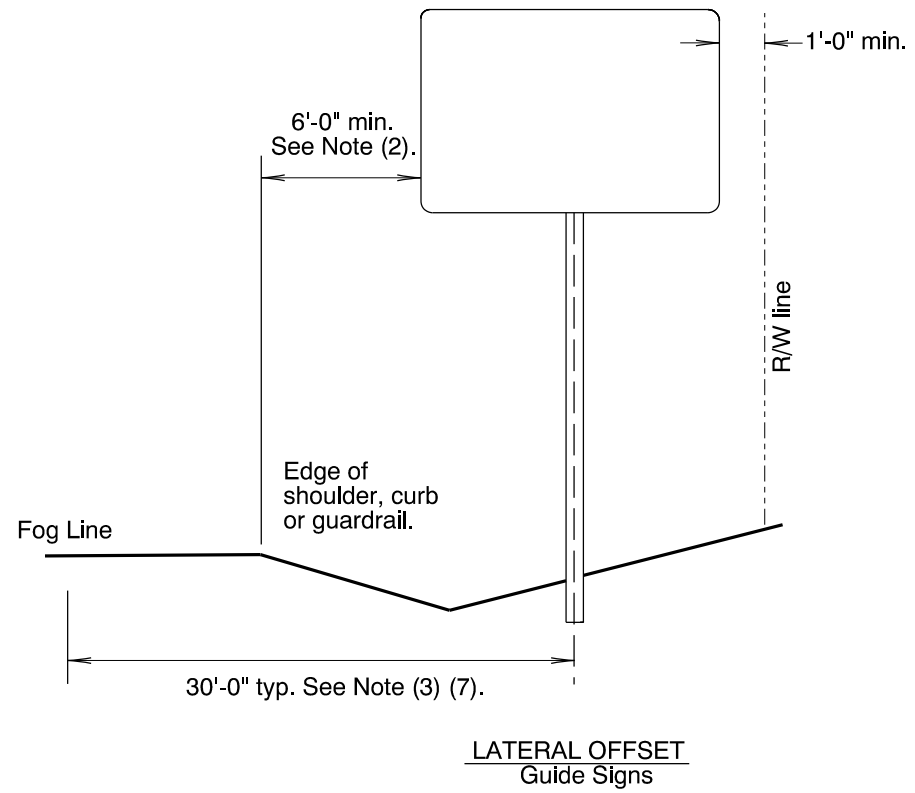


| | | | |
|---|----------|---|--|
| CALC. BOOK NO. <u>N/A</u> | | BASELINE REPORT DATE <u>01/08/2018</u> | |
| NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications | | | |
| <p><i>The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.</i></p> | | OREGON STANDARD DRAWINGS | |
| | | SIGN INSTALLATION DETAILS | |
| | | 2018 | |
| DATE | REVISION | DESCRIPTION | |
| 1/08/18 | | Adjusted slope line on Mounting Height detail for clarity | |
| | | | |
| | | | |


TM201.dgn 1-3-2017

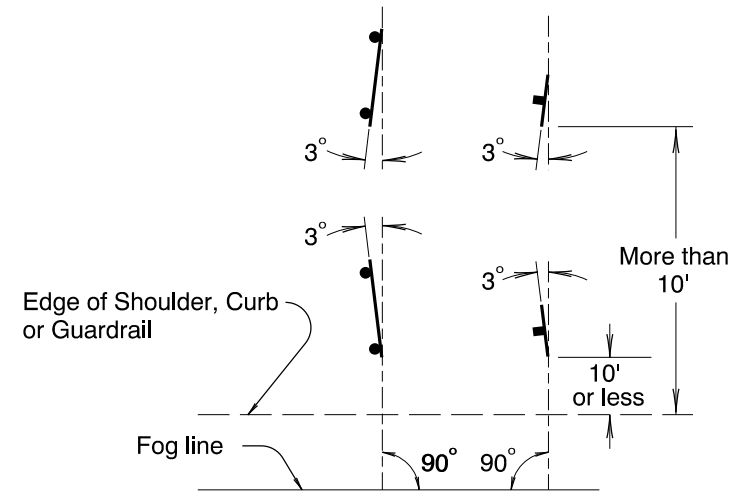

SIGN PLACEMENT

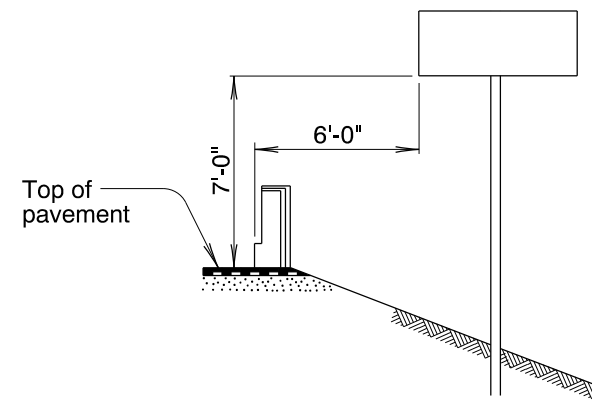


ELEVATION

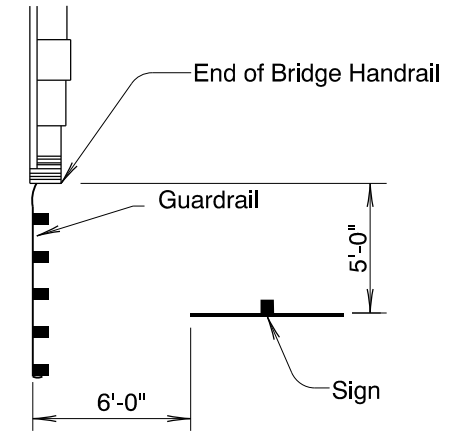

PLAN

SIGN LOCATION FOR FREEWAY OVERCROSSING
(MINIMUM VALUES)

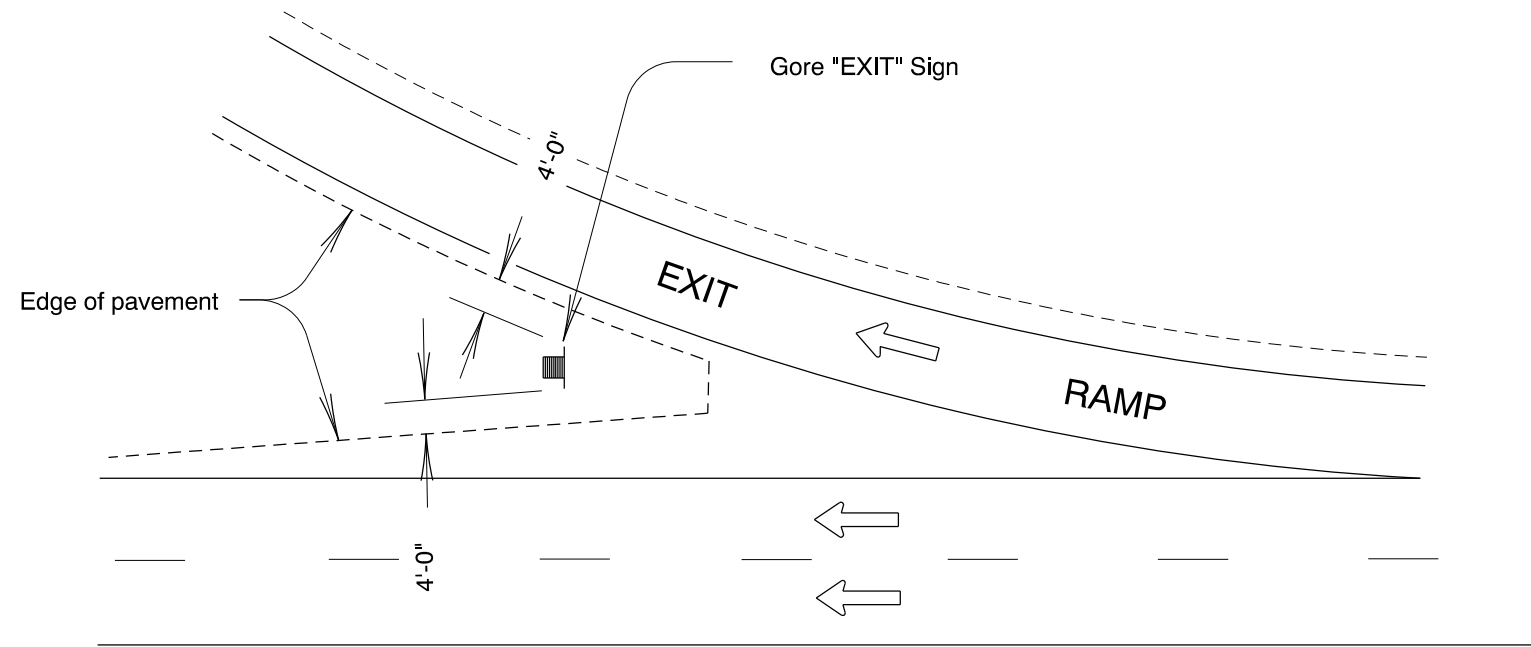

TYPICAL "EXIT" SIGN INSTALLATION


| CALC. BOOK NO. N/A | BASELINE REPORT DATE 12-10-09 | | | | | | | | | | | | |
|---|---|----------|-------------|-------------|--|--|--|--|--|--|--|--|--|
| <p><i>The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.</i></p> | NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications | | | | | | | | | | | | |
| | <p>OREGON STANDARD DRAWINGS</p> <p>MISCELLANEOUS SIGN PLACEMENT DETAILS</p> <p>2018</p> | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>DATE</th> <th>REVISION</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> <tr> <td> </td> <td> </td> <td> </td> </tr> </tbody> </table> | DATE | REVISION | DESCRIPTION | | | | | | | | | |
| | DATE | REVISION | DESCRIPTION | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |
| | | | | | | | | | | | | | |

TM201




E = BORDER WIDTH F = BORDER RADIUS
 * = USE FOR TEXT INCLUDING LOWER-CASE g, j, p, q and y

| | A | A* | B | C | D | E | F | G | G* |
|---|-----|-----|-----|-----|-----|----|-----|-----|-----|
| GROUND-MOUNTED SIGN (2-3 LANE HWYS) | 12" | 15" | 6" | 4" | 2½" | 1" | 1½" | 3" | 5" |
| GROUND-MOUNTED SIGN (4+ LANES AND 40 MPH OR LESS) | 12" | 15" | 6" | 4" | 2½" | 1" | 1½" | 3" | 5" |
| GROUND-MOUNTED SIGN (4+ LANES AND > 40 MPH) | 15" | 18" | 8" | 5" | 3⅞" | 1" | 1½" | 3½" | 6" |
| GROUND-MOUNTED SIGN (LOCAL ROAD, 25 MPH OR LESS) | 9" | 12" | 5" | 3" | 1⅞" | ½" | 1½" | 2" | 4" |
| MAST ARM MOUNTED SIGN (12" STANDARD) | 21" | 24" | 12" | 8" | 5" | 1" | 3" | 4½" | 7½" |
| MAST ARM MOUNTED SIGN (10" ALTERNATE) | 21" | 21" | 10" | 6" | 3¾" | 1" | 3" | 5½" | 7" |
| STACKED LEGEND SIGN (GROUND-MOUNTED) | 21" | 24" | 6" | N/A | N/A | 1" | 3" | 3" | 4" |
| STACKED LEGEND SIGN (MAST ARM MOUNTED) | 30" | 33" | 8" | 5" | 3⅞" | 1" | 3" | 3½" | 5" |

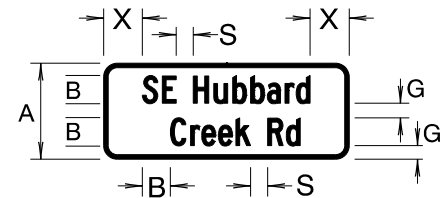




STACKED LEGEND FOR STREET NAME SIGN (GROUND-MOUNTED)

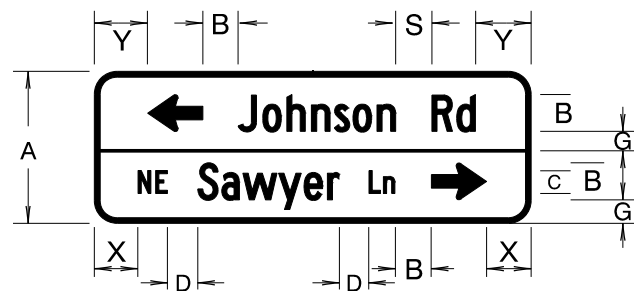




STACKED LEGEND FOR STREET NAME SIGN (MAST ARM MOUNTED)

Notes: If 12"C font on mast arm mounted sign yields signs larger than 21 square feet, the 10" Alternate may be used.
 White border and legend on mast-arm signs are to be ASTM Type IX retroreflective sheeting. Borders shall be flush with edge of sign. Dividers, where used, shall be same width as border.
 New Projects: Include mast-arm signs on Signing Plans.
 Existing Poles: Perform pole analysis prior to adding or enlarging signs.


STREET NAME SIGN DETAILS

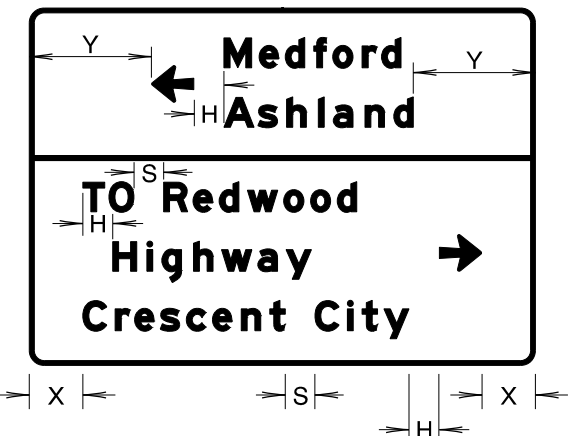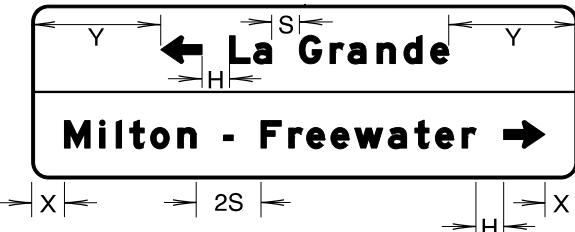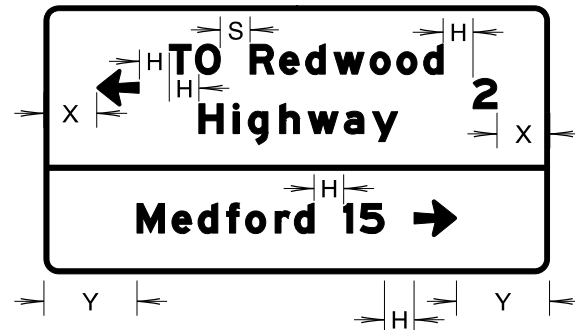

DIRECTIONAL SIGN DETAILS

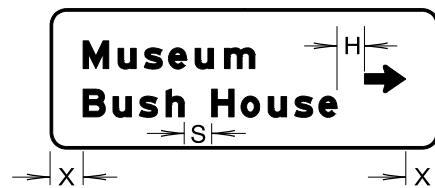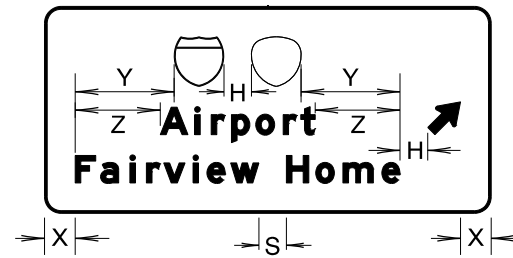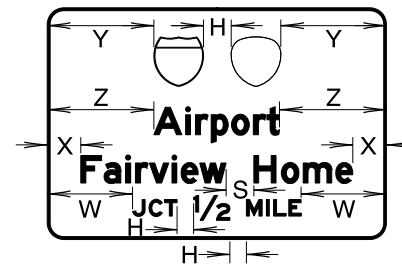

Vertically center arrow between lines of legend.

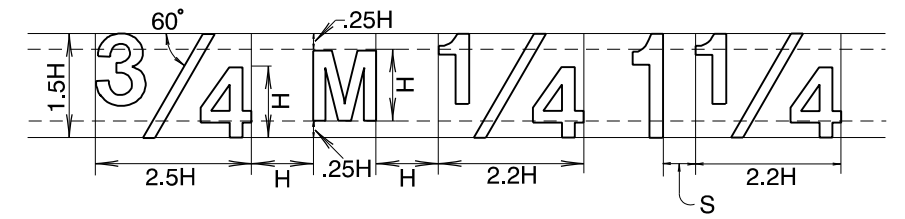

FRACTIONAL LAYOUT

| SERIES (FONT) | | | |
|---------------|-------|-------|--------|
| B | C | D | E |
| S.531 | H.625 | H.836 | H.1.00 |

SPACING BETWEEN WORDS

H = Letter Height
 S = Space between words
 W, X, Y & Z = ½ of remaining space
 X-Dimension should be approximately the same dimension as the letter Height (H). At a minimum the X-Dimension shall be no less than one-half the letter height (1/2 H)


Sign examples shown here are not drawn to scale, but to illustrate the layout of the legend items.

| | |
|---|--|
| CALC. BOOK NO. N/A | BASELINE REPORT DATE 1/07/2019 |
| NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications | |
| OREGON STANDARD DRAWINGS | |
| CONVENTIONAL ROADS | |
| DIRECTIONAL SIGN LAYOUT | |
| STREET NAME SIGNS | |
| 2018 | |
| DATE | REVISION DESCRIPTION |
| 1/08/18 | Edited ground-mounted sign rows on chart for clarity |
| 1/07/19 | Edited ground-mounted sign rows on chart for clarity |
| | |
| | |

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

TM223.dgn 1-3-2017


TM223

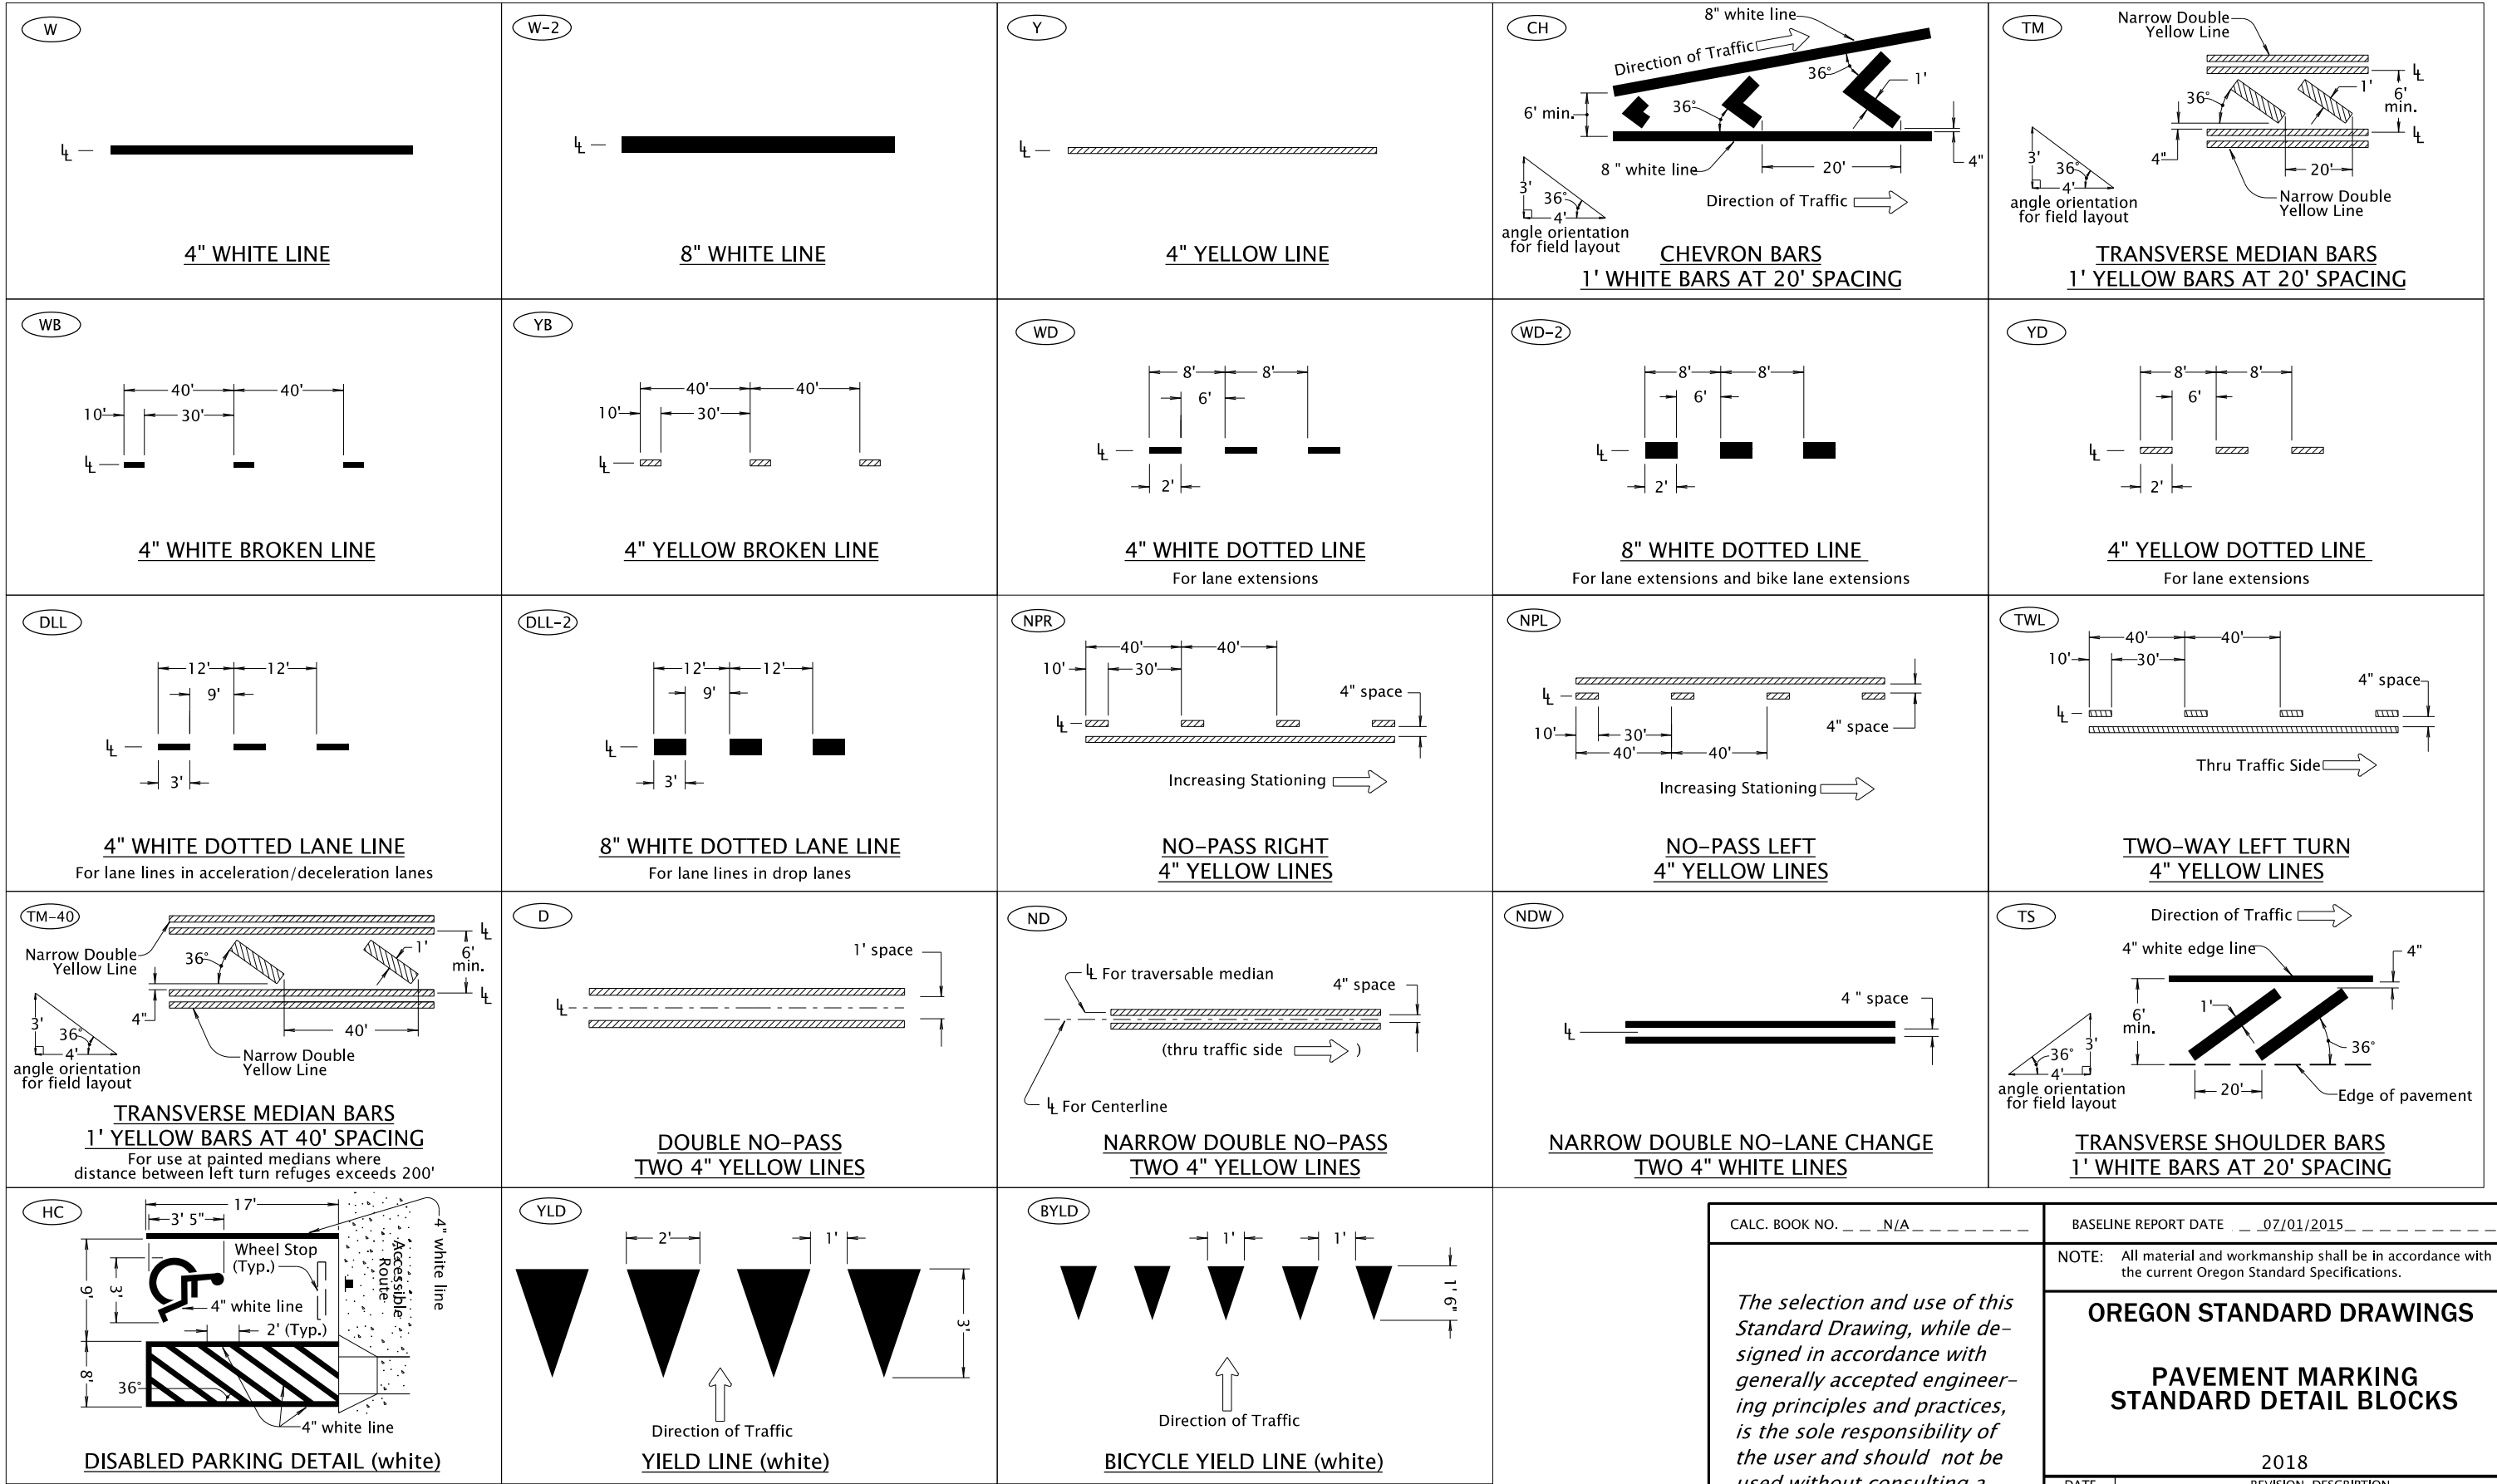

← Direction Of Traffic, Increasing Stationing Or Thru Traffic Side

⊥ — Lane line dimensions are shown on the striping plans

LEGEND

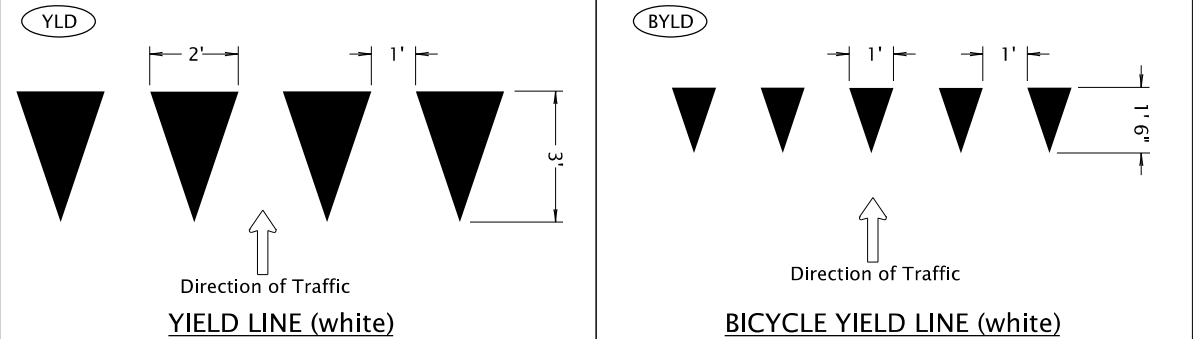

CALC. BOOK NO. ___ N/A ___

BASELINE REPORT DATE ___ 07/01/2015 ___


NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications.

OREGON STANDARD DRAWINGS
PAVEMENT MARKING
STANDARD DETAIL BLOCKS


2018

| DATE | REVISION DESCRIPTION |
|------|----------------------|
| | |
| | |
| | |


The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

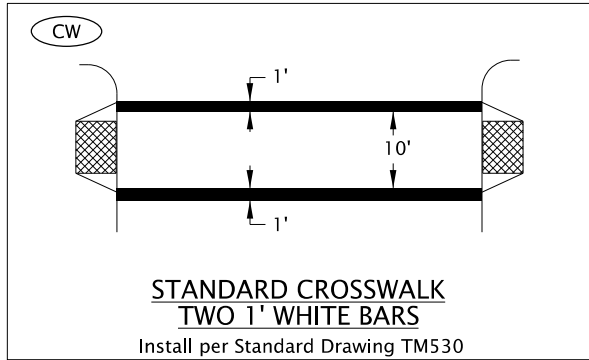


STANDARD CROSSWALK
TWO 1' WHITE BARS
Install per Standard Drawing TM530

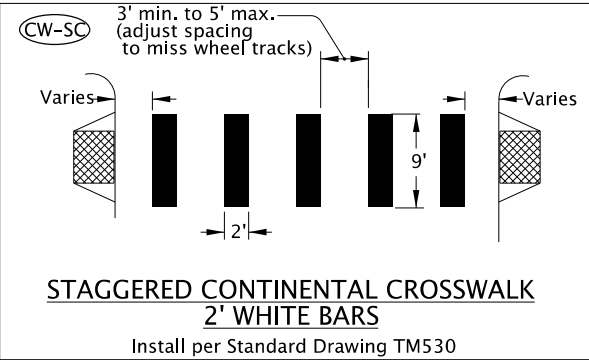


STAGGERED CONTINENTAL CROSSWALK
2' WHITE BARS
Install per Standard Drawing TM530

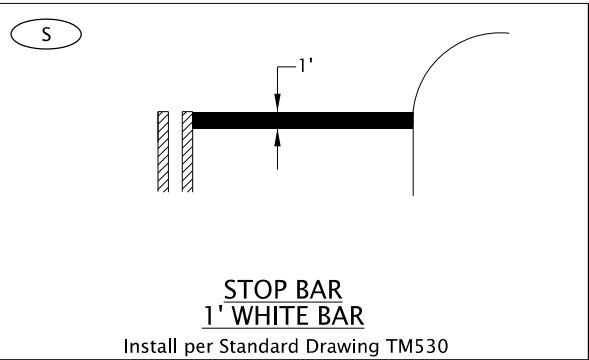


STOP BAR
1' WHITE BAR
Install per Standard Drawing TM530

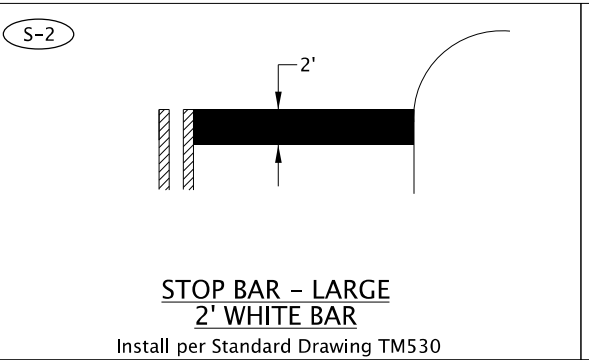


STOP BAR - LARGE
2' WHITE BAR
Install per Standard Drawing TM530

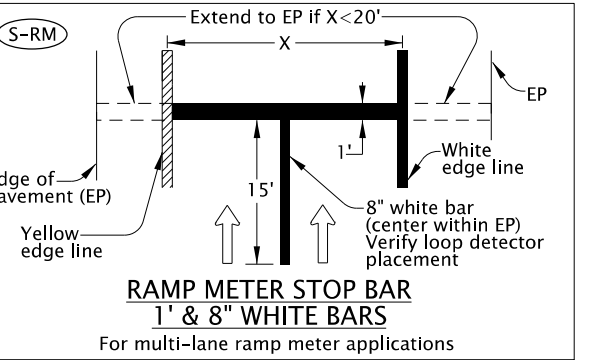


RAMP METER STOP BAR
1' & 8" WHITE BARS
For multi-lane ramp meter applications

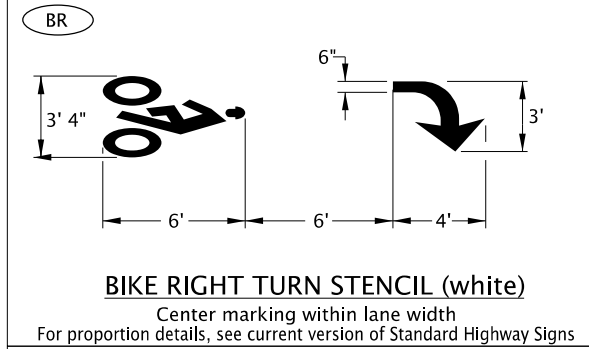


BIKE RIGHT TURN STENCIL (white)
Center marking within lane width
For proportion details, see current version of Standard Highway Signs

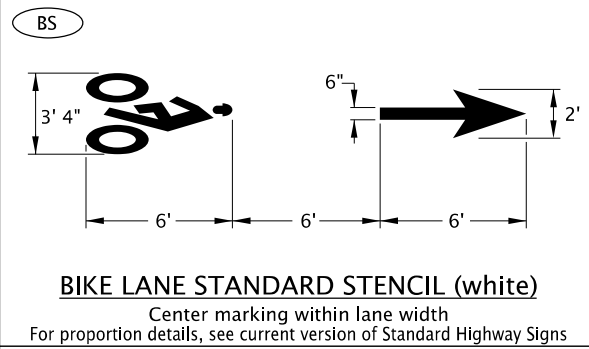


BIKE LANE STANDARD STENCIL (white)
Center marking within lane width
For proportion details, see current version of Standard Highway Signs

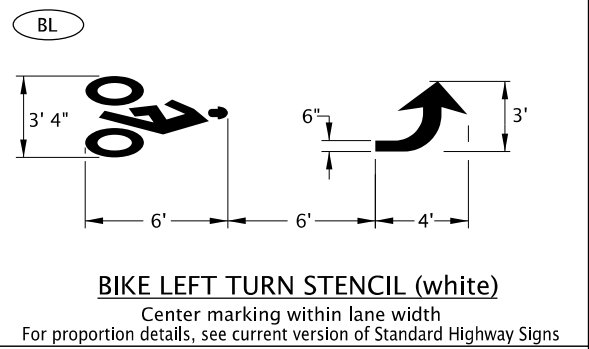


BIKE LEFT TURN STENCIL (white)
Center marking within lane width
For proportion details, see current version of Standard Highway Signs

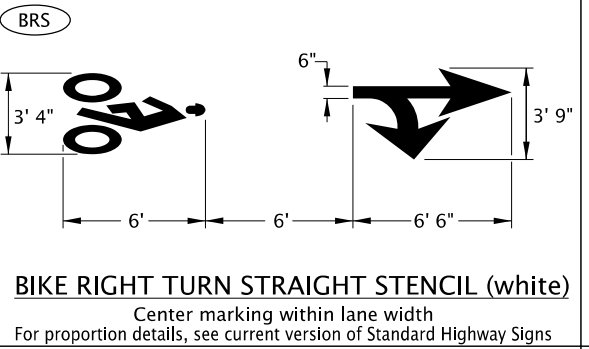


BIKE RIGHT TURN STRAIGHT STENCIL (white)
Center marking within lane width
For proportion details, see current version of Standard Highway Signs

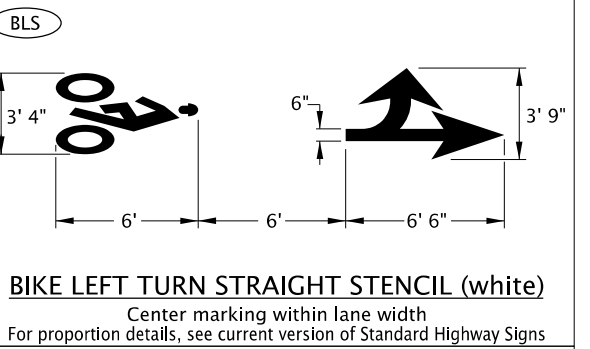


BIKE LEFT TURN STRAIGHT STENCIL (white)
Center marking within lane width
For proportion details, see current version of Standard Highway Signs

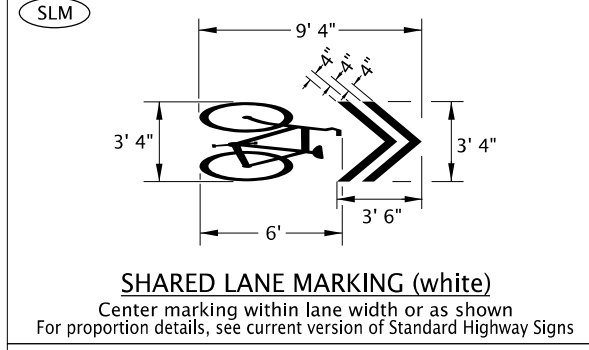


SHARED LANE MARKING (white)
Center marking within lane width or as shown
For proportion details, see current version of Standard Highway Signs

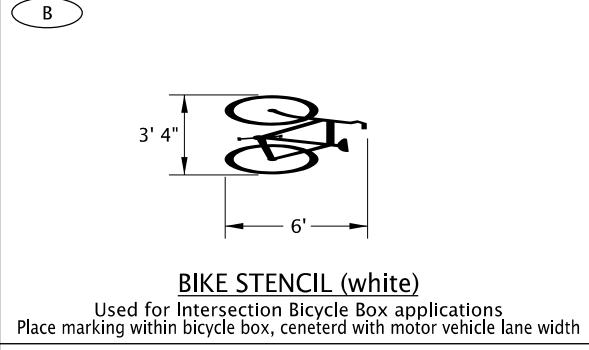


BIKE STENCIL (white)
Used for Intersection Bicycle Box applications
Place marking within bicycle box, centered with motor vehicle lane width

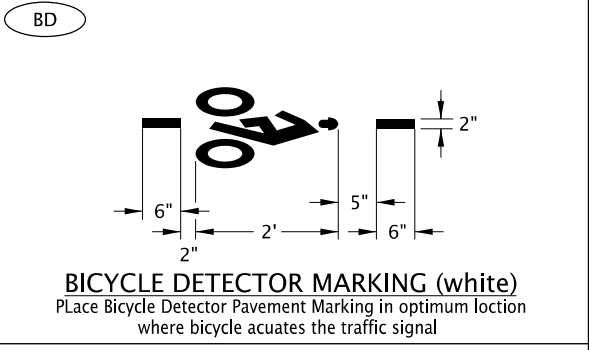


BICYCLE DETECTOR MARKING (white)
Place Bicycle Detector Pavement Marking in optimum location where bicycle acuates the traffic signal

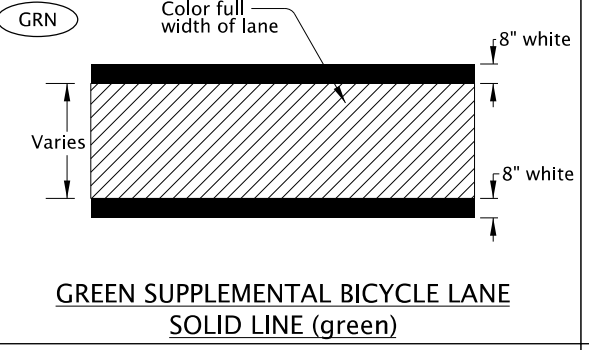


GREEN SUPPLEMENTAL BICYCLE LANE
SOLID LINE (green)

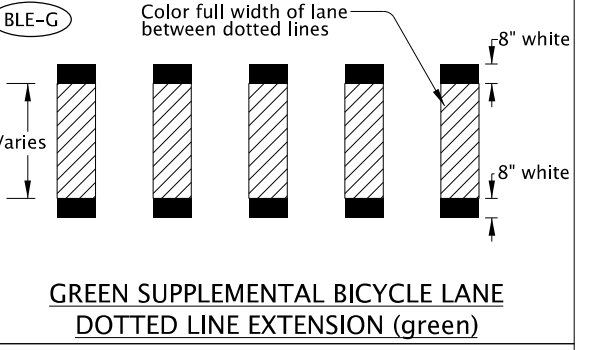


GREEN SUPPLEMENTAL BICYCLE LANE
DOTTED LINE EXTENSION (green)

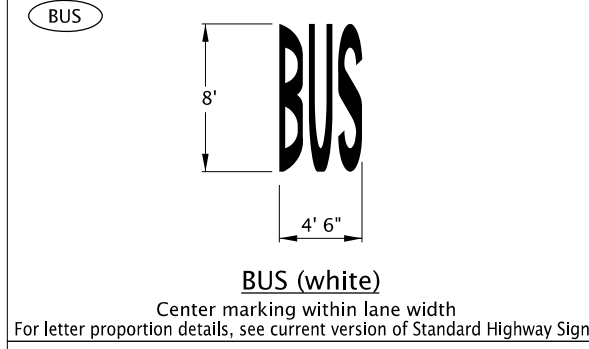


BUS (white)
Center marking within lane width
For letter proportion details, see current version of Standard Highway Signs

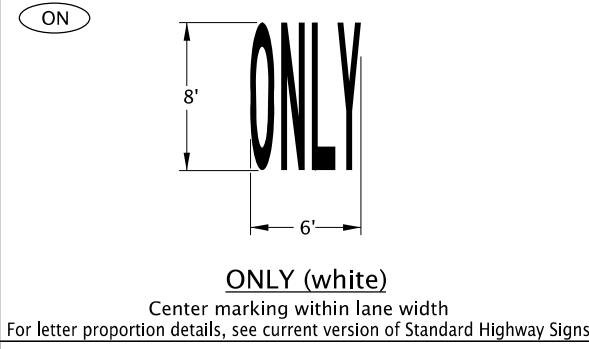


ONLY (white)
Center marking within lane width
For letter proportion details, see current version of Standard Highway Signs

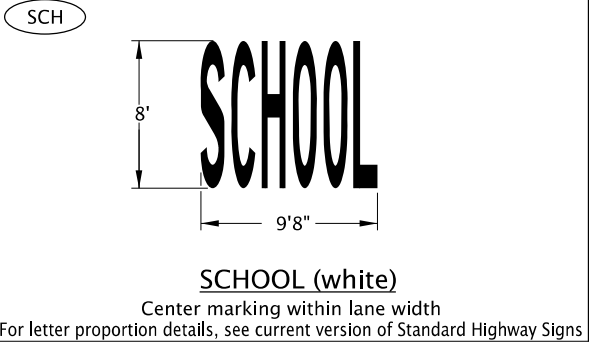


SCHOOL (white)
Center marking within lane width
For letter proportion details, see current version of Standard Highway Signs

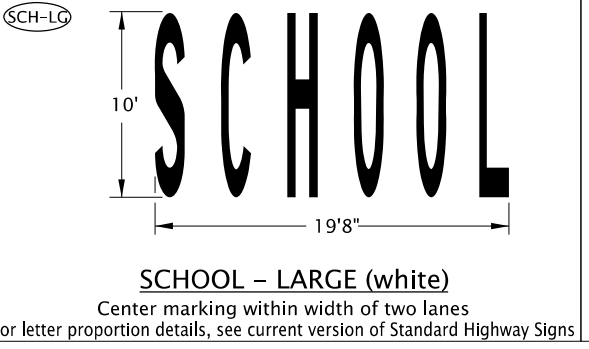


SCHOOL - LARGE (white)
Center marking within width of two lanes
For letter proportion details, see current version of Standard Highway Signs

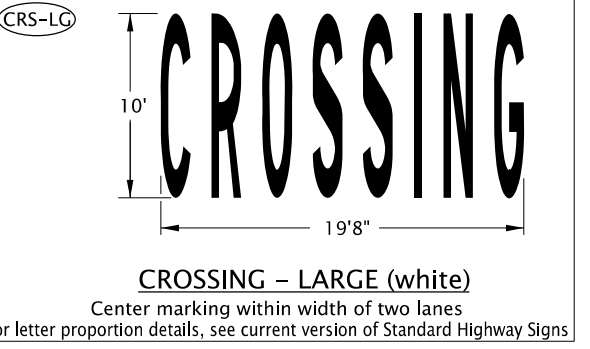

CROSSING - LARGE (white)
Center marking within width of two lanes
For letter proportion details, see current version of Standard Highway Signs

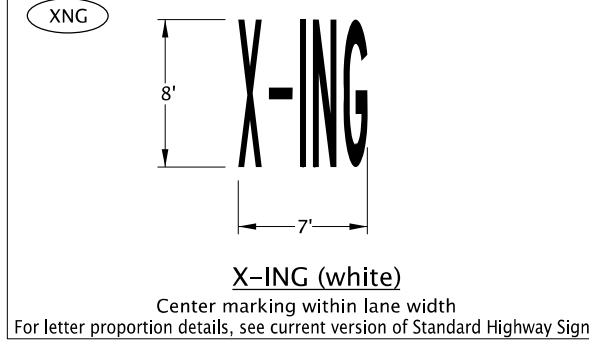

X-ING (white)
Center marking within lane width
For letter proportion details, see current version of Standard Highway Signs

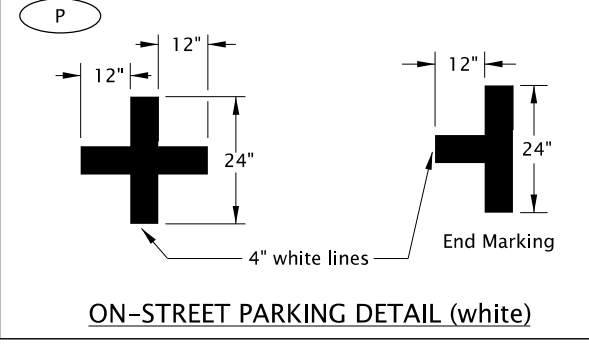

ON-STREET PARKING DETAIL (white)

General Note:
1. Arrow, letter, and bike symbol dimensions nominal.




CALC. BOOK NO. ___ N/A ___

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

| | |
|--|--|
| BASELINE REPORT DATE ___ 01/03/2020 ___ | |
| NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications. | |
| OREGON STANDARD DRAWINGS | |
| PAVEMENT MARKING | |
| STANDARD DETAIL BLOCKS | |
| 2018 | |
| DATE | REVISION DESCRIPTION |
| 07/18 | Added B, BD, GRN, BLE-G details |
| 01/20 | Added BRS and BLS. Rearranged layout and updated BS Modified GRN and BLE-G dimension notation Changed notes for B and BD |


TM503

TM530.dgn 1-3-2017

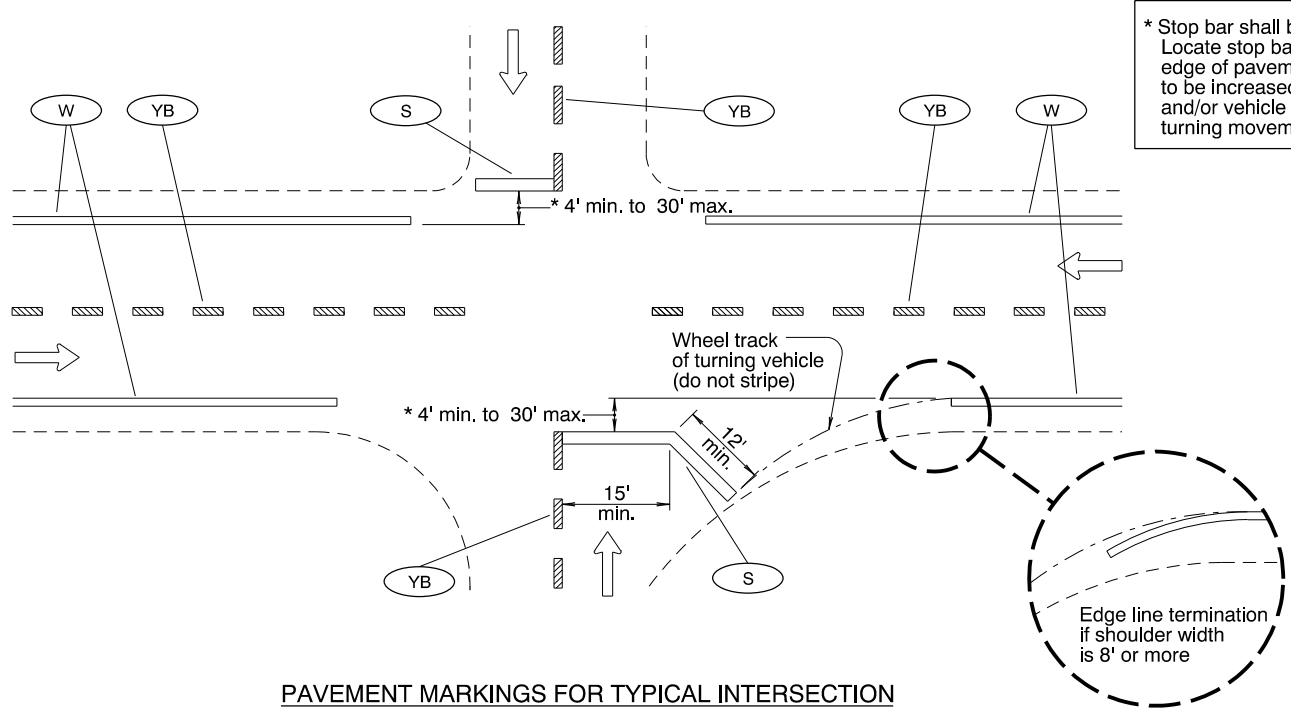


PAVEMENT MARKINGS FOR TYPICAL INTERSECTION

* Stop bar shall be placed as near as possible to the intersecting traveled way. Locate stop bar 4' min. to 30' max. in advance of the extended fog line, edge of pavement, or curb face. Minimum stop bar distance may need to be increased, depending on location of pedestrian ramps (see Detail "A") and/or vehicle turn radii (see Detail "B"). Field verify sight distance and truck turning movements.

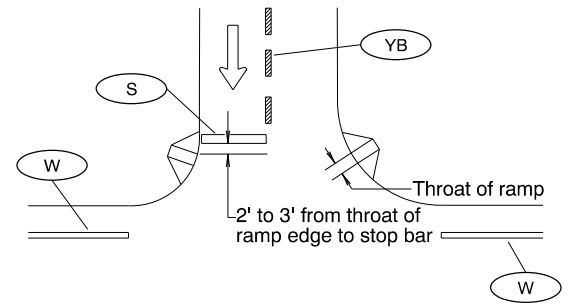


Detail "A"
STOP BAR PLACEMENT WITH RESPECT TO PEDESTRIAN RAMP

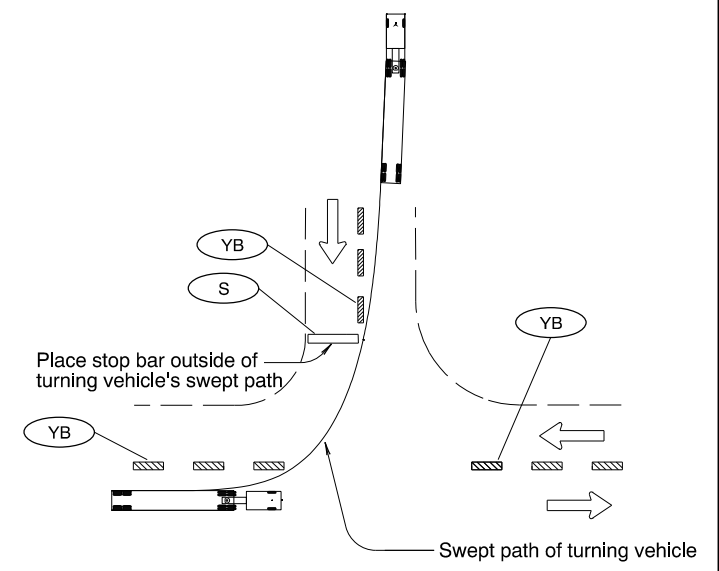


Detail "B"
STOP BAR PLACEMENT WITH RESPECT TO TURN RADII

TM530

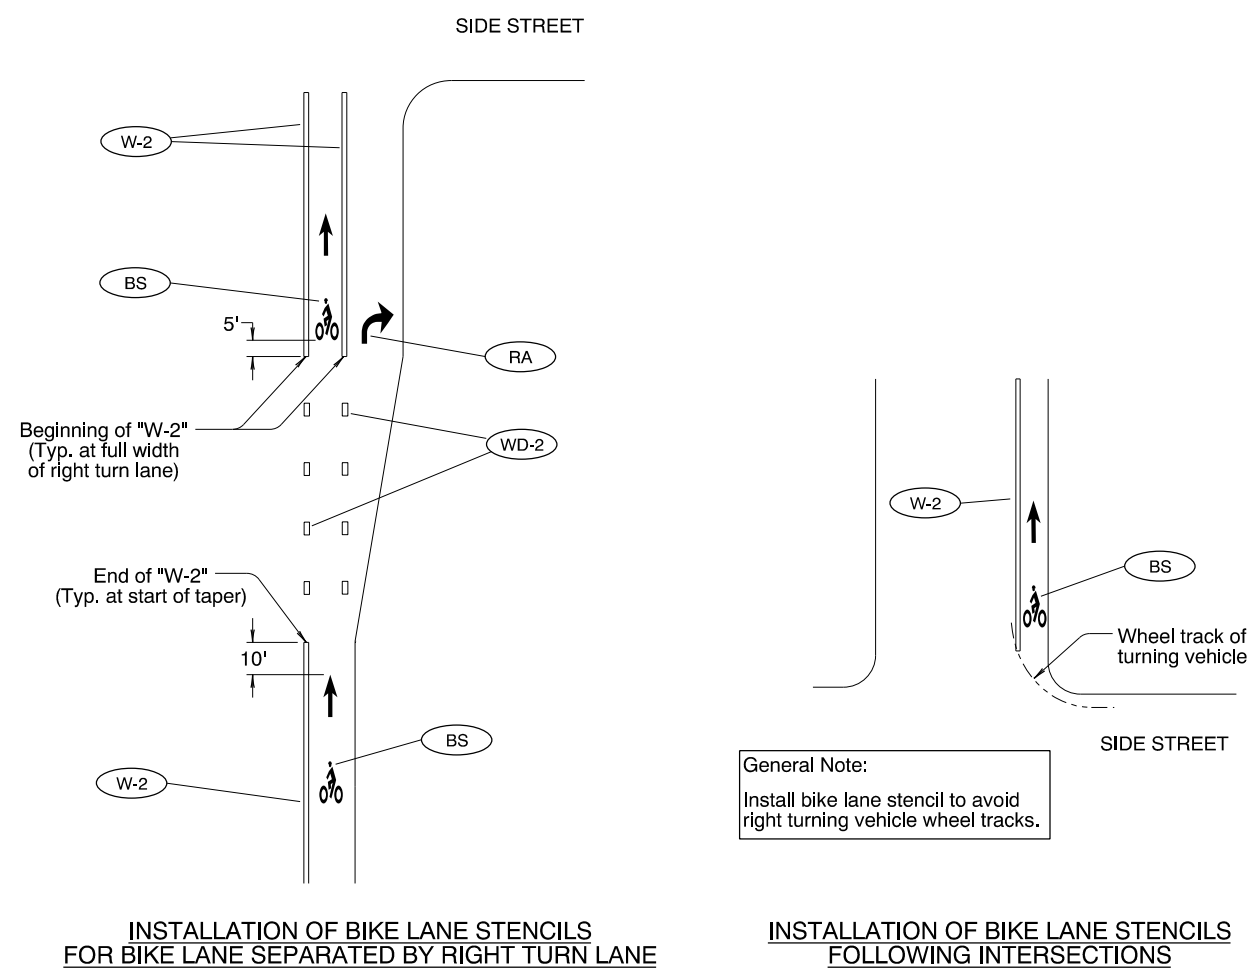


INSTALLATION OF BIKE LANE STENCILS FOR BIKE LANE SEPARATED BY RIGHT TURN LANE

INSTALLATION OF BIKE LANE STENCILS FOLLOWING INTERSECTIONS

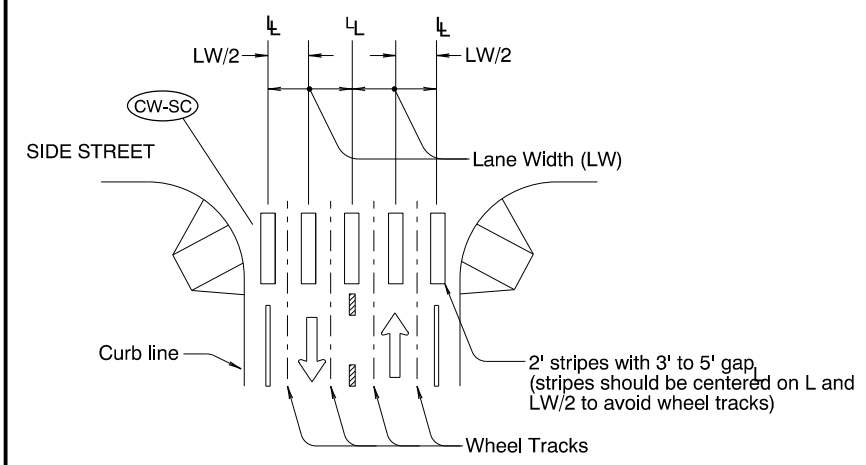

STAGGERED CONTINENTAL LAYOUT

General Note:
1. Install crosswalk bars such that the throat of the ADA ramp is entirely within crosswalk markings, or 5' back of extended fog line, edge of pavement, or curb face.

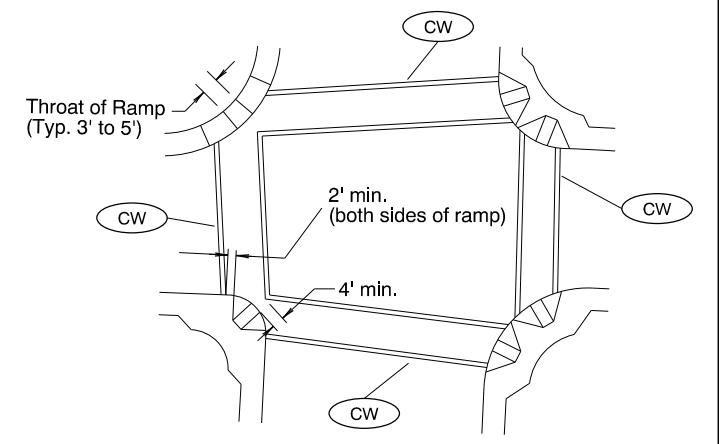



STANDARD CROSSWALK BARS AT INTERSECTION

To be accompanied by Standard Dwg. Nos. TM500 thru TM503


| | |
|--|-----------------------------------|
| CALC. BOOK NO. N/A | BASELINE REPORT DATE July 8, 2016 |
| NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications | |
| OREGON STANDARD DRAWINGS INTERSECTION PAVEMENT MARKINGS (CROSSWALK, STOP BAR & BIKE LANE STENCIL) | |
| 2018 | |
| DATE | REVISION DESCRIPTION |
| | |
| | |
| | |

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

LEGEND
 Direction of Travel
 L - Lane line dimensions are shown on the striping plans

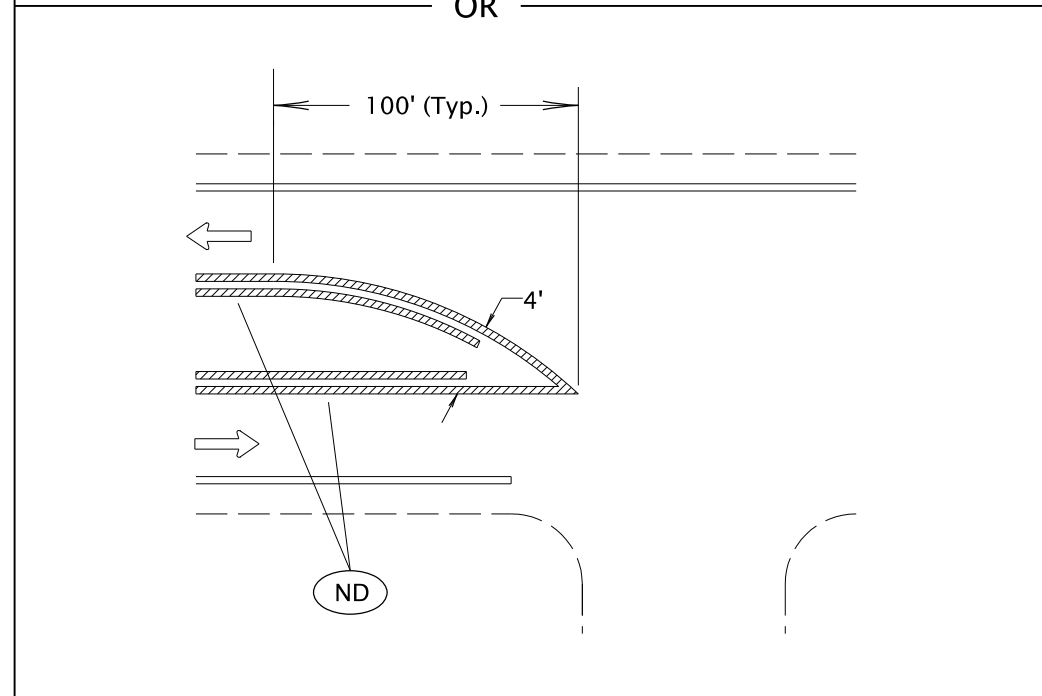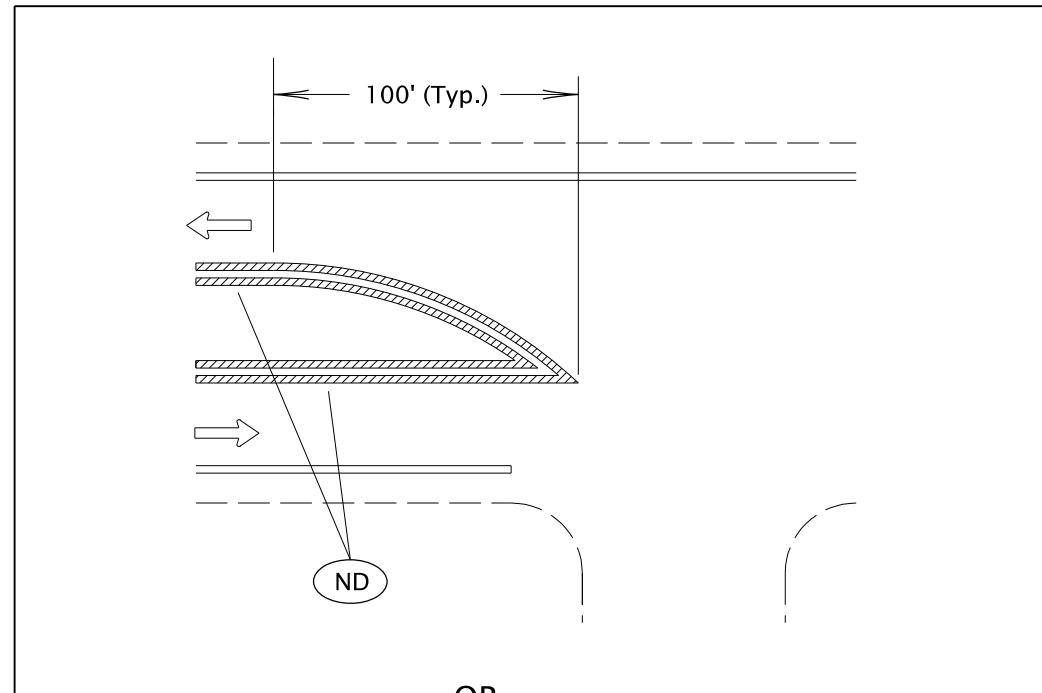

MEDIAN BULLNOSE DETAIL

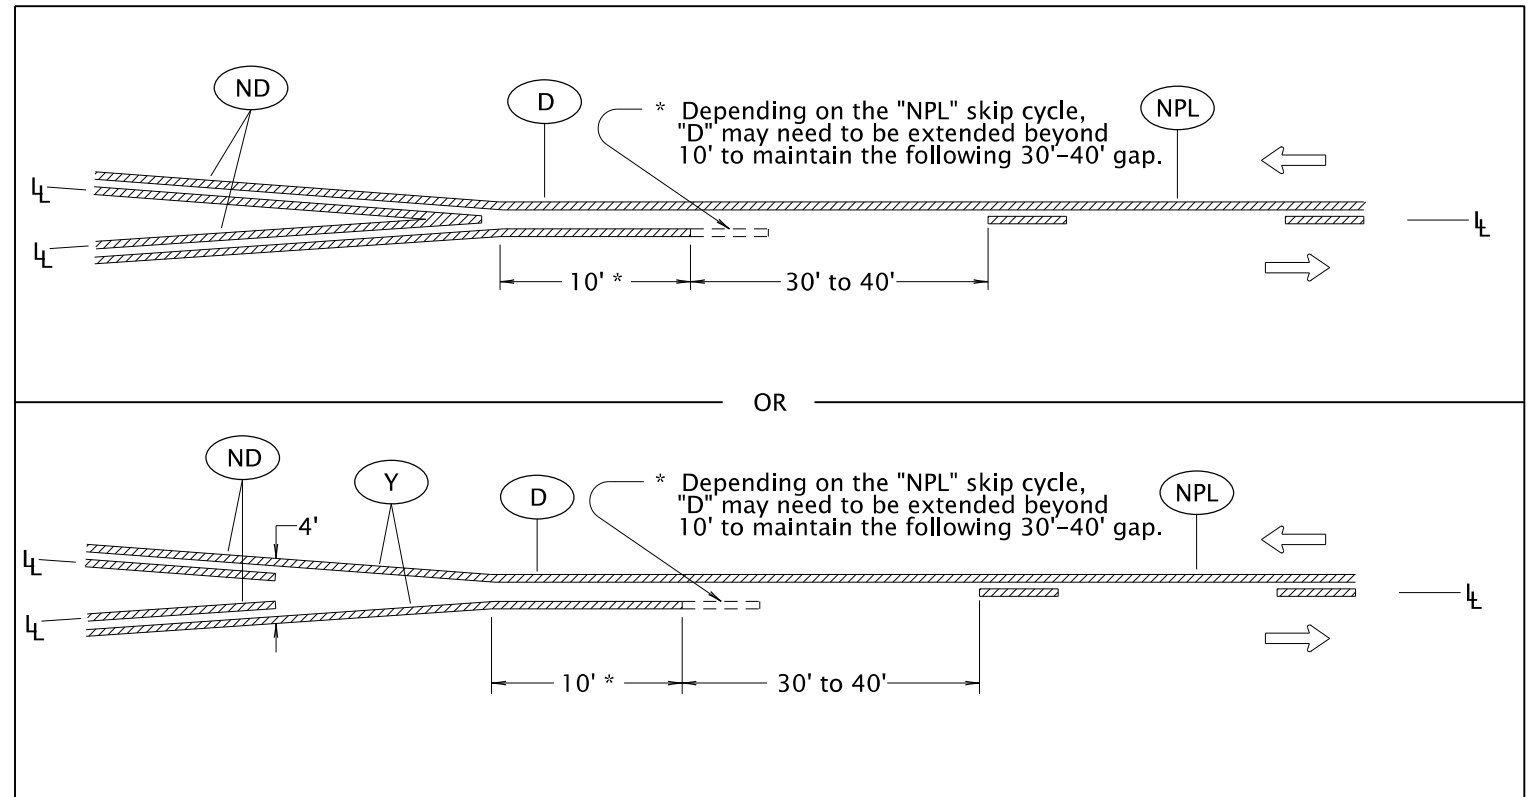

MEDIAN WIDTH TRANSITION
(TWO NARROW DOUBLE YELLOW LINES TO ONE-DIRECTION NO-PASSING LINE)

To be accompanied by Standard Dwg. Nos. TM500 thru TM503

| CALC. BOOK NO. <u> N/A </u> | BASELINE REPORT DATE <u> 07/01/2015 </u> | | | | | | | | | |
|---|--|------|----------------------|--|--|--|--|--|--|--|
| <p><i>The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.</i></p> | NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications. | | | | | | | | | |
| | OREGON STANDARD DRAWINGS | | | | | | | | | |
| | MEDIAN AND LEFT TURN CHANNELIZATION DETAILS | | | | | | | | | |
| | 2018 | | | | | | | | | |
| | <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 10%;">DATE</th> <th>REVISION DESCRIPTION</th> </tr> </thead> <tbody> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </tbody> </table> | DATE | REVISION DESCRIPTION | | | | | | | |
| DATE | REVISION DESCRIPTION | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |
| | | | | | | | | | | |


LEGEND

Increasing stationing from left to right


← Direction of Travel

⊥ Lane line dimensions are shown on the striping plans


TM539

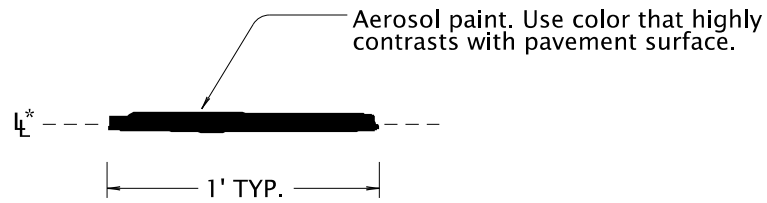

CONTROL POINT

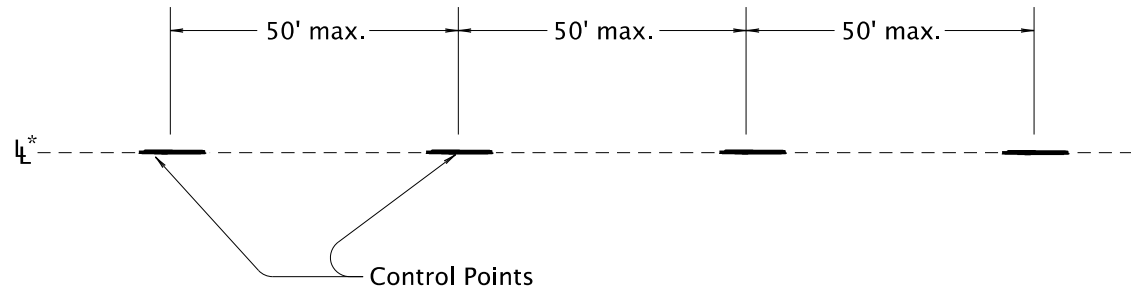

CONTROL POINT LAYOUT - TANGENT SECTIONS

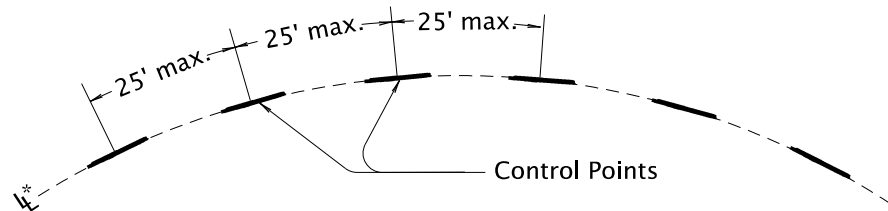

CONTROL POINT LAYOUT - CURVE SECTIONS

General note:

1.) Use control points to make continuous narrow guideline as specified.

* Control points are placed along the lane line for all longitudinal lines except the following:

ND For center lines only A control point layout 4" offset from the lane line is required for a ND line when used as a center line.


TM560

LEGEND

L* - Lane line dimensions are shown on the striping plans.

To be accompanied by Standard Dwg. Nos. TM500 thru TM503

| | |
|---|--|
| CALC. BOOK NO. _ _ _ N/A _ _ _ _ _ | BASELINE REPORT DATE _ _ 07/01/2015 _ _ _ _ _ |
| <p><i>The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.</i></p> | NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications. |
| | OREGON STANDARD DRAWINGS |
| | ALIGNMENT LAYOUT: GENERAL |
| | 2018 |
| DATE | REVISION DESCRIPTION |
| | |
| | |
| | |

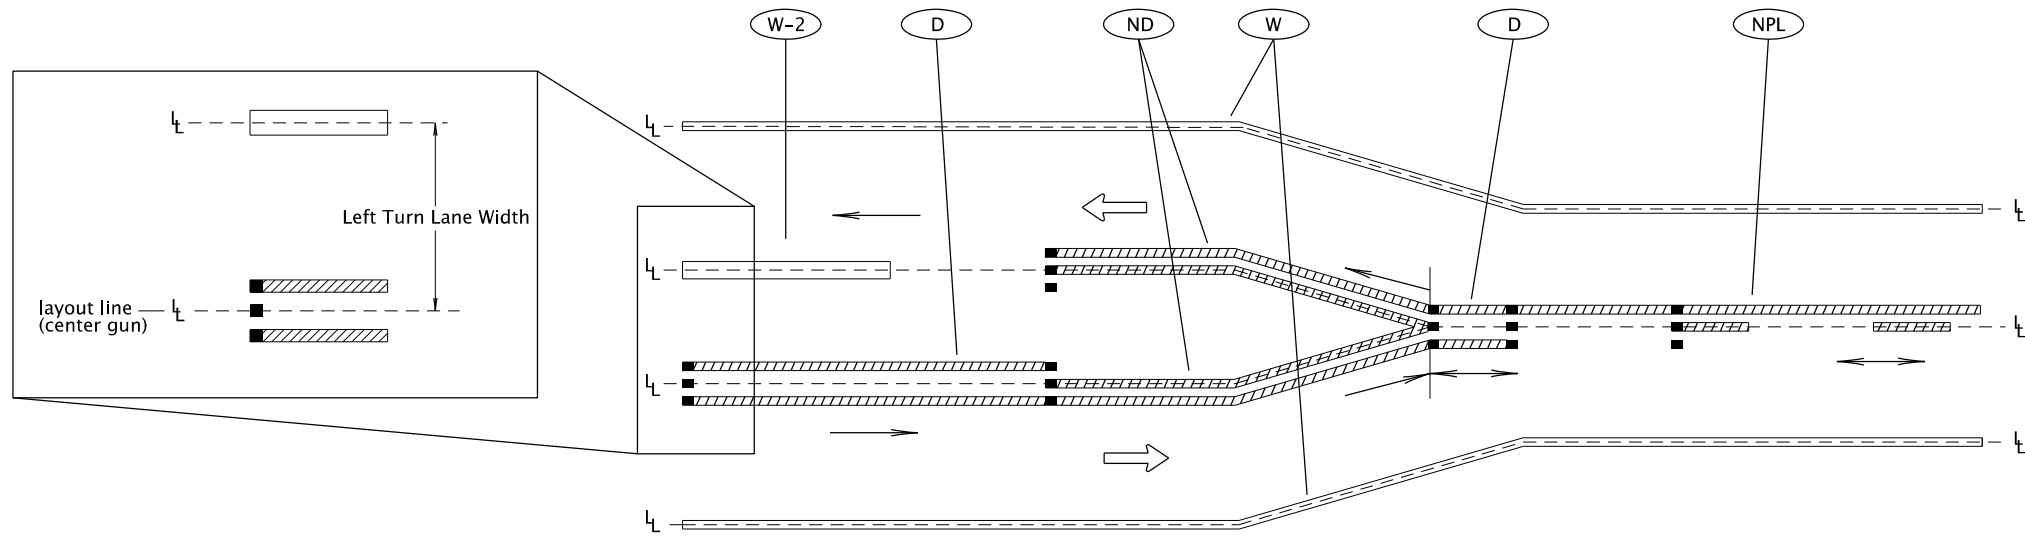


LEFT TURN LANE ALIGNMENT LAYOUT

- General note:
- 1) Install control points for pavement marking alignment layout along the center gun location.
 - 2) Increasing stationing from left to right

LEGEND


- ← Direction Of Travel and Thru Traffic Side.
- └ Lane line dimensions are shown on the striping plans.
- ↔ Direction of striping truck (may go either direction)
- Direction of striping truck (may go one direction only)
- Three gun installation system (center dot represents center gun)

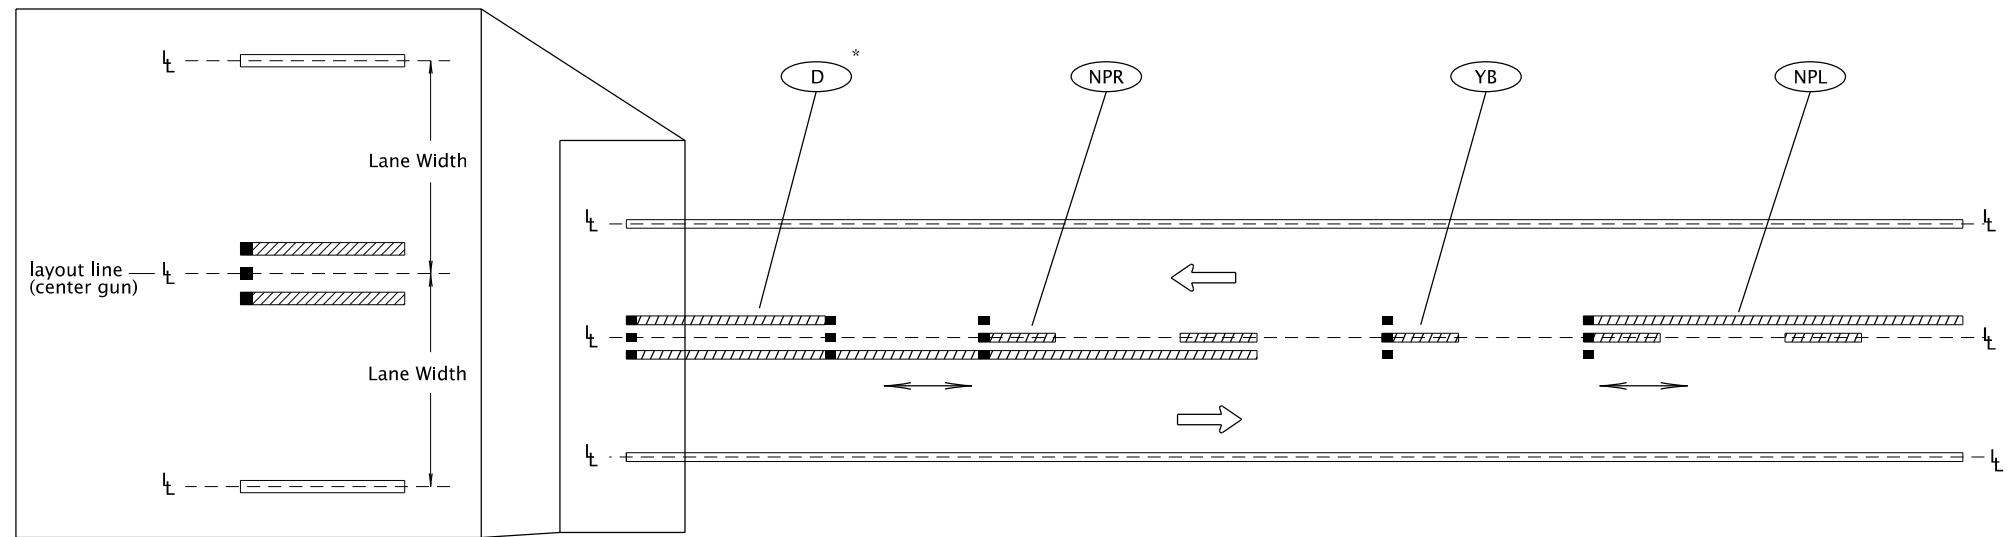


CENTERLINE ALIGNMENT LAYOUT

*When ND is used as centerline markings, a control point layout 4" offset from the lane line is required.

Line Types requiring control points to be 4" offset from lane line:
ND
For centerlines only

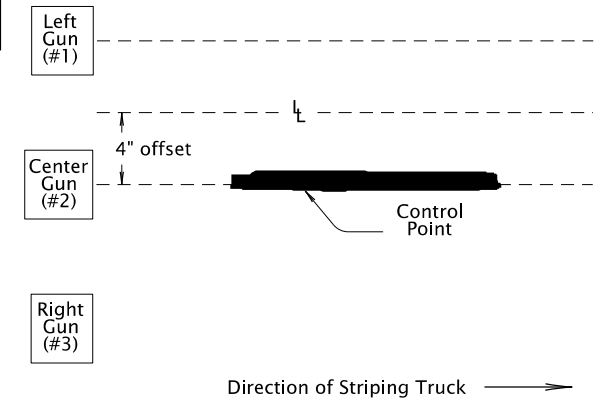

4" Offset of Lane Line and Center Gun

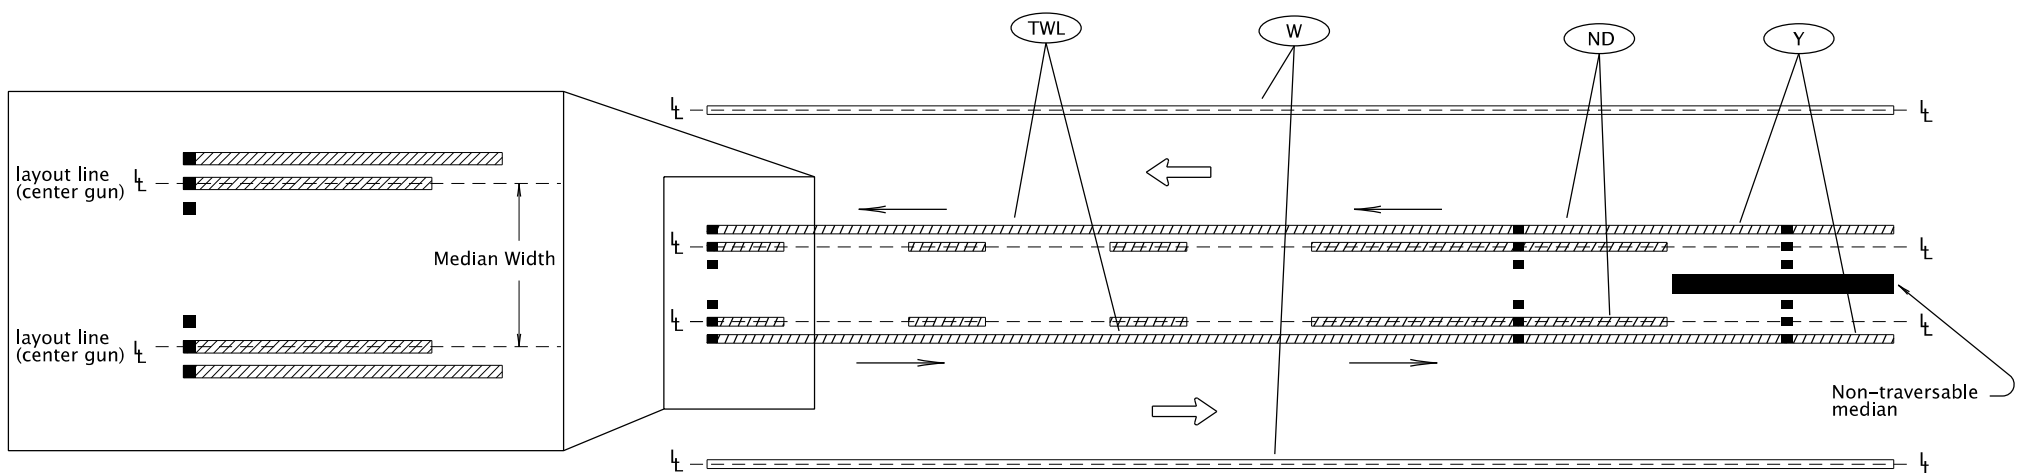

MEDIAN ALIGNMENT LAYOUT

To be accompanied by Standard Dwg. Nos. TM500 thru TM503

CALC. BOOK NO. ___ N/A ___ BASELINE REPORT DATE ___ 07/01/2015 ___

NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications.


OREGON STANDARD DRAWINGS
ALIGNMENT LAYOUT:
LEFT TURN LANE,
CENTERLINE & MEDIANS

2018

| DATE | REVISION DESCRIPTION |
|------|----------------------|
| | |
| | |
| | |


The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

tm635.dgn 10-JUL-2017

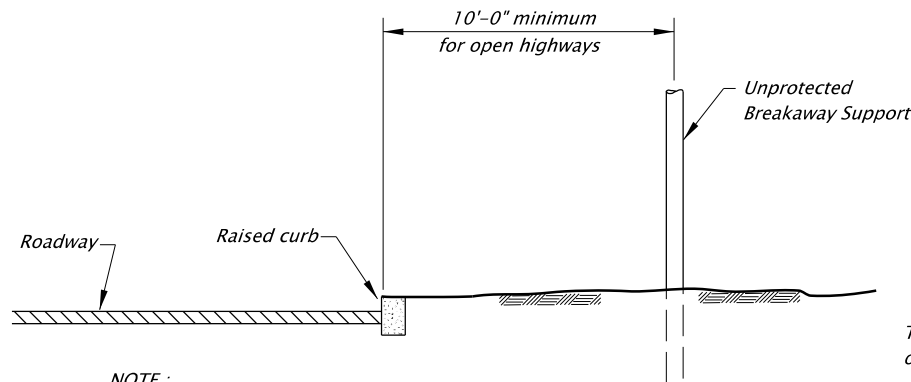


NOTE:
Locate supports far enough behind curb to allow vehicle to stabilize before impacting support.

BREAKAWAY SUPPORTS BEHIND RAISED CURBS

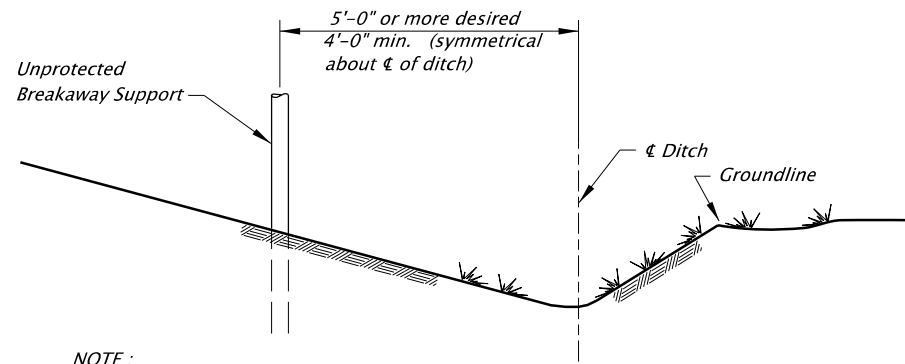


NOTE:
Locate breakaway supports away from ditches to avoid problems with erosion, corrosion, debris, maintenance, and breakaway performance.

BREAKAWAY SUPPORTS NEAR DITCHES

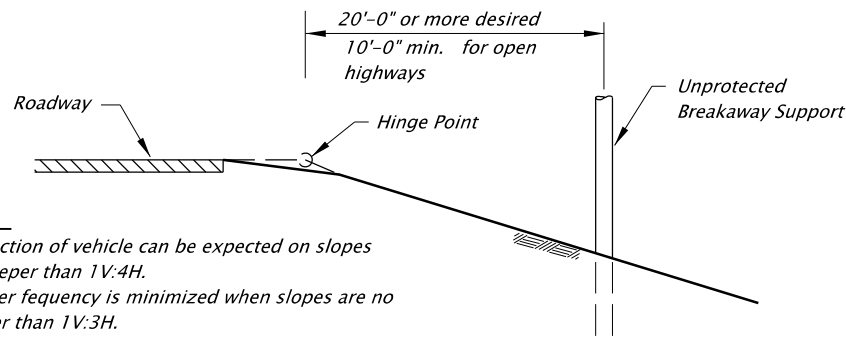


NOTE:
Redirection of vehicle can be expected on slopes no steeper than 1V:4H.
Rollover frequency is minimized when slopes are no steeper than 1V:3H.
Locate support beyond hinge point as shown to allow vehicle to stabilize before impact.

BREAKAWAY SUPPORT ON FILL SLOPE

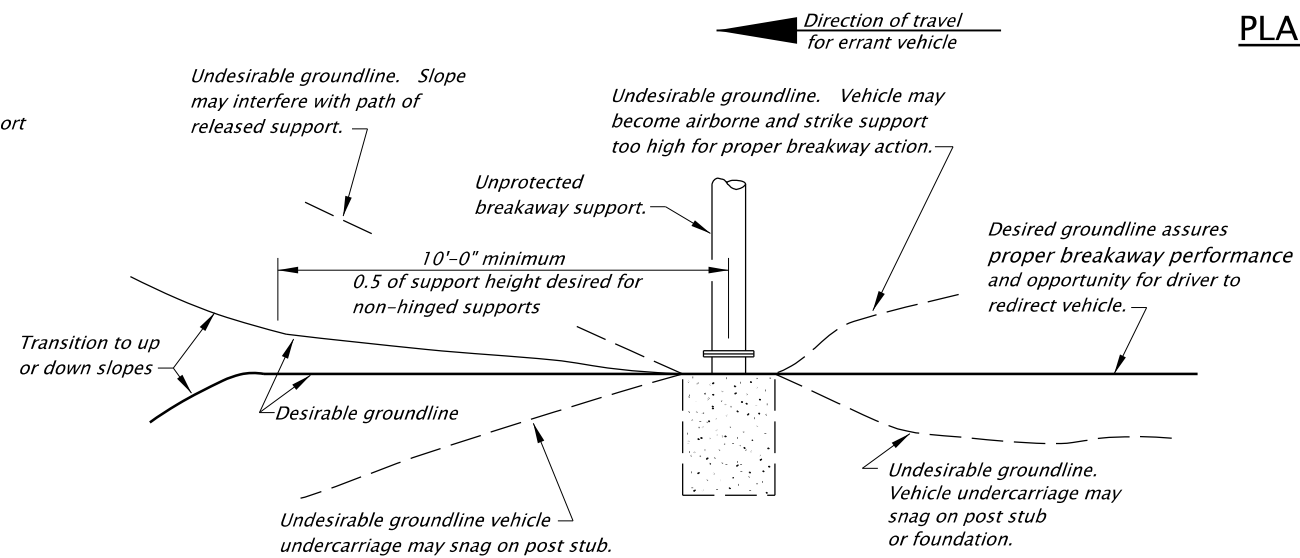


BREAKAWAY SUPPORT - PARTIAL ELEVATION

(Along possible paths of errant vehicles)

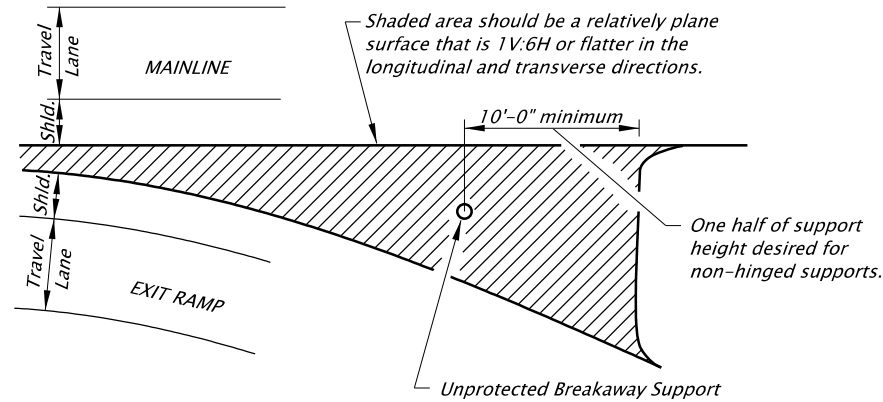

GORE AREA BREAKAWAY SUPPORT LOCATION

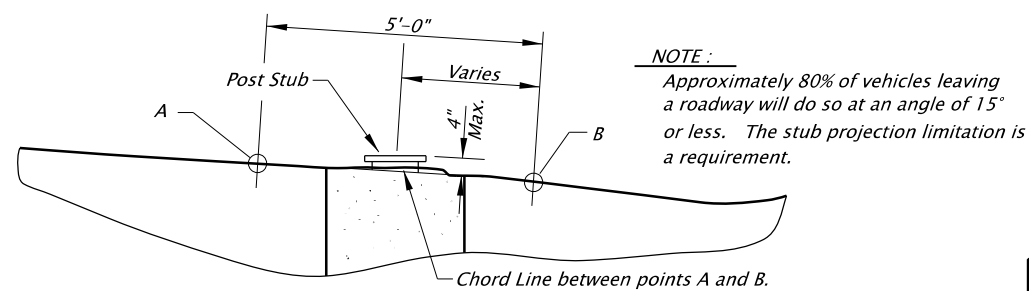

NOTE:
Approximately 80% of vehicles leaving a roadway will do so at an angle of 15° or less. The stub projection limitation is a requirement.

UNPROTECTED BREAKAWAY SUPPORT CLEARANCE DIAGRAM

Section perpendicular to assumed path of errant vehicle. (Most likely path is a 15° angle from adjacent traffic flow)

PLACEMENT OF UNPROTECTED BREAKAWAY SUPPORTS:


The location of unprotected breakaway supports with respect to the travel lane(s) and the roadside terrain and other geometric conditions over which the vehicle travels before impacting the support will affect the support's breakaway performance. Breakaway supports located in gore areas are particularly vulnerable to vehicle impacts. Breakaway supports located across tee intersections, at the end of lane drop or on the outside of horizontal curves are also likely to be struck. Locating breakaway supports in these areas should be avoided if possible. If the breakaway support must be located in these areas, locate them to produce an impact situation that is as forgiving as possible while assuring adequate recovery space beyond the support(s). Breakaway supports placed up on cut slopes generally result in a safer impact situation than for those placed down on fill slopes. The support placed on a cut slope will be lighter than a support placed on fill slope. The momentum of a vehicle traversing a cut slope will generally be less than that for a vehicle traversing a fill slope. A vehicle going up a cut slope is generally more stable and more easily redirected than a vehicle going down a fill slope. Placement of breakaway supports in or near ditches should be avoided. Breakaway supports should not be located near raised curbs or near the hinge point of the fill slope. Where possible, supports should be located behind established barriers. The guidelines contained herein should be used if possible. However, adjustments to the guidelines may be necessary because of right-of-way and/or other constraints. See TM200 requirements when signs are mounted on unprotected Breakaway Supports.

| | | | |
|---|----------------------|---|--|
| CALC. BOOK NO. _____ | | BASELINE REPORT DATE <u>06-JUL-2015</u> | |
| NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications | | | |
| OREGON STANDARD DRAWINGS | | | |
| BREAKAWAY SIGN & LUMINAIRE SUPPORTS - SUPPORT LOCATION GUIDELINES | | | |
| 2018 | | | |
| DATE | REVISION DESCRIPTION | | |
| | | | |
| | | | |
| | | | |


The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

TM671.dgn 10-JUL-2017

TM671

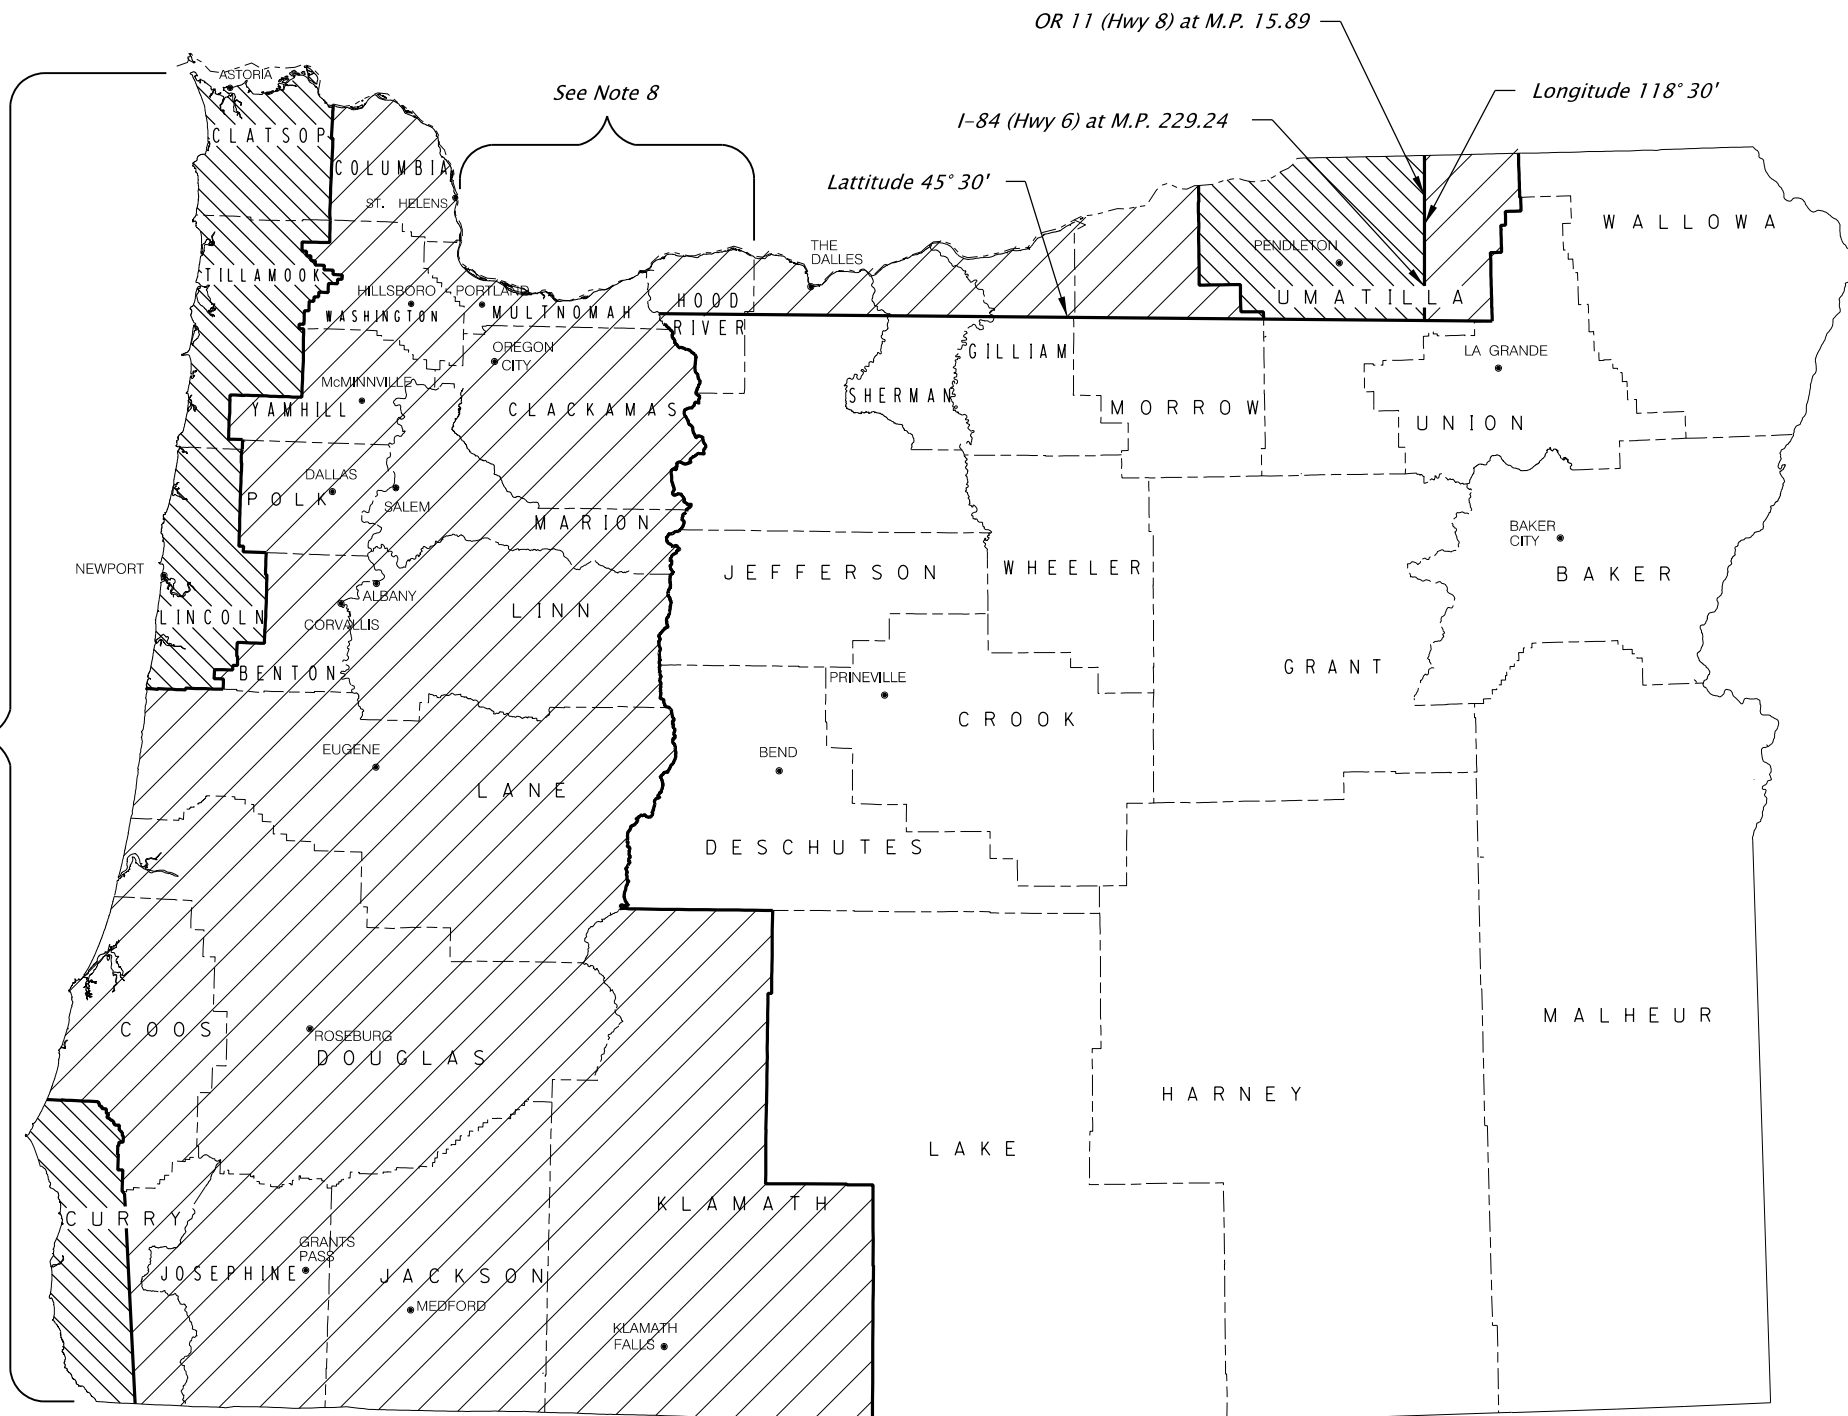


See Note 7




NOTES:

1. The wind velocity map as shown is adapted from AASHTO 2001 4th Edition - "Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals", Appendix C, Figure C-3 and Section 3, Figure 3-2. It uses the wind speed map shown in Figure 1609 of the 2007 Oregon Structural Code to account for locations in the State with special wind regions.
2. The wind velocities shown above are 3-Second Gust wind velocities.
3. The Exposure Category is C.
4. The mean recurrence interval is 50-Years.
5. Mountainous terrain, gorges, and ocean promontories are classified as special wind regions and shall be examined for unusual wind conditions.
6. The Interval Height (Kz) is 30 ft.
7. All areas with full exposure to ocean winds shall be designated 110 mph areas.
8. Areas in Multnomah and Hood River counties with full exposure to Columbia River Gorge winds shall be designated 110 mph areas.
9. Localities may have adopted wind speed higher than shown on this map. Those higher wind speed shall be used.


| | |
|---|---|
| CALC. BOOK NO. _____ | BASELINE REPORT DATE <u>06-JAN-2012</u> |
| <p><i>The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.</i></p> | NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications |
| | OREGON STANDARD DRAWINGS |
| | 3 SECOND GUST WIND SPEED MAP |
| | 2018 |
| DATE | REVISION DESCRIPTION |
| | |
| | |
| | |

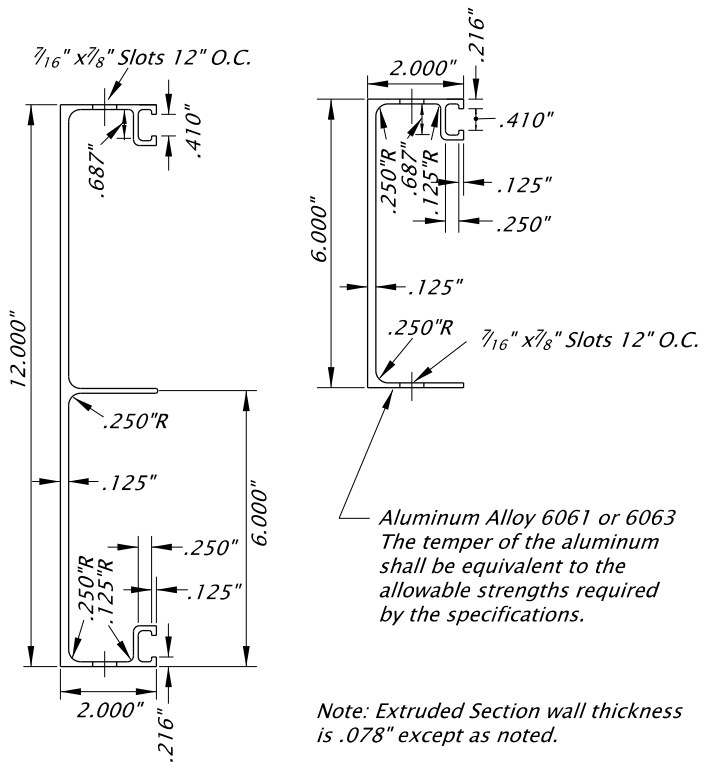


SIGN PANELS & DETAILS

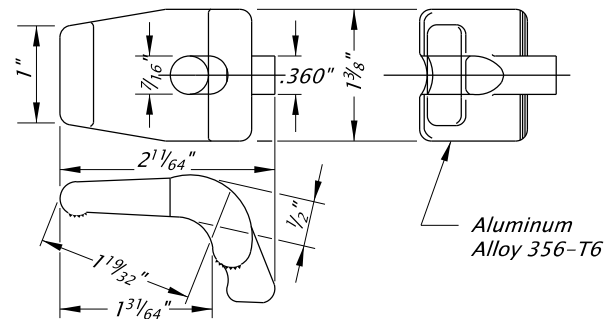

POST CLIP DETAIL

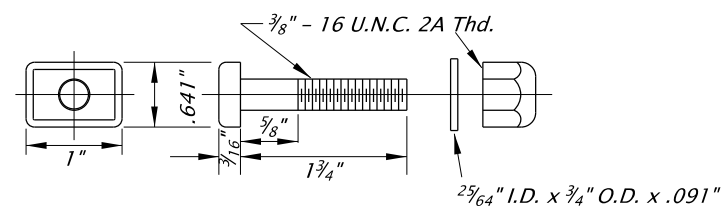


POST CLIP BOLT, NUT, & WASHER DETAIL

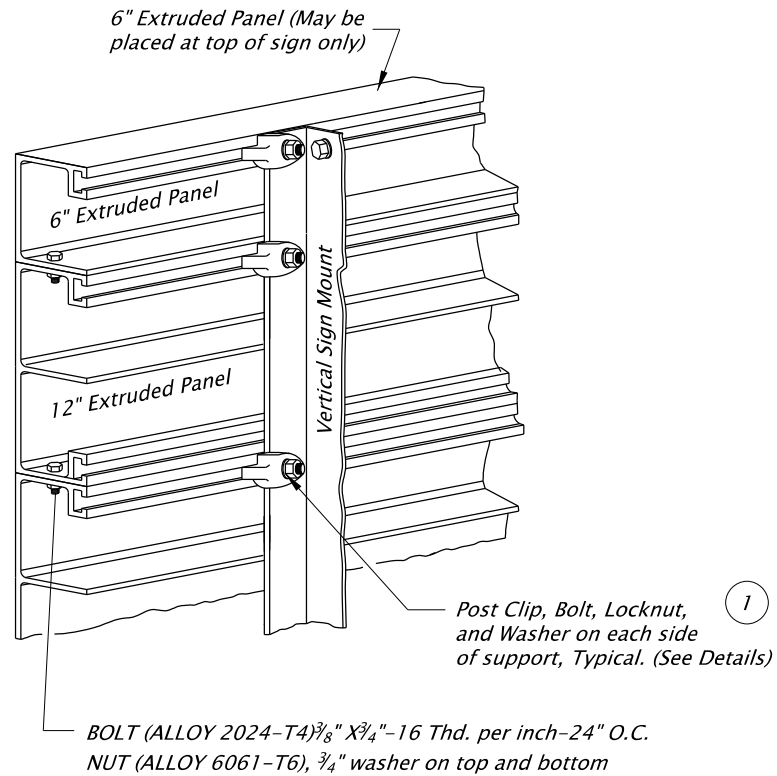


SIGN PANELS ON METAL STRUCTURES
No Scale


① Note:
The locking feature of the nut shall be a nylon insert.

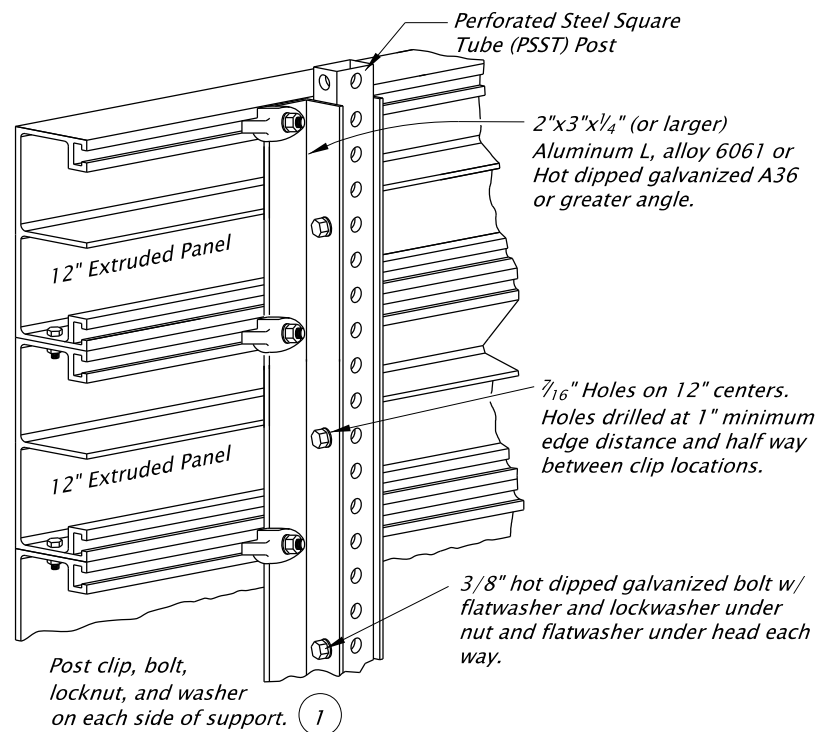

SIGN PANELS ON PERFORATED STEEL SQUARE TUBE (PSST) POSTS
No Scale

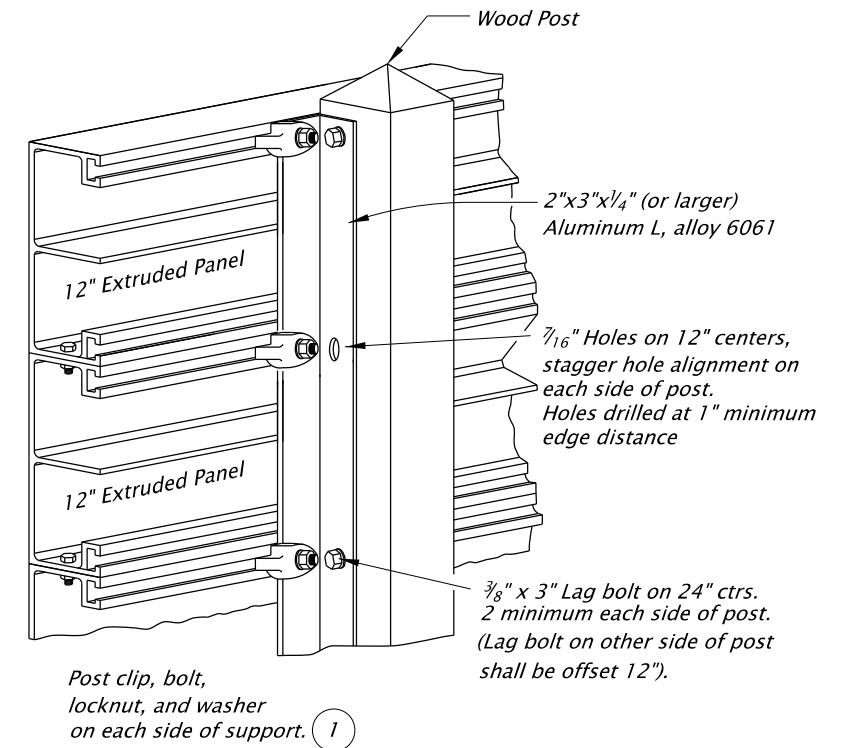


SIGN PANELS ON WOOD POSTS
No Scale

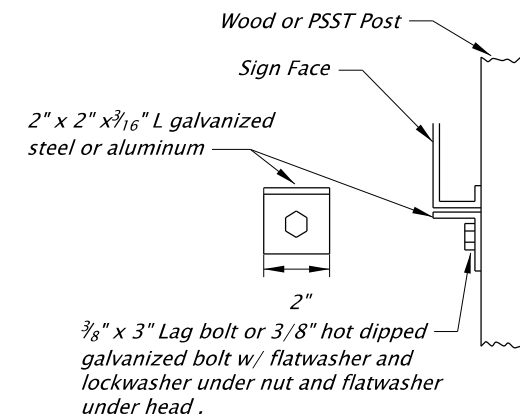

SIGN SUPPORT BRACKET DETAIL
1 Required per post

| | |
|--|---|
| CALC. BOOK NO. _____ | BASILINE REPORT DATE <u>06-JAN-2017</u> |
| <p>The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.</p> | NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications |
| | OREGON STANDARD DRAWINGS |
| | EXTRUDED ALUMINUM PANELS |
| | 2018 |
| DATE | REVISION DESCRIPTION |
| | |
| | |
| | |

tm676.dgn 10-JUL-2017

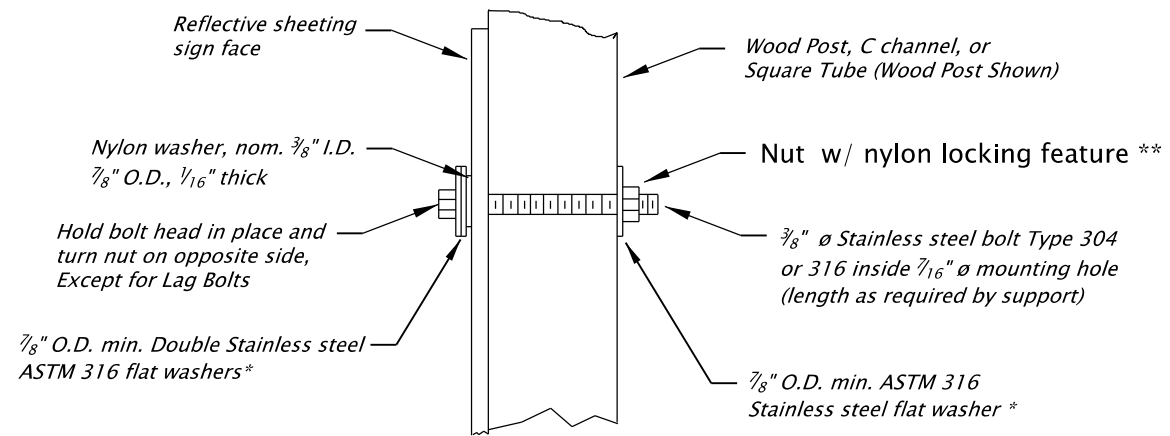

Note:
 1) When signs are placed on opposing sides of post, 3/8" x 3" lag bolts can be used instead of through bolt.
 2) Use nylon and stainless steel washers when signs are placed on both sides of post.
 3) Burr threads at junction with nut when locknuts are not used.
 4) Post bolts to extend beyond the tightened nuts within the limits of 1/4" to 1".


* Stainless steel bonded sealing washer with neoprene layer is an acceptable substitute
 ** Acceptable substitute for nylon locking nuts:
 ANCO PIN-LOC
 TRI-LOC® Top Lock Locknut

SIGN ATTACHMENT DETAIL


TM676

| CALC. BOOK NO. _____ | BASELINE REPORT DATE <u>06-JUL-2015</u> | | | | | | | | | | |
|---|--|------|----------------------|--|--|--|--|--|--|--|--|
| <p><i>The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.</i></p> | NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications | | | | | | | | | | |
| | OREGON STANDARD DRAWINGS | | | | | | | | | | |
| | SIGN ATTACHMENTS | | | | | | | | | | |
| | 2018 | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>DATE</th> <th>REVISION DESCRIPTION</th> </tr> </thead> <tbody> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> <tr><td> </td><td> </td></tr> </tbody> </table> | DATE | REVISION DESCRIPTION | | | | | | | | |
| DATE | REVISION DESCRIPTION | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |
| | | | | | | | | | | | |



tm678.dgn 10-JUL-2017

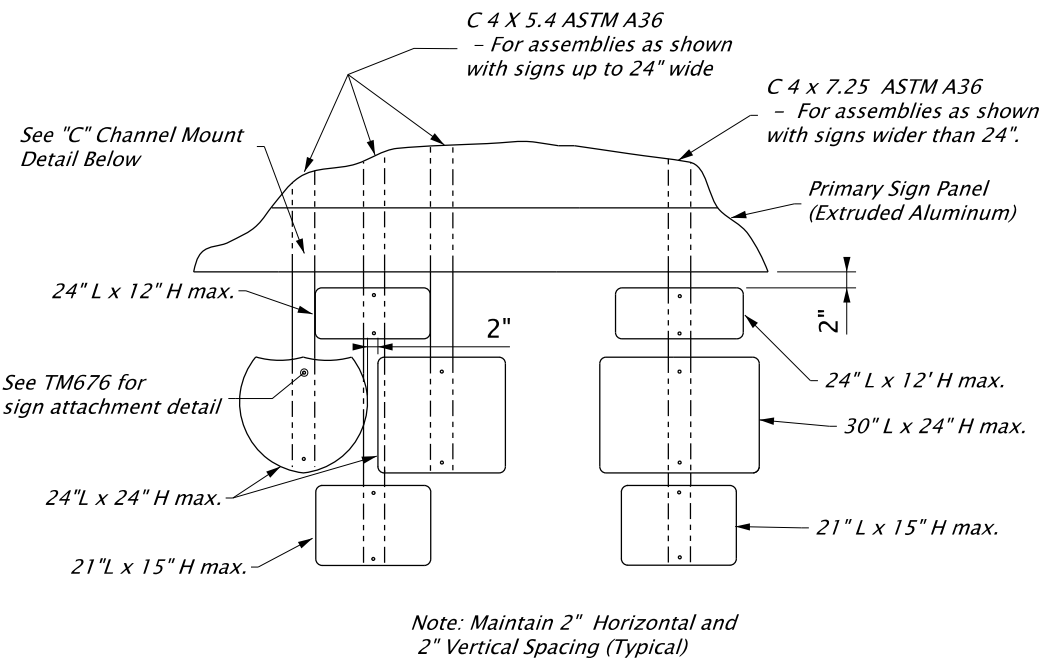

ROUTE MARKERS MOUNTED TO EXTRUDED PANELS
No Scale

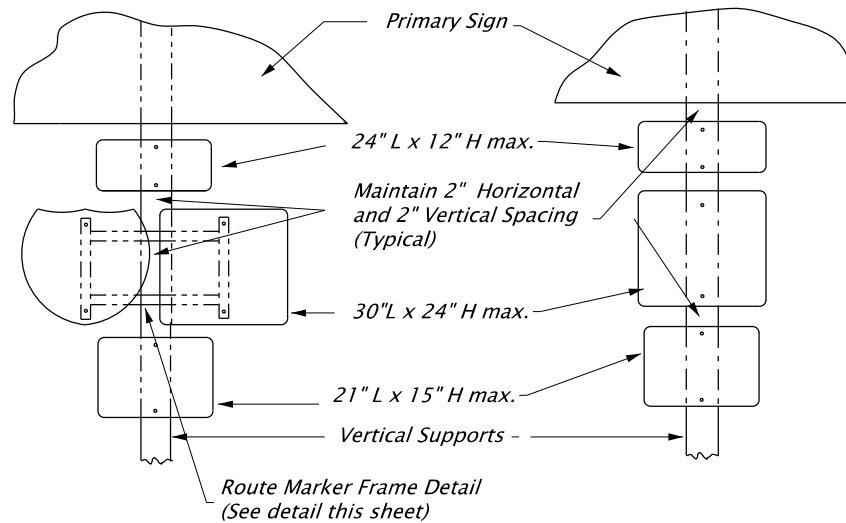

ROUTE MARKERS MOUNTED TO VERTICAL SUPPORTS
No Scale

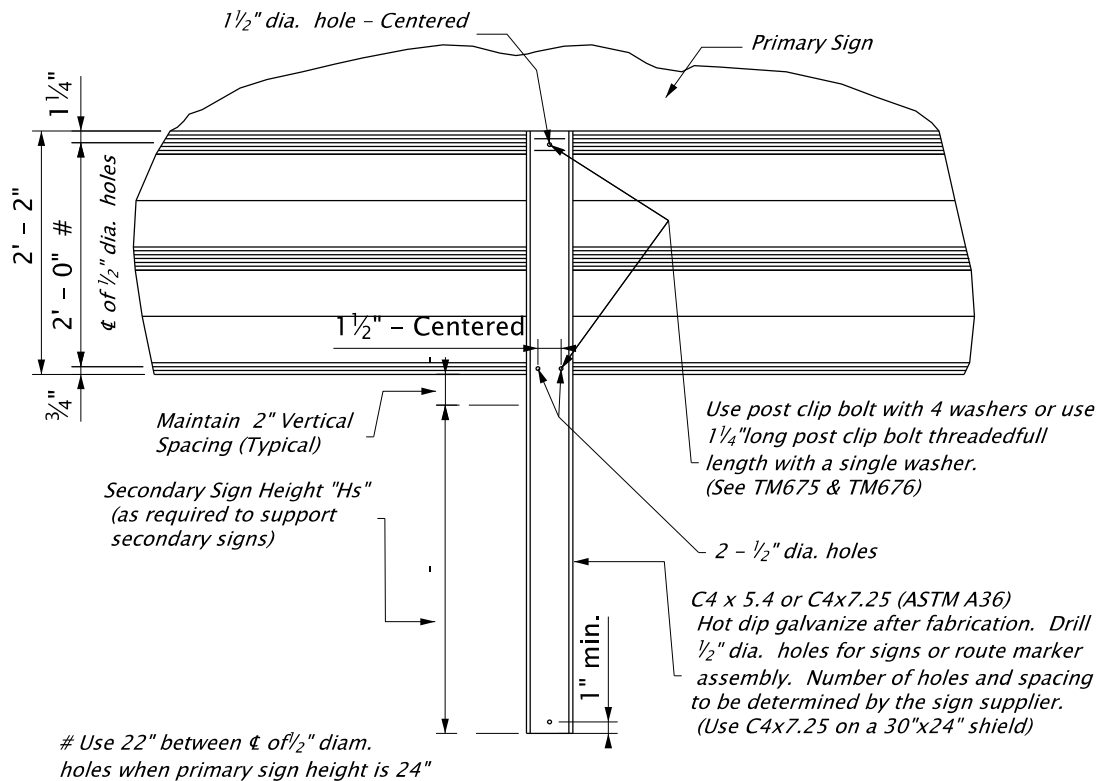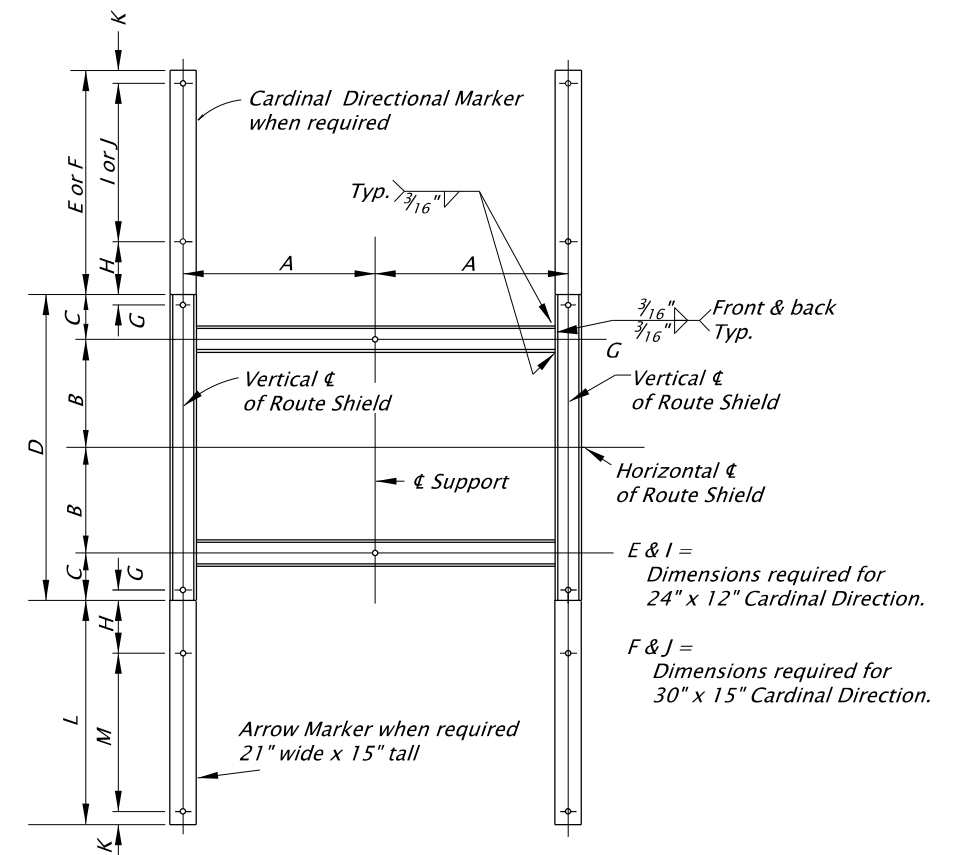

"C" CHANNEL CONNECTION DETAIL
No Scale

| Shield Sizes (in inches) | A | B | C | D | E | F | G | H | I | J | K | L | M |
|-----------------------------|--------|----|-------|----|----|----|-------|---|---|----|---|----|----|
| 2 - 24" x 24" | 13 | 8 | 3 1/2 | 23 | 14 | 17 | 3/4 | 4 | 9 | 12 | 1 | 17 | 12 |
| 1 - 24" x 24" & 1-30" x 24" | 14 1/2 | 8 | 3 1/2 | 23 | 14 | 17 | 3/4 | 4 | 9 | 12 | 1 | 17 | 12 |
| 2 - 30" x 24" | 16 | 8 | 3 1/2 | 23 | 14 | 17 | 3/4 | 4 | 9 | 12 | 1 | 17 | 12 |
| 2 - 36" x 36" | 19 | 12 | 5 1/2 | 35 | 14 | 17 | 1 3/8 | 4 | 9 | 12 | 1 | 17 | 12 |
| 1 - 36" x 36" & 1-45" x 36" | 21 1/4 | 12 | 5 1/2 | 35 | 14 | 17 | 1 3/8 | 4 | 9 | 12 | 1 | 17 | 12 |
| 2 - 45" x 36" | 23 1/2 | 12 | 5 1/2 | 35 | 14 | 17 | 1 3/8 | 4 | 9 | 12 | 1 | 17 | 12 |


Note: Route Marker frames shall be constructed from 2" x 2" x 3/16" ASTM A53 GR B tubing, galvanized after fabrication. Provide 7/16" holes, 3/8" galvanized steel bolts, washers, and lock-nuts for mounting route marker frame to post. For sign attachments see TM676.

ROUTE MARKER FRAME DETAIL
No Scale

Accompanied by dwgs. TM675, TM676


| | |
|--|---|
| CALC. BOOK NO. _____ | BASELINE REPORT DATE <u>09-JAN-2015</u> |
| <p>The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.</p> | NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications |
| | OREGON STANDARD DRAWINGS |
| | SECONDARY SIGN MOUNTING DETAILS |
| | 2018 |
| DATE _____ | REVISION DESCRIPTION _____ |

TM678

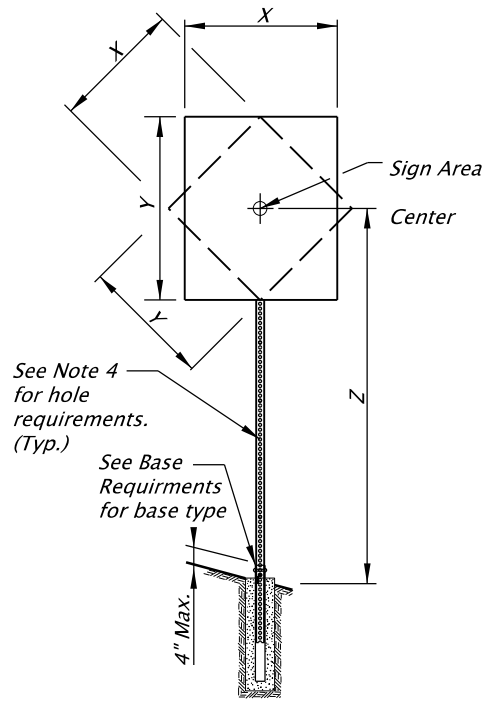


SINGLE POST ELEVATION

No scale

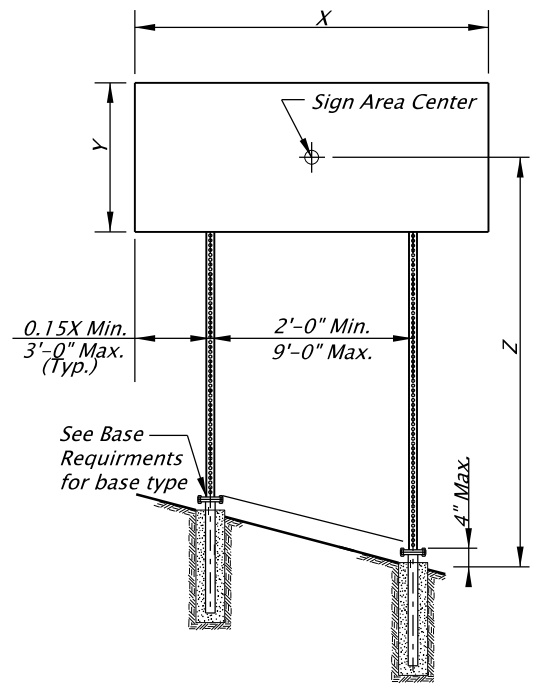

TWO POST ELEVATION

No scale

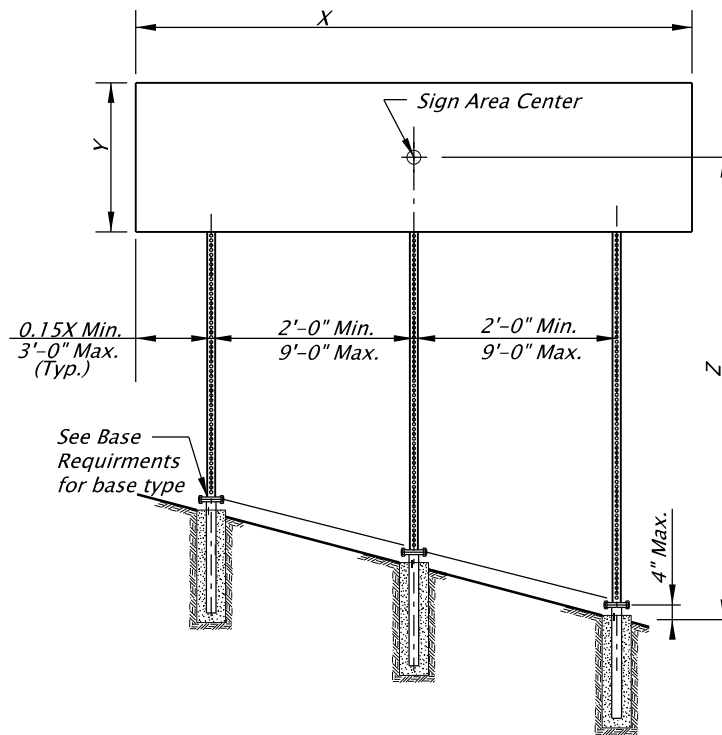

THREE POST ELEVATION

No scale


| Square Tube Size | <i>(X * Y * Z) in ft³ - Maximum</i> | | | | | | | | |
|-------------------------|--|-----|-----|-----------------|-----|-----|-----------------|-----|-----|
| | 3 Second Gust Wind Speed (TM671) | | | | | | | | |
| | 85 MPH | | | 95 MPH | | | 105 or 110 MPH | | |
| | Number of Posts | | | Number of Posts | | | Number of Posts | | |
| 2"-12 ga. | 79 | 158 | 237 | 63 | 126 | 189 | 57 | 114 | 171 |
| 2 1/2"-12 ga. | 136 | 272 | 408 | 109 | 218 | 327 | 98 | 196 | 294 |
| 2 1/2"-10 ga. | 165 | 330 | 495 | 132 | 264 | 396 | 119 | 238 | 357 |
| 2 1/4" & 2 1/2"-12 ga.* | 231 | 462 | 693 | 185 | 370 | 555 | 167 | 334 | 501 |

PERMANENT PERFORATED STEEL SQUARE TUBE TABLE

| Square Tube Size | <i>(X * Y * Z) in ft³ - Maximum</i> | | | | | | | | |
|-------------------------|--|-----|------|-----------------|-----|-----|-----------------|-----|-----|
| | 3 Second Gust Wind Speed (TM671) | | | | | | | | |
| | 85 MPH | | | 95 MPH | | | 105 or 110 MPH | | |
| | Number of Posts | | | Number of Posts | | | Number of Posts | | |
| 2"-12 ga. | 125 | 250 | 375 | 100 | 200 | 300 | 90 | 180 | 270 |
| 2 1/2"-12 ga. | 215 | 430 | 645 | 172 | 344 | 516 | 155 | 310 | 465 |
| 2 1/2"-10 ga. | 261 | 522 | 783 | 209 | 418 | 627 | 189 | 378 | 567 |
| 2 1/4" & 2 1/2"-12 ga.* | 364 | 728 | 1092 | 292 | 584 | 876 | 263 | 526 | 789 |

TEMPORARY PERFORATED STEEL SQUARE TUBE TABLE

* - See 2 1/4" & 2 1/2" - 12 ga. detail.

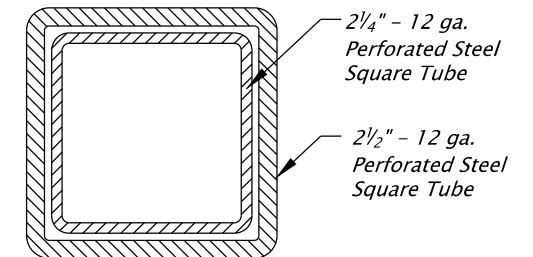

2 1/4" - 12 ga. PSST to extend entire length inside of the 2 1/2" - 12 ga. PSST.

2 1/4" & 2 1/2" - 12 GA. DETAIL

No scale

| Square Tube Size | Number of Posts | | |
|-------------------------|-----------------|--------|------|
| | 1 | 2 | 3 |
| 2"-12 ga. | Anchor | Anchor | N/A |
| 2 1/2"-12 ga. | Anchor | Slip | Slip |
| 2 1/2"-10 ga. | Slip | Slip | Slip |
| 2 1/4" & 2 1/2"-12 ga.* | Slip | Slip | Slip |

1. Anchor - See Drawing TM687 for PSST anchor foundation details.
2. Slip - See Drawing TM688 for PSST slip base foundation details.
3. N/A - Do not use this option.

BASE REQUIREMENTS

GENERAL NOTES:


1. Perforated Steel Square Supports are designed in accordance with the AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires, and Traffic Signals 4th Edition, 2001, 2002, 2003, and 2006 interim revisions.
2. The design basic wind speed (3 second gust) shall be according to the wind map shown on TM671.
3. Material grade for base hardware connection shall be according to the manufacturer's recommendation and based on crash testing.
4. Use 7/16" diameter holes at 1" spacing on each of the 4 sides.
5. Steel post shall have a minimum yield stress of 50 ksi.
6. Steel shall be galvanized according to ASTM A653 with coating designation G90.
7. General design parameters are $K_z = 0.87$, C_d (sign) = 1.20, and $G = 1.14$.
8. Permanent signing uses an $I_r = 0.71$ for a recurrence interval of 10 years.
9. Temporary signing uses an $I_r = 0.45$ for a recurrence interval of 1.5 years.
10. The sign width to sign height or sign height to sign width ratio shall not exceed 5.0.
11. For horizontal and vertical clearances of permanent signs refer to TM200 and of temporary signs refer to TM822.
12. Posts protected by barrier or guardrail do not require slip bases.

Accompanied by dwgs. TM200, TM671, TM687, TM688, TM689, TM822


| | |
|---|---|
| CALC. BOOK NO. <u>5752</u> | BASELINE REPORT DATE <u>10-JUL-2017</u> |
| NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications | |
| OREGON STANDARD DRAWINGS | |
| PERFORATED STEEL SQUARE TUBE (PSST) SIGN SUPPORT INSTALLATION | |
| 2018 | |
| DATE | REVISION DESCRIPTION |
| 07/17 | Changed G140 to G90. |
| | |
| | |

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.


tm688.dgn 10-JUL-2017

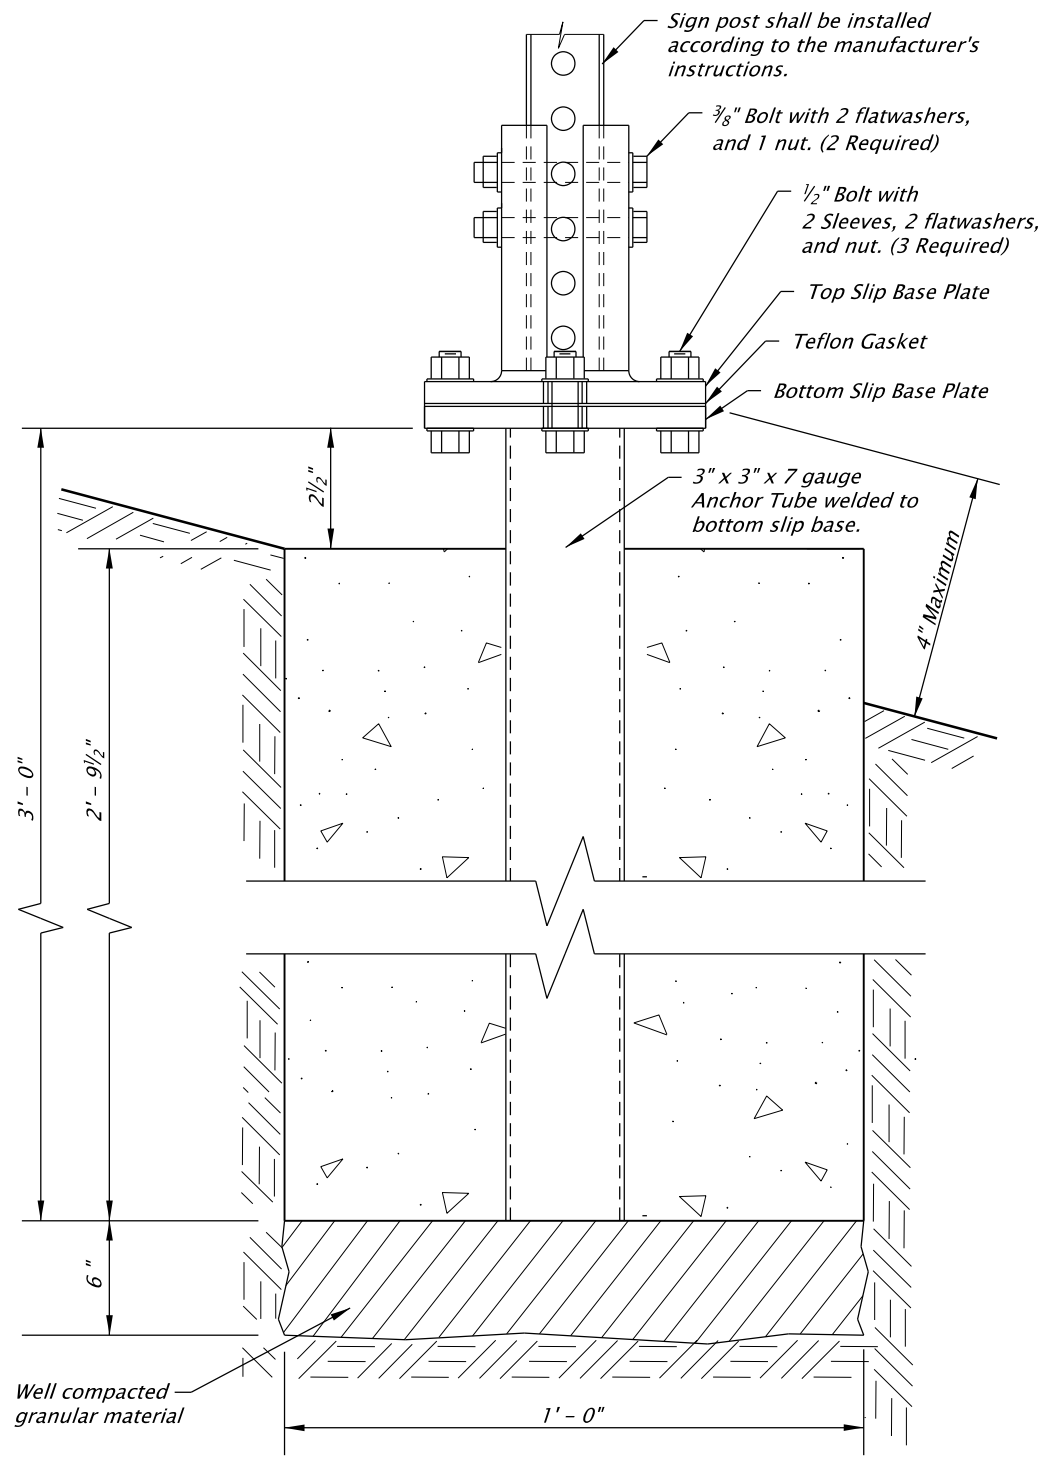

SLIP BASE ELEVATION
No scale

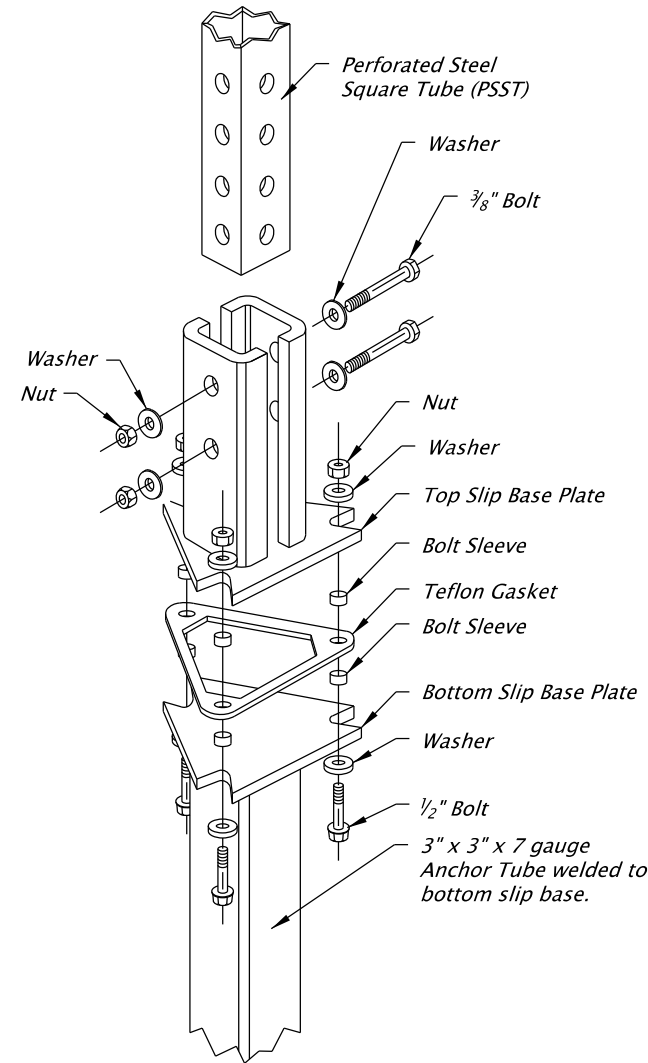

SLIP BASE EXPLODED VIEW
No scale

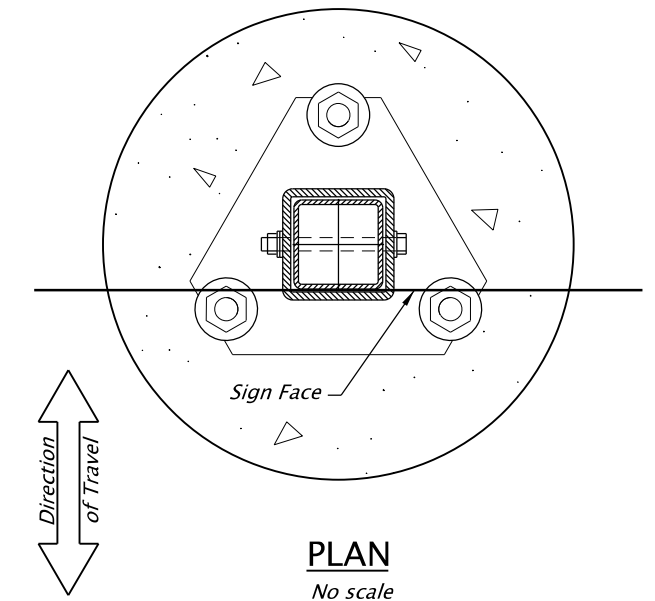

PLAN
No scale

General Notes:

1. Material grade for base hardware connection shall be according to the manufacturer's recommendation and based on crash testing.
2. Slip base steel shall be hot dipped galvanized or approved equal.
3. Footing concrete shall be Commercial Grade Concrete ($f_c = 3000$ psi) per Specification 00440. The CGC mixture may be accepted at the site of placement according to 00440.14.
4. Material grade for base hardware connection shall be according to the manufacturer's recommendation and based on crash testing.
5. All slip bases shall be pre-assembled by the manufacturer and shall be installed according to the manufacturer's instructions.
6. Use slip bases listed on the ODOT Qualified products list or submit crash testing data, installation instructions, and unstamped working drawings according to 00150.35.
7. Slip base details shown are not for a specific manufacturer and are only shown to convey general pieces of a slip base system. Specific slip base material will be according to the manufacturer's documentation.

Accompanied by dwgs. TM681, TM687

| | |
|---|---|
| CALC. BOOK NO. <u>5752</u> | BASILINE REPORT DATE <u>06-JAN-2012</u> |
| NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications | |
| OREGON STANDARD DRAWINGS | |
| PERFORATED STEEL SQUARE TUBE (PSST) SLIP BASE FOUNDATION | |
| 2018 | |
| DATE | REVISION DESCRIPTION |
| | |
| | |
| | |

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

889W1

tm800.dgn 01-JAN-2019

00800

| TAPER TYPES & FORMULAS | |
|---------------------------|-----------------------|
| TAPER | FORMULA |
| Merging (Lane Closure) | "L" |
| Shifting | "L"/2 or 1/2"L" |
| Shoulder Closure | "L"/3 or 1/3"L" |
| Flagging (See Drg. TM850) | 50' - 100' |
| Downstream (Termination) | Varies (See Drawings) |

★ Use Pre-Construction Posted Speed to select the Speed from the Tables below:

| CONCRETE BARRIER FLARE RATE TABLE | |
|-----------------------------------|--------------------|
| ★ SPEED (mph) | MINIMUM FLARE RATE |
| ≤ 30 | 8:1 |
| 35 | 9:1 |
| 40 | 10:1 |
| 45 | 12:1 |
| 50 | 14:1 |
| 55 | 16:1 |
| 60 | 18:1 |
| 65 | 19:1 |
| 70 | 20:1 |

| MINIMUM LENGTHS TABLE | | | | | |
|---------------------------|--|--------|--------|--------|-----------------|
| "L" VALUE FOR TAPERS (ft) | | | | | BUFFER "B" (ft) |
| ★ SPEED (mph) | W = Lane or Shoulder Width being closed or shifted | | | | |
| | W ≤ 10 | W = 12 | W = 14 | W = 16 | |
| 25 | 105 | 125 | 145 | 165 | 75 |
| 30 | 150 | 180 | 210 | 240 | 100 |
| 35 | 205 | 245 | 285 | 325 | 125 |
| 40 | 265 | 320 | 375 | 430 | 150 |
| 45 | 450 | 540 | 630 | 720 | 180 |
| 50 | 500 | 600 | 700 | 800 | 210 |
| 55 | 550 | 660 | 770 | 880 | 250 |
| 60 | 600 | 720 | 840 | 960 | 285 |
| 65 | 650 | 780 | 910 | 1000 | 325 |
| 70 | 700 | 840 | 980 | 1000 | 365 |
| FREEWAYS | | | | | |
| 55 | 1000 | 1000 | 1000 | 1000 | 250 |
| 60 | 1000 | 1000 | 1000 | 1000 | 285 |
| 65 | 1000 | 1000 | 1000 | 1000 | 325 |
| 70 | 1000 | 1000 | 1000 | 1000 | 365 |


NOTES:
 • For Lane closures where W < 10', use "L" value for W = 10'.
 • For Shoulder closures where W < 10', use "L" value for W = 10' or calculate "L" using formula, for Speeds ≥ 45: L = WS, Speeds < 45: L = S²W/60, S = Speed, W=Width

| TRAFFIC CONTROL DEVICES (TCD) SPACING TABLE | | | | |
|---|-------------------|------|------|---------------------------------------|
| ★ SPEED (mph) | Sign Spacing (ft) | | | Max. Channelizing Device Spacing (ft) |
| | A | B | C | |
| 20 - 30 | 100 | 100 | 100 | 20 |
| 35 - 40 | 350 | 350 | 350 | 20 |
| 45 - 55 | 500 | 500 | 500 | 40 |
| 60 - 70 | 700 | 700 | 700 | 40 |
| Freeway | 1000 | 1500 | 2640 | 40 |

NOTES:
 • Place traffic control devices on 10 ft. spacing for intersection and access radii.
 • When necessary, sign spacing may be adjusted to fit site conditions.
 Limit spacing adjustments to 30% of the "A" dimension for all speeds.

NOTES:


- When paved shoulders adjacent to excavations are less than four feet wide protect longitudinal abrupt edge as shown.
- Use aggregate wedge when abrupt edge is 2 inches or greater.

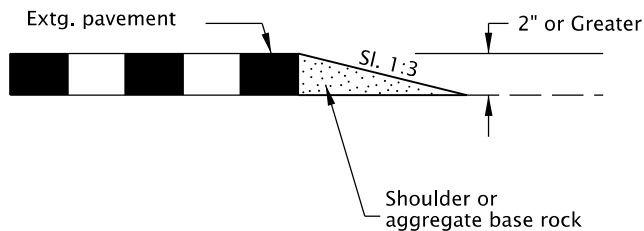

EXCAVATION ABRUPT EDGE

NOTES:


- Install PCMS beyond the outside shoulder, when possible.
- Use the appropriate type of barricade panels for PCMS location. Right shoulder, use Type B(III)R. Left shoulder, use Type B(III)L.
- Use six drums in shoulder taper on 20' spacing. The drums and barricade may be omitted when PCMS is placed behind a roadside barrier.
- Detail as shown is used for trailered and non-crashworthy components of:
 - Portable Traffic Signals
 - Smart Work Zone Systems

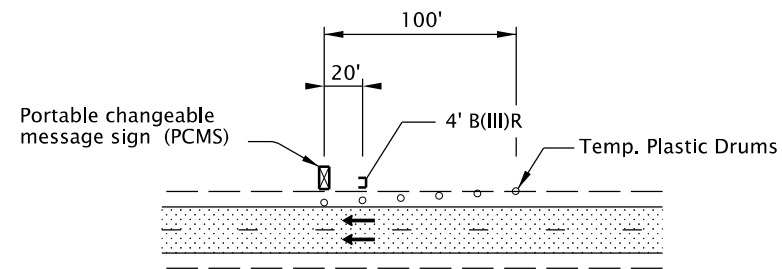

PORTABLE CHANGEABLE MESSAGE SIGN (PCMS) INSTALLATION

NOTES:


- Install Flagger Station Lighting beyond the outside shoulder, where practical.
- Use six tubular markers in shoulder taper on 10' spacing.
- Place cart / generator / power supply off of the shoulder, as far as practical.

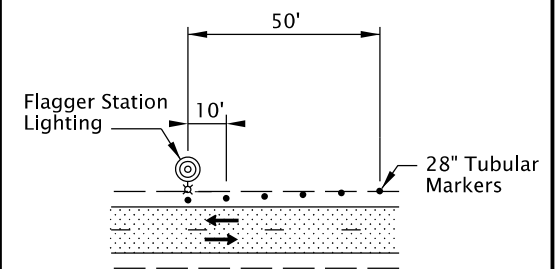

FLAGGER STATION LIGHTING DELINEATION

NOTES:


- Abrupt edges may be created by paving, operations, excavations or other roadway work. Use abrupt edge signing for longitudinal abrupt edges of 1 inch or greater.
- If the excavation is located on left side of traffic, replace the 8' B(III)R barricades with 8' B(III)L barricades and replace the "RIGHT" (CW21-8C) riders with "LEFT" (CW21-8A) riders.
- Continue signing and other traffic control devices throughout excavation area at spacings shown.
- If roll-up signs are used, attach the correct (CW21-9) plaques to the sign face using hook and loop fasteners. Place roll-up signs in advance of barricades.

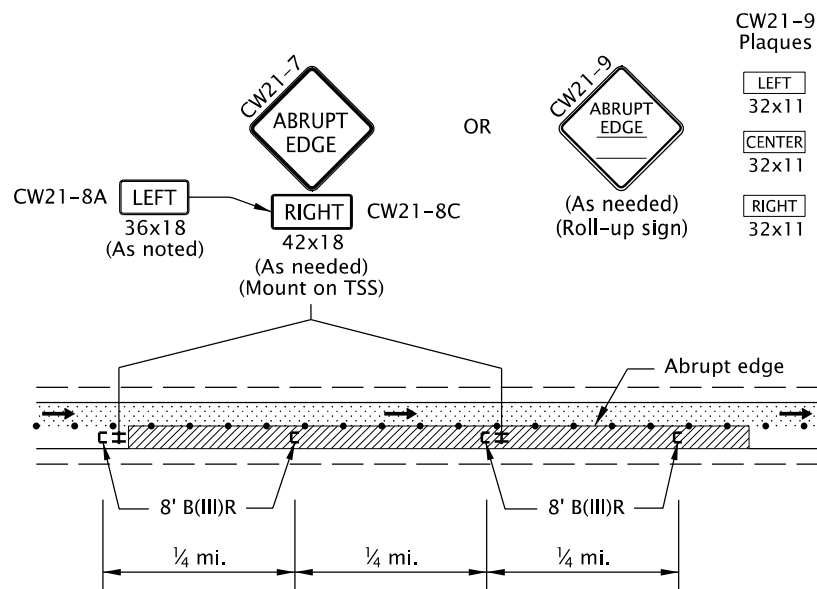

TYPICAL ABRUPT EDGE DELINEATION

GENERAL NOTES FOR ALL TCP DRAWINGS:

- Signs and other Traffic Control Devices (TCD) shown are the minimum required.
- Place a barricade approx. 20' ahead of all sequential arrow boards.
- Arrows shown in roadway are directional arrows to indicate traffic movements.
- All signs are 48" x 48" unless otherwise shown. Use fluorescent orange sheeting for the background of all temporary warning signs.
- All diamond shaped warning signs mounted on barrier sign supports shall be 36" by 36". All other signs mounted on barrier sign supports shall not exceed 12 sq. ft. in total sign area.
- Low speed highways have a pre-construction posted speed of 40 mph or less. High speed highways have a pre-construction posted speed of > 40 mph.
- Do not locate sign supports in locations designated for bicycle or pedestrian traffic.
- Combine drawing details to complete temporary traffic control for each work activity.
- To be accompanied by Drg. Nos. TM820 & TM821.

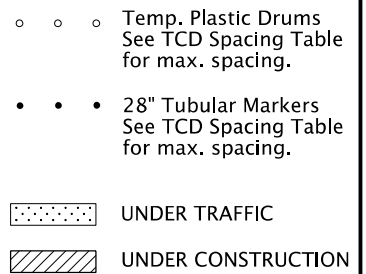

CALC. BOOK NO. ___ _ _ _ TM09-01 ___ _ _

BASELINE REPORT DATE ___ _ _ _ 01-JAN-2019 ___ _ _

NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications


OREGON STANDARD DRAWINGS
TABLES, ABRUPT EDGE AND PCMS DETAILS

2018

| DATE | REVISION | DESCRIPTION |
|------|----------|-------------|
| | | |
| | | |
| | | |

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.


tm810.dgn 01-JAN-2019

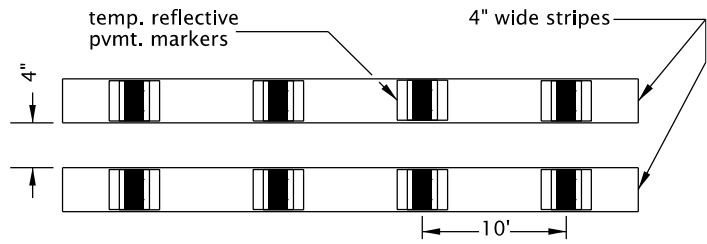

LAYOUT "A"
(Supplemented double solid lines)

TYPICAL APPLICATIONS:


- To prohibit lane changes or passing (include appropriate regulatory signs).
- Freeway or multilane shifts and crossovers.
- For projects in place through winter months.
- Two-lane, two-way centerlines.

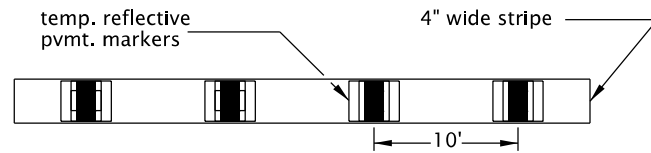

LAYOUT "B"
(Supplemented solid line)

TYPICAL APPLICATIONS:


- Alignment shifts or crossovers.
- To discourage lane changes in multilane sections.
- For projects in place through winter months.

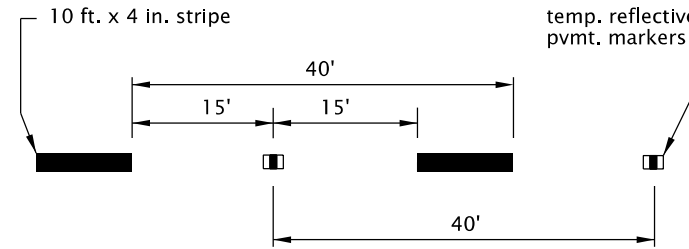

LAYOUT "C"
(Supplemented broken lines)

TYPICAL APPLICATIONS:


- Freeway and multilane broken lines.
- High ADT 2 lane roads (greater than 10,000).
- For projects in place through winter months.

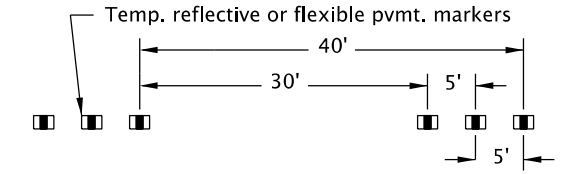

LAYOUT "D"
(Simulated broken lines)

TYPICAL APPLICATIONS:


- During staging on finished/existing surfaces.
- HMAC intermediate surfaces.
- Emulsified asphalt surface treatments (chip seals) where permanent pavement markings cannot be placed within two weeks.



LAYOUT "E"
(Simulated solid lines)

TYPICAL APPLICATIONS:


- Alignment shifts or crossovers.
- To discourage lane changes in multilane sections.
- Edge lines for short durations, less than 14 days.

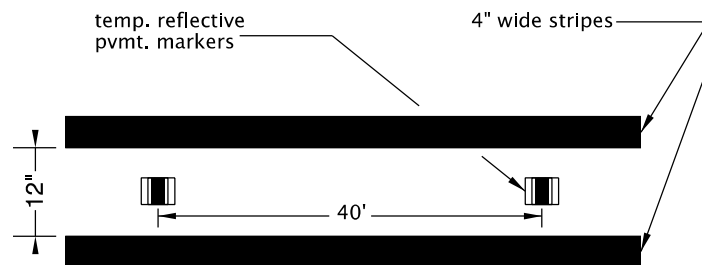

LAYOUT "F"
(Supplemented wide double solid lines)

TYPICAL APPLICATIONS:

- To prohibit lane changes or passing (include appropriate regulatory signs).
- 2 lane, 2 way centerlines.
- 2 lane, 1 way alignments on freeways or multi-lane highways.

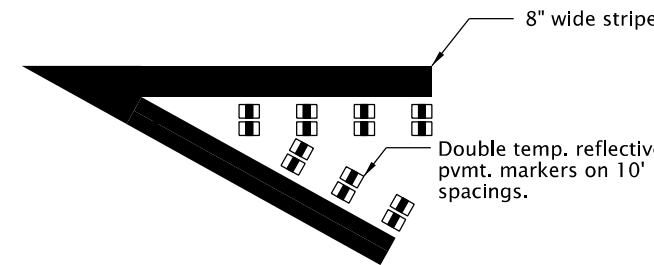

LAYOUT "G"
(Supplemented solid 8" line)

TYPICAL APPLICATIONS:

- Gore areas
- Alignment splits (bifurcations)

GENERAL NOTES FOR ALL DETAILS:

- When using Supplemented or Simulated lines:
 1. Yellow Bi-Directional Pavement Markers are required for Two-Way Traffic.
 2. White Mono-Directional Pavement Markers are required for one-way traffic or edge lines.
- Supplemented lines are painted lines enhanced with Reflective Pavement Markers.
- Simulated lines are Reflective Pavement Markers placed in a pattern to substitute for a painted line.
- Pavement marking colors shall conform to the MUTCD.

CALC. BOOK NO. _____ N/A _____

BASELINE REPORT DATE _____ 01-JAN-2019 _____

NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications




OREGON STANDARD DRAWINGS
TEMPORARY PAVEMENT MARKINGS

2018

| DATE | REVISION | DESCRIPTION |
|------|----------|-------------|
| | | |
| | | |
| | | |

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

TM810

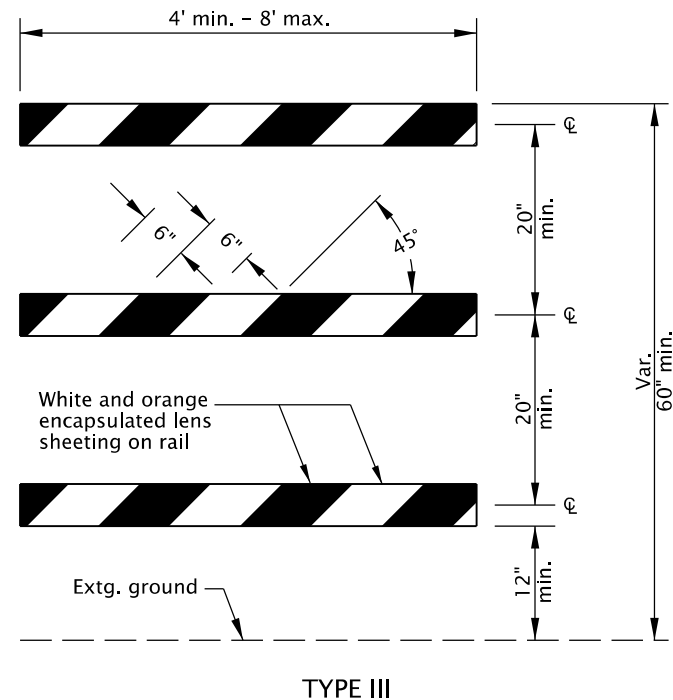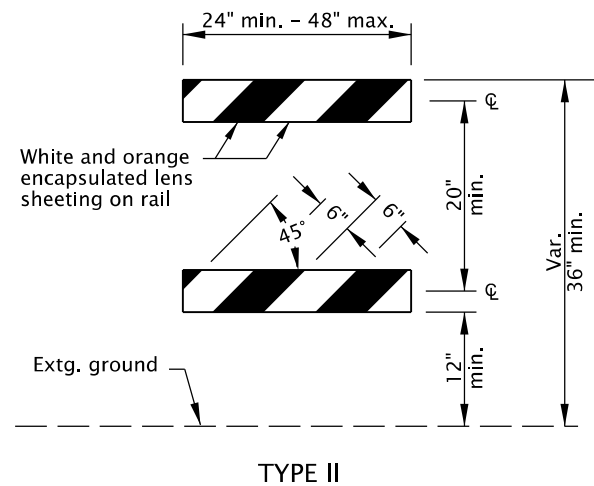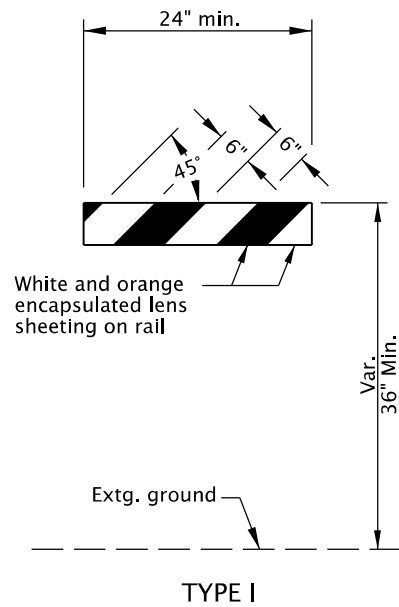



BARRICADE RAIL LAYOUT

GENERAL NOTES FOR ALL DETAILS:

- Sandbags (approximately 25 lb sack filled with sand) may be placed on lower frame to provide additional ballast.
- Ballast shall not extend above bottom rail or be suspended from barricade.
- For rails less than 36" long, 4" wide stripes shall be used.
- Rails must be 8" min. to 12" max. in height.
- Use barricades from ODOT Qualified Products List (QPL).
- Use 4' Type III barricades where horizontal space is limited.
- Do not block bike lanes or shoulders unless the facility is properly closed and signed.
- Do not place barricades in sidewalks unless sidewalk is closed and a temporary pedestrian accessible route (TPAR) is signed according to the TCP. See Drg. No. TM844.

NOTES:

- Markings for barricade rails shall slope downward at an angle of 45° in the direction traffic is to pass.
- Where a barricade extends entirely across a roadway, it is desirable that the stripes slope downward in the direction toward which traffic must turn in detouring.
- Where both right and left turns are provided for, slope the chevron striping downward in both directions from the center of the barricade.
- For full roadway closures, the C or LR barricade may be used. Extend barricades completely across roadway unless access is required for local road users.

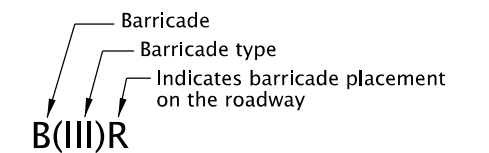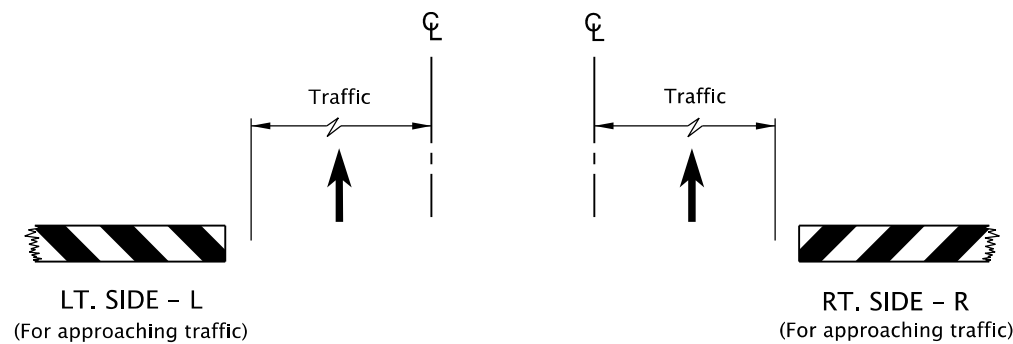

BARRICADE NOTATION


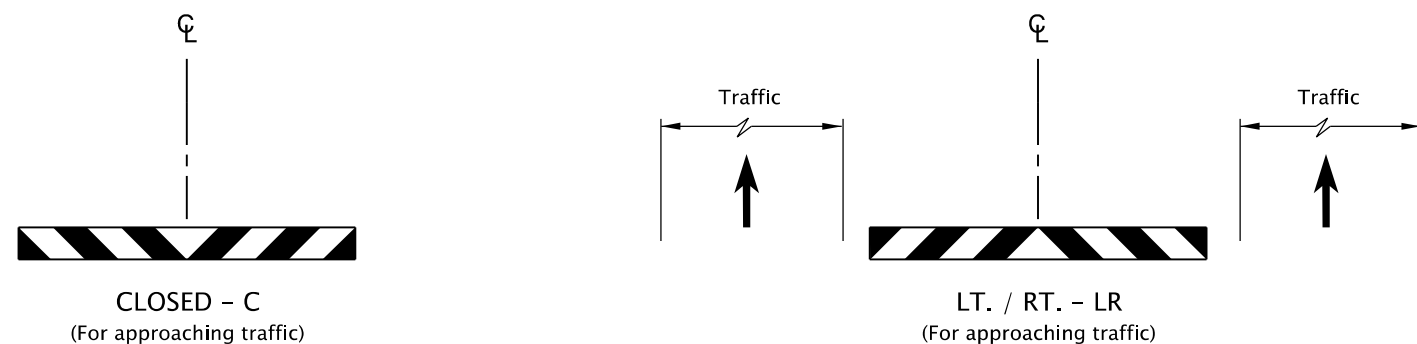


DIAGRAM FOR BARRICADE PLACEMENT AND SLOPE MARKING

| | | | |
|---|---------------|--|--|
| CALC. BOOK NO. _____ N/A _____ | | BASELINE REPORT DATE _____ 01-JAN-2019 _____ | |
| NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications | | | |
| OREGON STANDARD DRAWINGS | | | |
| TEMPORARY BARRICADES | | | |
| 2018 | | | |
| DATE | REVISION | DESCRIPTION | |
| 01-2019 | REVISED NOTES | | |
| | | | |
| | | | |


The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

tm821.dgn 01-JAN-2020

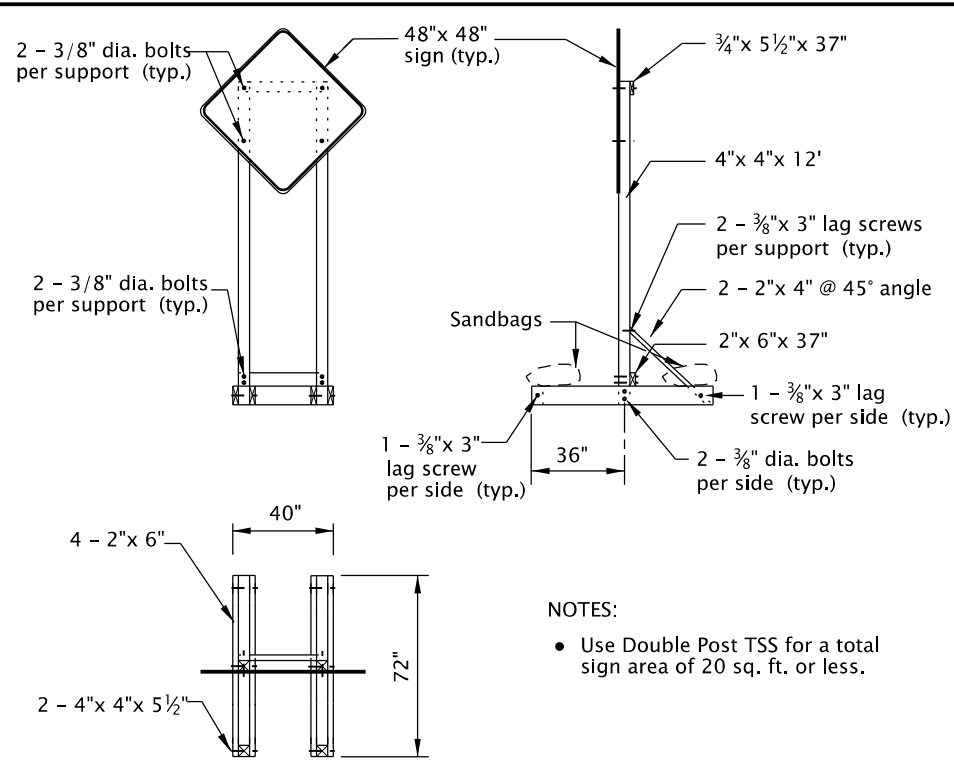


**DOUBLE POST
TEMPORARY SIGN SUPPORT (TSS)**

- NOTES:
- Use Double Post TSS for a total sign area of 20 sq. ft. or less.

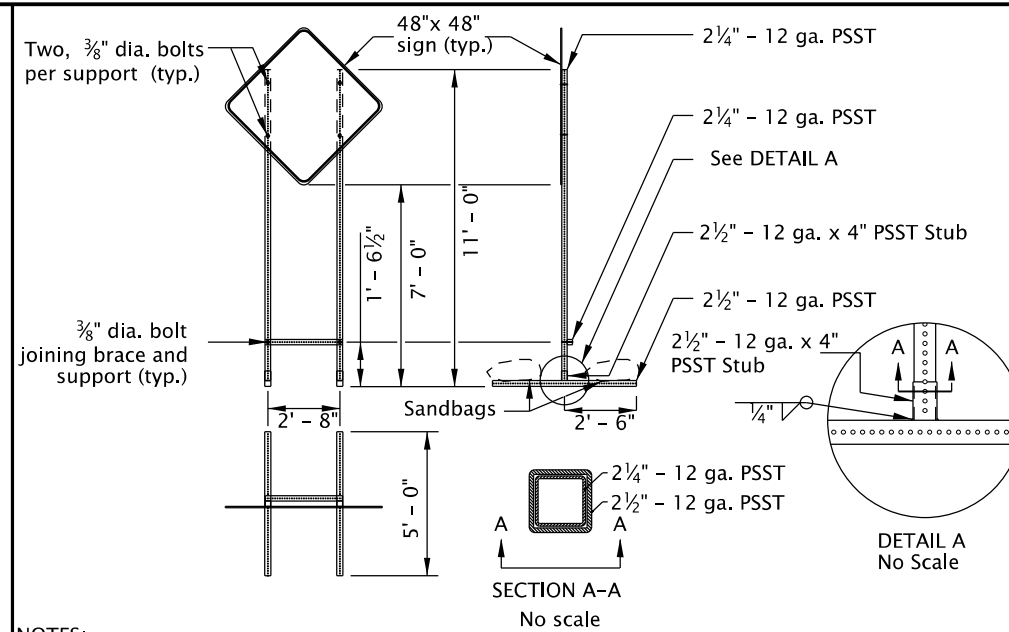


**PERFORATED STEEL SQUARE TUBE (PSST)
TEMPORARY SIGN SUPPORT (TSS)**

- NOTES:
- Use PSST TSS's for a total sign area of 16 sq. ft. or less.
 - All members shall have a minimum yield stress of 50 ksi.
 - Galvanize steel according to ASTM A653 with coating designation G90. Remove Galvanizing from steel before welding. Repair Galvanizing according to ASTM A780.
 - Use A325 Bolts or equivalent.
 - 2 1/4 inch - 12 ga. PSST to extend entire length inside of the 2 1/2 inch - 12 ga. x 4 inch PSST Stub.
 - Do not use bolt to secure 2 1/4 inch PSST inside of the 2 1/2 inch - 12 ga. x 4 inch PSST Stub.
 - Weld steel according to AWS D.1.1.

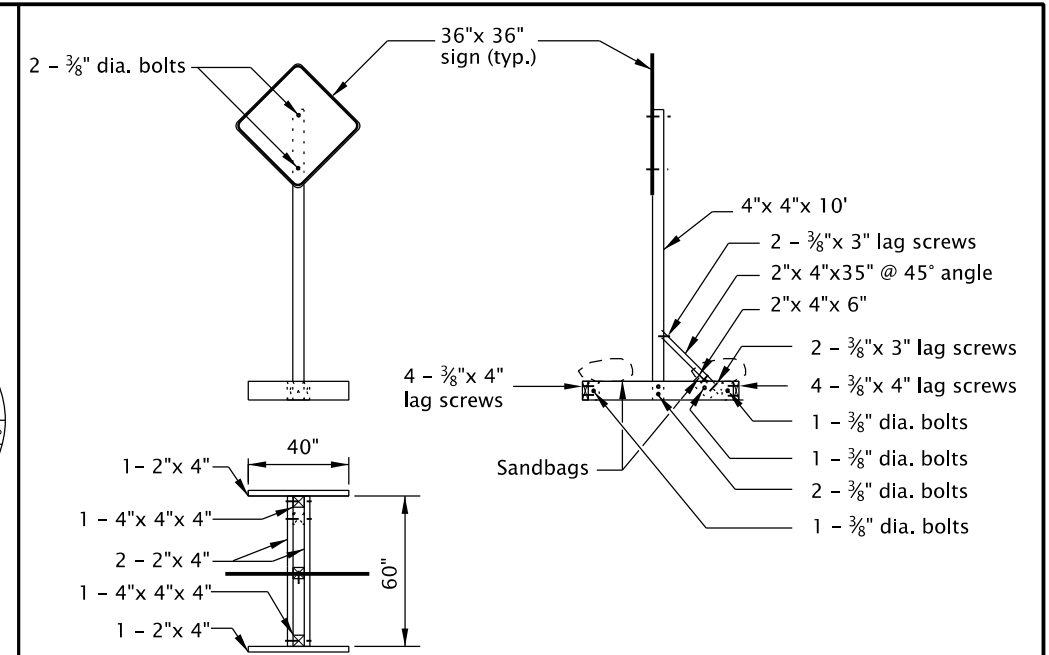


**SINGLE POST
TEMPORARY SIGN SUPPORT (TSS)**


- NOTES:
- Use Single Post TSS for a total sign area of 12 sq. ft. or less.
 - Use Single Post TSS for mounting "Business Access" (CG20-11) signs. Do not mount signs on Type II or III Barricades.

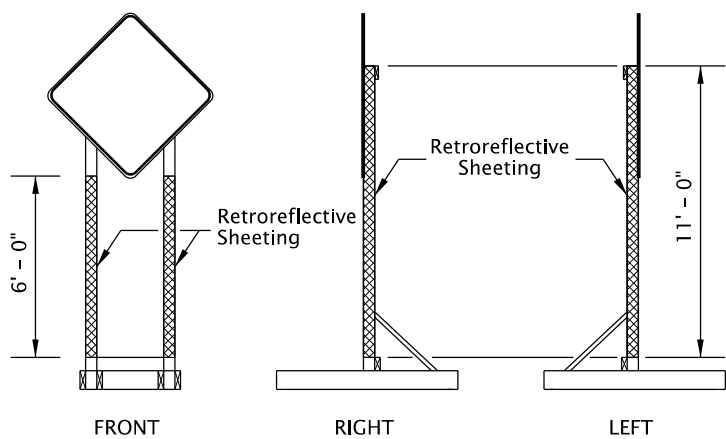

**DOUBLE POST
TEMPORARY SIGN SUPPORT (TSS)**

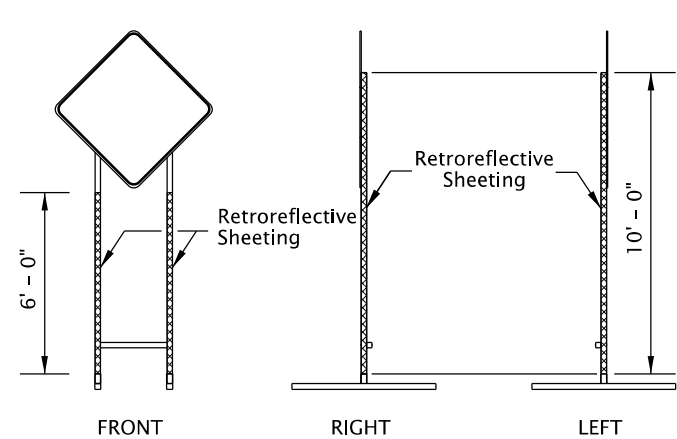

**PERFORATED STEEL SQUARE TUBE (PSST)
TEMPORARY SIGN SUPPORT (TSS)**

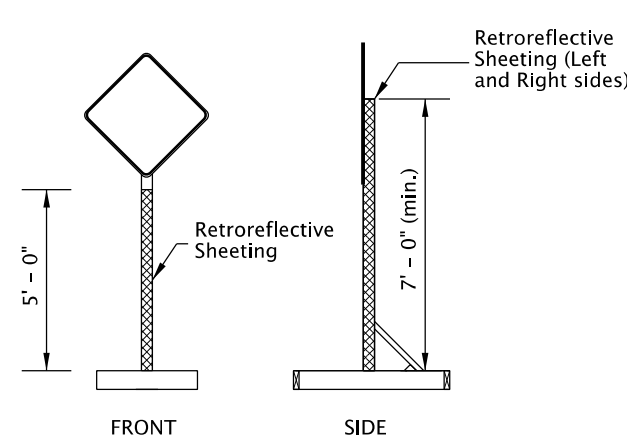

**SINGLE POST
TEMPORARY SIGN SUPPORT (TSS)**

Retroreflective
Sheeting (Left
and Right sides)

TEMPORARY SIGN SUPPORT GENERAL NOTES:

- DO NOT TIP OVER TSS AT ANY TIME.
- Do not locate TSS's in locations that block pedestrian/bicycle traffic.
- For wooden TSS's, use either Douglas Fir or Hem Fir, which is surfaced four sides (S4S) and free of heart center (FOHC).
- See "Temporary Sign Placement" detail on TM822 for sign installation heights.
- Do not place or stack ballast more than 24" above the ground.
- When sign is inconsistent with current work zone conditions, cover sign; or turn sign 90 degrees away from approaching traffic. Remove TSS from roadway when signing is not needed for more than 3 days.
- Place a minimum of 50 lbs of sandbags on each of the four TSS supports legs. (25 lb. max per bag) (min. 100 lbs per side of each TSS).
- See Drg. No. TM204 for flag board mounting detail.

NOTES:

- Apply fluorescent orange, ANSI Type VIII or IX retroreflective sheeting to TSS posts, as shown, for all temporary signs, except "STOP" and "DO NOT ENTER". For "STOP" and "DO NOT ENTER" signs, used red ANSI Type III or IV retroreflective sheeting on the TSS posts.
- Apply sign post retroreflectivity to each TSS post facing front; and to the left and right sides of the TSS, as shown. Use 3" wide sheeting for wood post TSS's. Use 2" wide sheeting for PSST TSS's.
- Sheeting may be applied directly to post material; or applied to a rigid, lightweight substrate, then securely attached to the posts.

SIGN POST REFLECTIVE SHEETING PLACEMENT

CALC. BOOK NO. _____ N/A _____

BASELINE REPORT DATE _____ 01-JAN-2020 _____

NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications

**OREGON STANDARD DRAWINGS
TEMPORARY SIGN SUPPORTS**

2018


| DATE | REVISION | DESCRIPTION |
|---------|----------|-------------|
| 01-2019 | REVIS | NOTES |
| 01-2020 | REVIS | NOTES |
| | | |
| | | |

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.


TM821

NOTES:


- Do not block bicycle lanes, sidewalks, or TPAR's with sign supports. Maintain minimum widths for these facilities according to TCP Design Manual, MUTCD, ADA, or as directed.
- To be accompanied by Drg. Nos. TM670, TM671, TM687, TM688 & TM689.

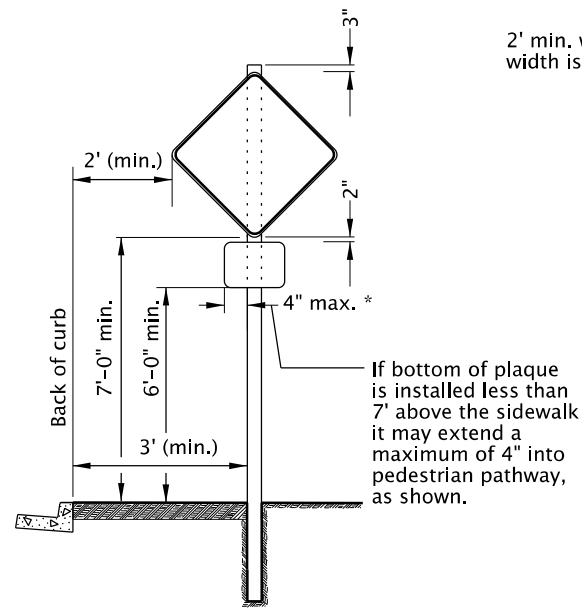

URBAN AREAS WITH CURB/SIDEWALK

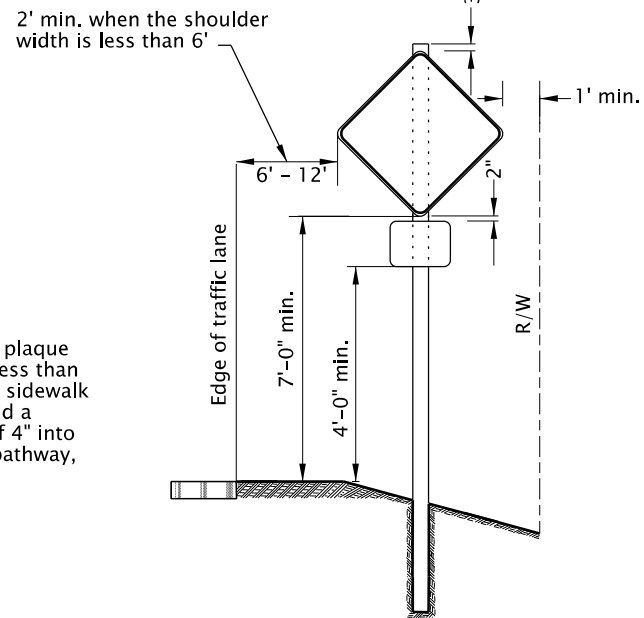


RURAL AREAS

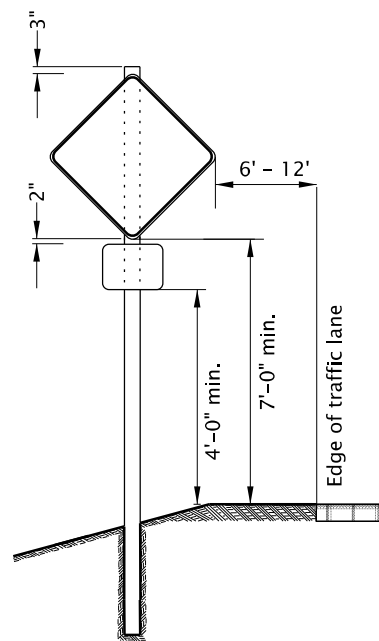


DIVIDED HIGHWAY/FREEWAY MEDIANS
NO CURB/SIDEWALK

Where temporary signs are located adjacent to or intrude into a paved shoulder or other surface used by bicycle traffic, install secondary sign (plaque) so bottom of sign is a minimum of 7'-0" above pavement surface, as shown.

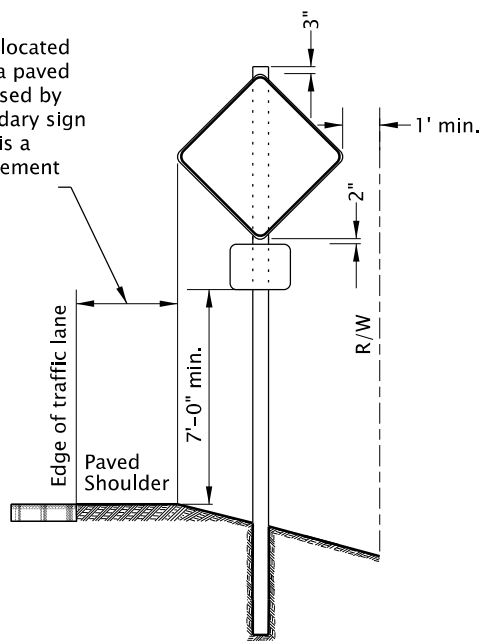

RURAL OR URBAN AREAS - CURB OR NO CURB
BICYCLES ON SHOULDER

TEMPORARY SIGN PLACEMENT

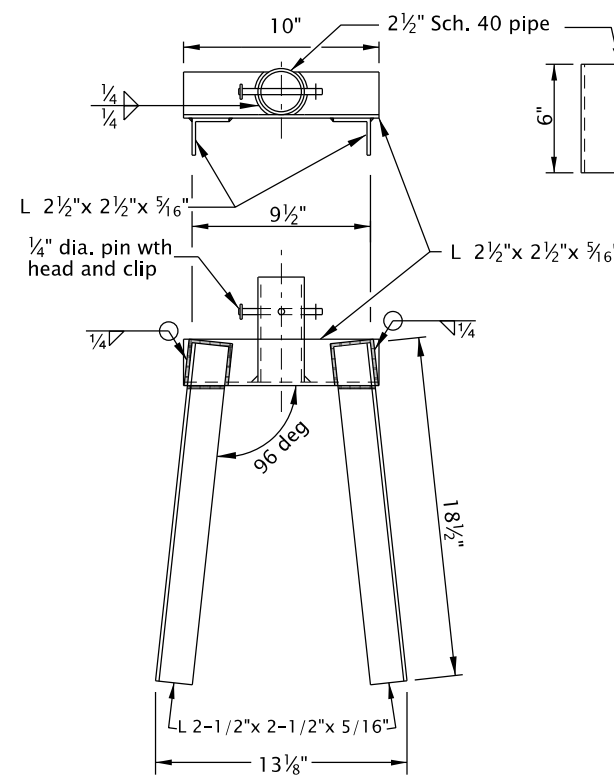

NOTES:


- Drill additional holes so sign can be rotated 90 degrees and pinned when not in use.
- All structural steel shall conform to ASTM A36.
- Support fits both 32" and 42" tall "F" barrier.
- Use for supporting a maximum 12 sq. ft. of total sign area.
- Place support at connection between two concrete barrier sections.
- Weld steel according to American Welding Society (AWS) D.1.1.
- Do not use clipped signs.
- Follow manufacturer recommendation when installing signs on barrier other than concrete.

CONCRETE BARRIER SIGN SUPPORT


| <p>CALC. BOOK NO. _____ N/A _____</p> <p><i>The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.</i></p> | <p>BASELINE REPORT DATE _____ 01-JAN-2020 _____</p> <p>NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications</p> <p>OREGON STANDARD DRAWINGS</p> <p>TEMPORARY SIGN SUPPORTS</p> <p>2018</p> <table border="1"> <thead> <tr> <th>DATE</th> <th>REVISION</th> <th>DESCRIPTION</th> </tr> </thead> <tbody> <tr> <td>01-2018</td> <td>REVISED DRAWING</td> <td></td> </tr> <tr> <td>01-2019</td> <td>REVISED NOTES</td> <td></td> </tr> <tr> <td>01-2020</td> <td>REVISED NOTES</td> <td></td> </tr> </tbody> </table> | DATE | REVISION | DESCRIPTION | 01-2018 | REVISED DRAWING | | 01-2019 | REVISED NOTES | | 01-2020 | REVISED NOTES | |
|---|--|-------------|----------|-------------|---------|-----------------|--|---------|---------------|--|---------|---------------|--|
| DATE | REVISION | DESCRIPTION | | | | | | | | | | | |
| 01-2018 | REVISED DRAWING | | | | | | | | | | | | |
| 01-2019 | REVISED NOTES | | | | | | | | | | | | |
| 01-2020 | REVISED NOTES | | | | | | | | | | | | |

NOTES:
 If closure point is less than 1500 ft. from nearest intersection, use a "ROAD CLOSED TO THRU TRAFFIC" (R11-4) sign in place of the "ROAD CLOSED XX MILES AHEAD" sign.

* If the roadway width (between edges of pavement) at the closure point exceeds 24 feet, place one additional 8' B(III)C barricade for every 12 feet of additional roadway width.

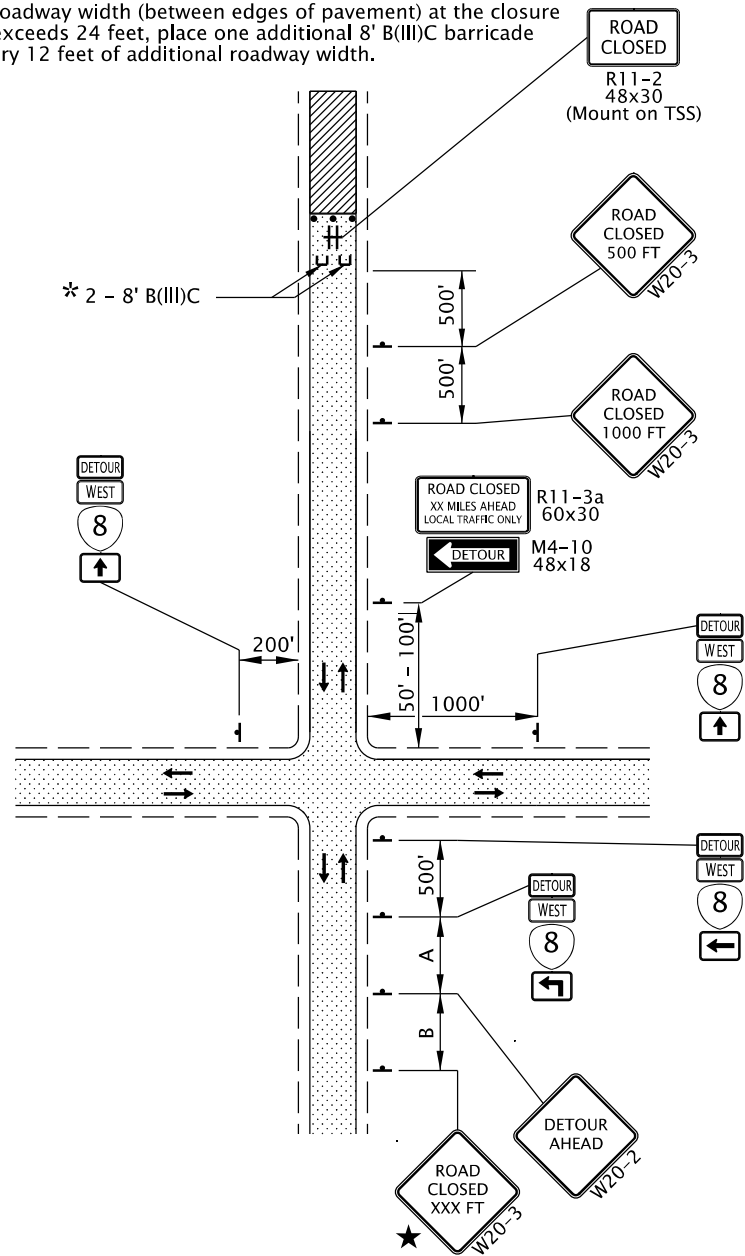


TYPICAL ROAD CLOSURE WITH DETOUR

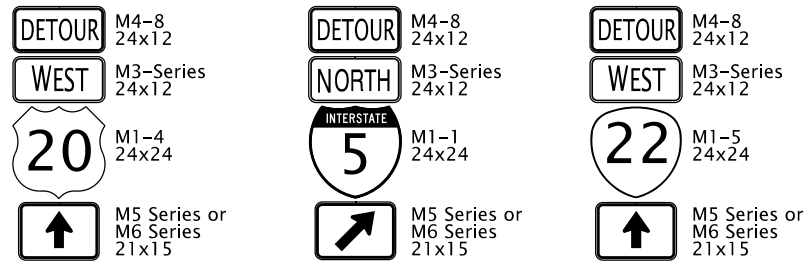

TYPICAL TRAILBLAZER ASSEMBLY

NOTE:
 When detour routes overlap, each Route Shield will include a separate cardinal direction, detour, and directional arrow auxiliary sign assembly.

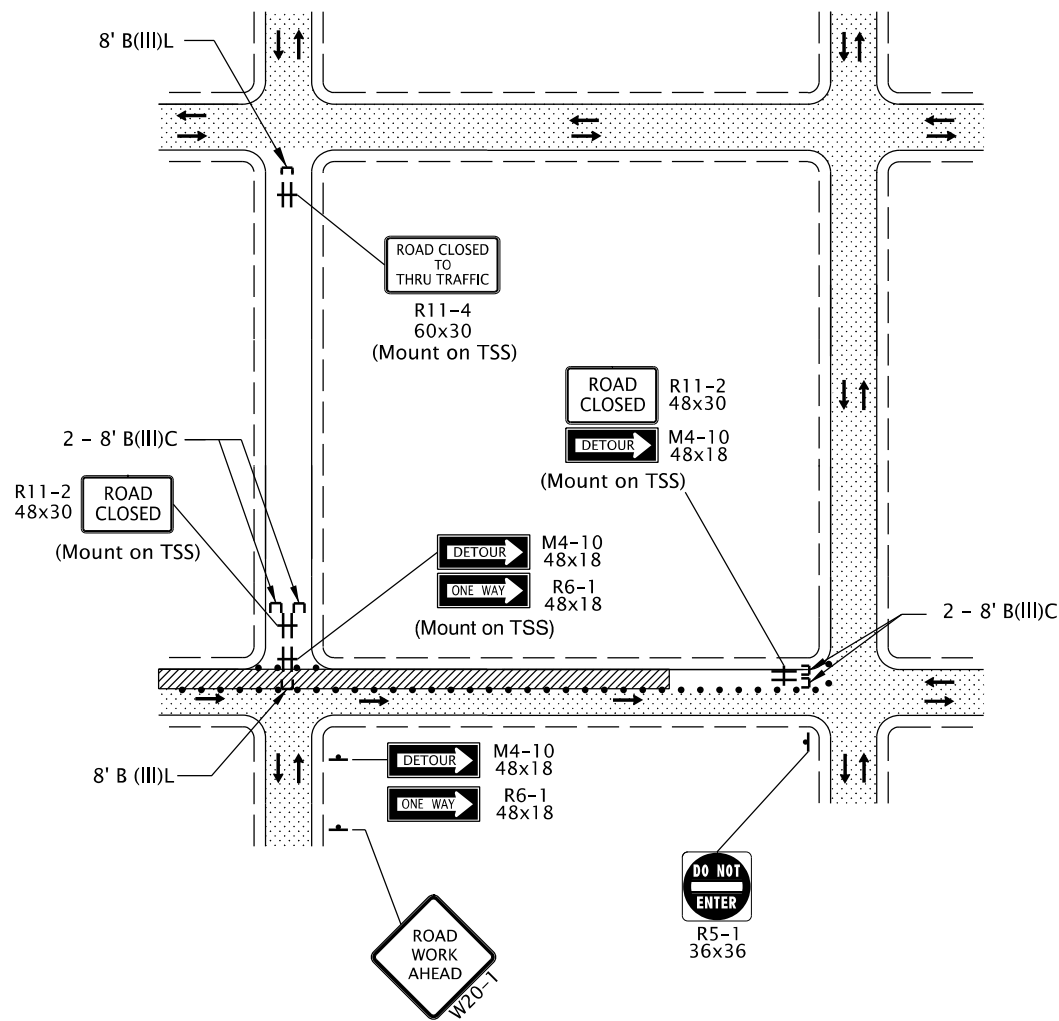

TYPICAL PARTIAL ROAD CLOSURE


GENERAL NOTES FOR ALL DETAILS:

★ A "Street Name" rider may be used to enhance Road Closure signing; or provide a project specific design; or, as shown in the traffic control plan.




##x18 Rider
 Rider width to be determined by width of street name.

OR



48 x 60 (nom.)
 Project Specific Design

OR



48 x 60 (nom.)
 Project Specific Design

• Use a minimum of two Type III barricades for a road closure. For roads $\geq 36'$ wide between curbs or edge of pavement, use a minimum of three Type III barricades for the closure point.

• For full road closures, the C or LR barricade may be used.

• Place additional signing as directed.


• To determine sign spacing A, B, & C, use the "TRAFFIC CONTROL DEVICES (TCD) SPACING TABLE" on Drg. TM800.

• To be accompanied by Drg. Nos. TM820 & TM821.

••••• 28" Tubular Markers
 See TCD Spacing Table on TM800 for max. spacing.

••••• UNDER TRAFFIC

▨ UNDER CONSTRUCTION

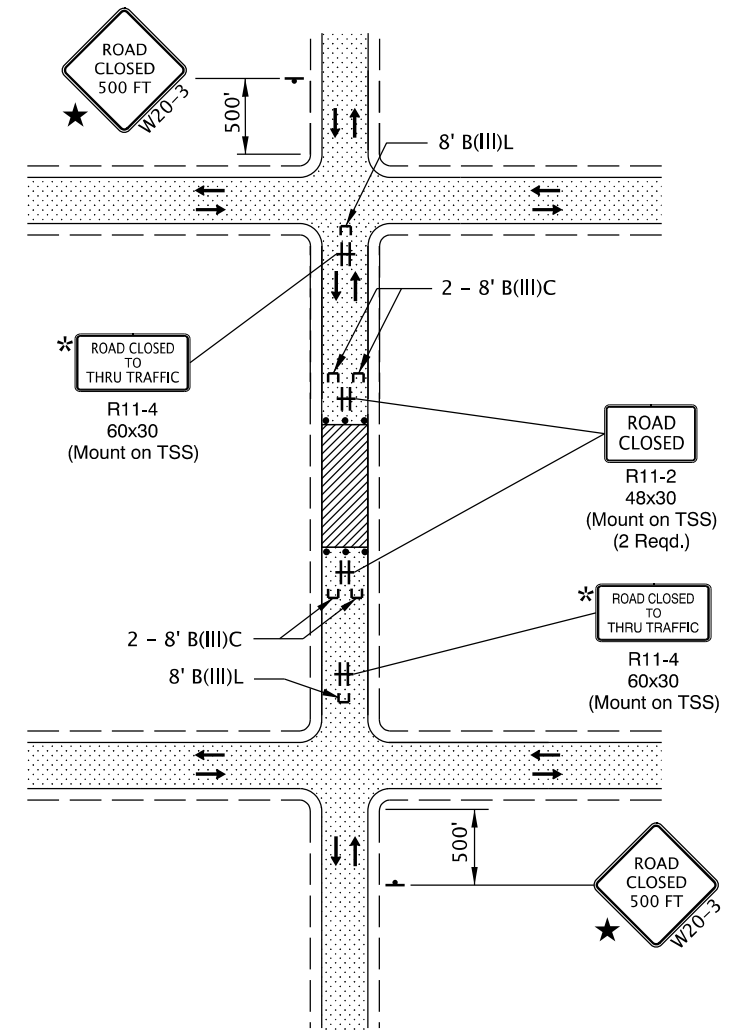

NOTE:
 * If accesses exist between intersection and point of closure, install "ROAD CLOSED TO THRU TRAFFIC" sign as shown.

TYPICAL ROAD CLOSURE

CALC. BOOK NO. _N/A_

BASELINE REPORT DATE _01-JAN-2019_

NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications


OREGON STANDARD DRAWINGS

CLOSURE DETAILS


2018

| DATE | REVISION DESCRIPTION |
|---------|----------------------|
| 01-2018 | REVISED DRAWING |
| | |
| | |


The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

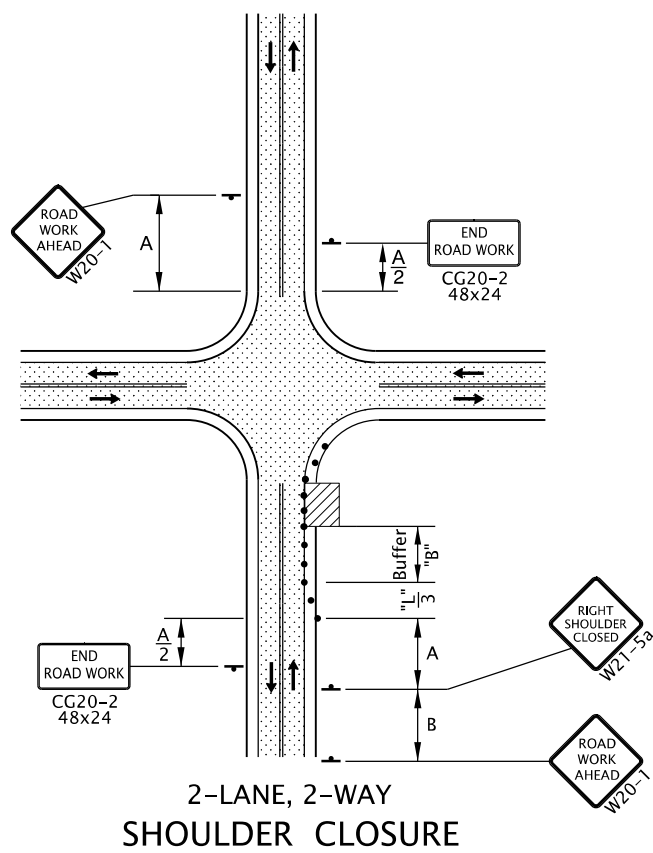


2-LANE, 2-WAY SHOULDER CLOSURE

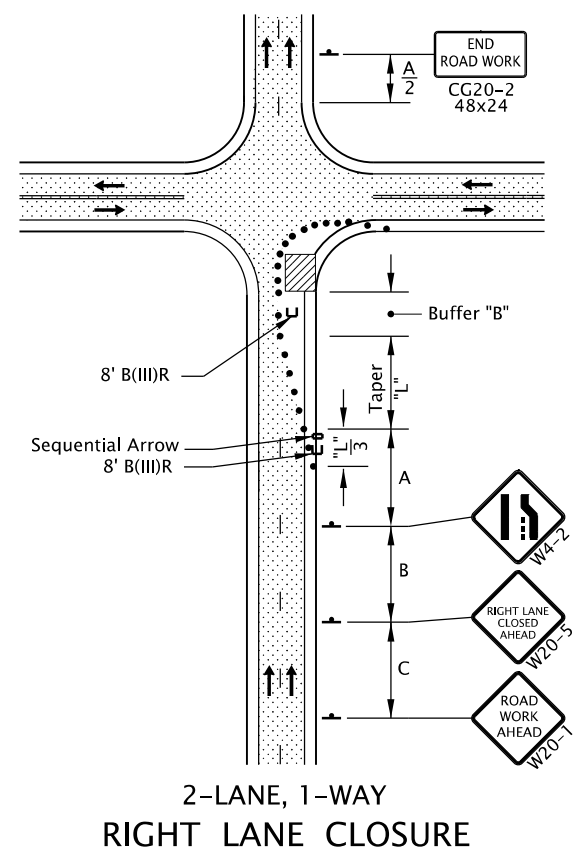


2-LANE, 1-WAY RIGHT LANE CLOSURE

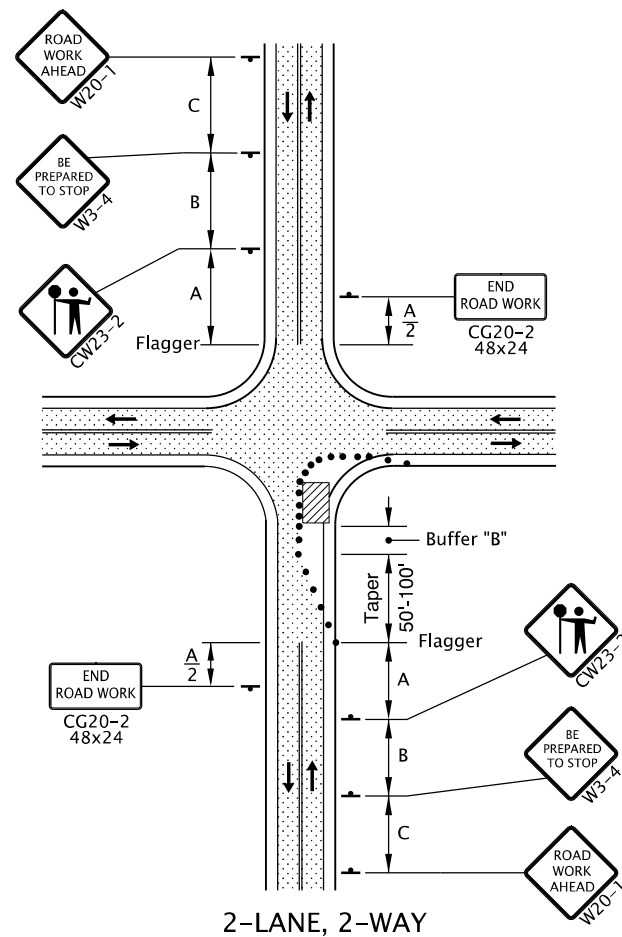


2-LANE, 2-WAY ONE LANE CLOSURE

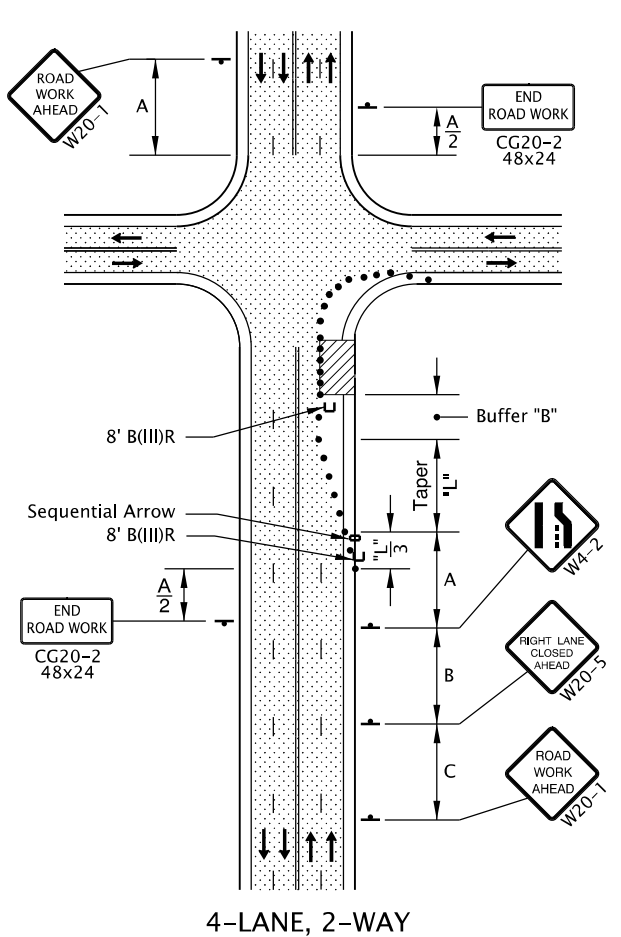

4-LANE, 2-WAY RIGHT LANE CLOSURE, NEAR SIDE

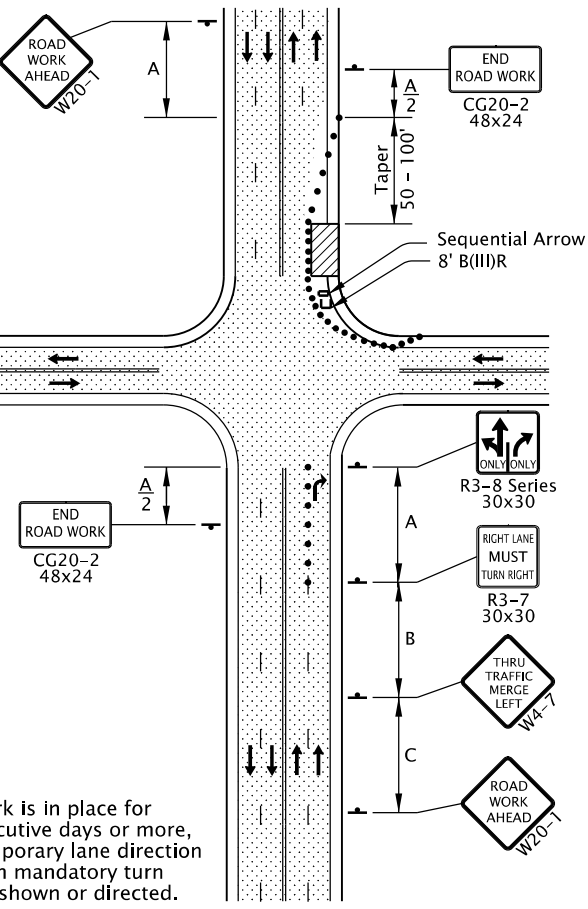

4-LANE, 2-WAY RIGHT LANE CLOSURE, FAR SIDE

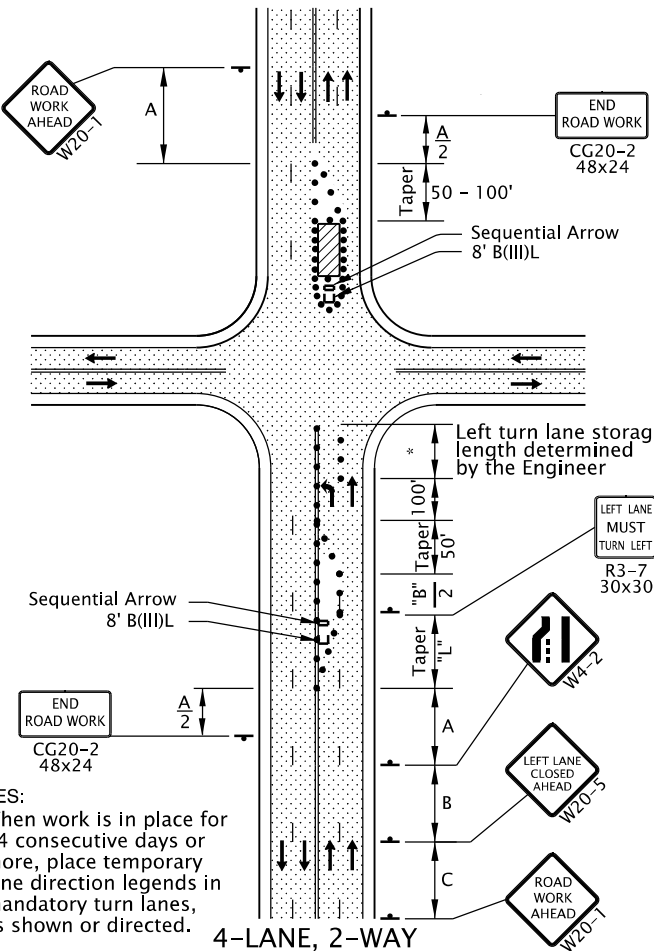

4-LANE, 2-WAY LEFT LANE CLOSURE, FAR SIDE

NOTES:
 • When work is in place for 14 consecutive days or more, place temporary lane direction legends in mandatory turn lanes, as shown or directed.

NOTES:
 • When work is in place for 14 consecutive days or more, place temporary lane direction legends in mandatory turn lanes, as shown or directed.

GENERAL NOTES FOR ALL DETAILS:

- Additional Traffic Control Measures (TCM) may be required for all legs of the intersection.
- The "FLAGGER" (CW23-2) symbol sign shall be used only in conjunction with the "BE PREPARED TO STOP" (W3-4) sign.
- To determine Taper Length ("L") and Buffer Length ("B"), use the "MINIMUM LENGTHS TABLE" on Drg. TM800.
- For left lane or shoulder work, place TCD to close left lane or shoulder. Use "LEFT LANE CLOSED AHEAD" (W20-5) sign, "LEFT LANE ENDS" (W4-2L) symbol sign, or "LEFT SHOULDER CLOSED" (W21-5a) sign, where applicable.
- To determine sign spacing A, B, and C, use "TRAFFIC CONTROL DEVICES (TCD) SPACING TABLE" on Drg. TM800.
- When a through road intersects within the work zone, place a "ROAD WORK AHEAD" (W20-1) sign in advance of the intersection at sign spacing A.
- Use plastic drums in lane closure tapers when the posted speed is 45 mph or greater.
- Where shoulder width is limited, Sequential Arrow may be placed within the lane closure taper.
- Place channellizing devices around intersection radii and construction areas at 10' spacing.
- Install a "BICYCLES ON ROADWAY" (CW11-1) sign in advance of the closure when a bike lane is closed, or when the shoulder is closed and bikes are expected.
- To be accompanied by Drg. Nos. TM820, TM821 & TM840.
- 28" Tubular Markers See TCD Spacing Table on TM800 for max. spacings.
- 28" Tubular Markers See TCD Spacing Table on TM800 for max. spacings.

CALC. BOOK NO. _ _ _ _ _ N/A _ _ _ _ _

BASELINE REPORT DATE _ _ _ _ _ 01-JUL-2019 _ _ _ _ _

NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications

OREGON STANDARD DRAWINGS

INTERSECTION WORK ZONE DETAILS

2018


| DATE | REVISION | DESCRIPTION |
|---------|-----------------|-------------|
| 07-2019 | REVISED DRAWING | |
| | | |
| | | |

The selection and use of this Standard Drawing, while designed in accordance with generally accepted engineering principles and practices, is the sole responsibility of the user and should not be used without consulting a Registered Professional Engineer.

UNDER TRAFFIC
 UNDER CONSTRUCTION


tm850.dgn 01-JAN-2020

- NOTE:
- Continue "LOOSE GRAVEL" (CW8-7a) and "DO NOT PASS" (R4-1) signing throughout the area at spacing shown.
 - Use advisory speed "XX", 15 mph less than the pre-construction posted speed, or as directed. "XX MPH" placard shall not exceed a posted speed of 35 mph.

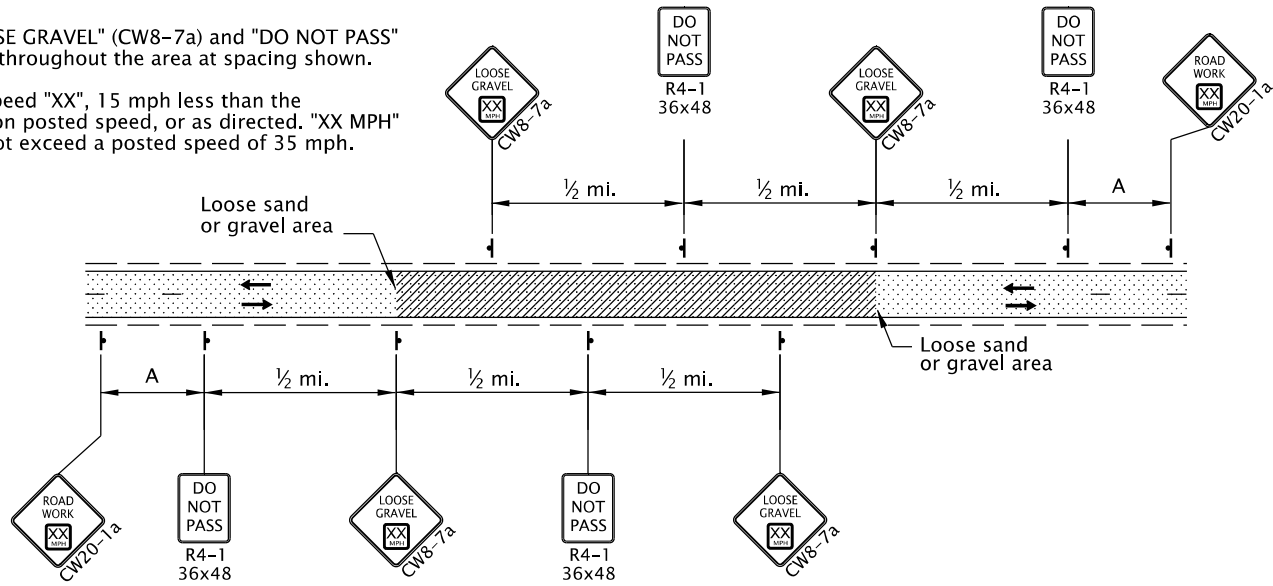


2-LANE, 2-WAY ROADWAY
LOOSE GRAVEL IN ROADWAY SIGNING

- NOTE:
- Continue "ABRUPT EDGE" (CW21-(7,9)) and "DO NOT PASS" (R4-1) signing throughout the area at spacing shown.

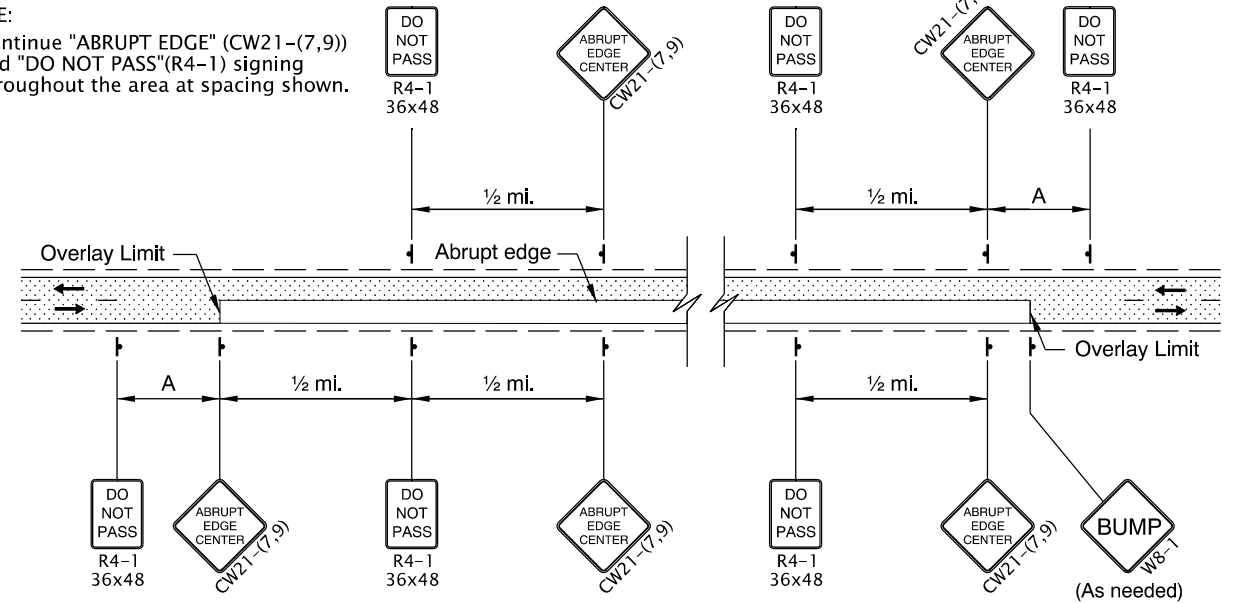


2-LANE, 2-WAY ROADWAY
OVERLAY AREA SIGNING

- NOTES:
- Place Advance Flagger and additional signing when traffic queues extend beyond initial warning signing OR when sight distance is restricted.
 - Relocate initial "ROAD WORK AHEAD" (W20-1) sign in advance of additional "BE PREPARED TO STOP" (W3-4) and Flagger Ahead (CW23-2) signs, as shown.
 - Place additional Tubular Markers for Flagger and Advance Flagger Stations according to FLAGGER STATION DELINEATION detail.

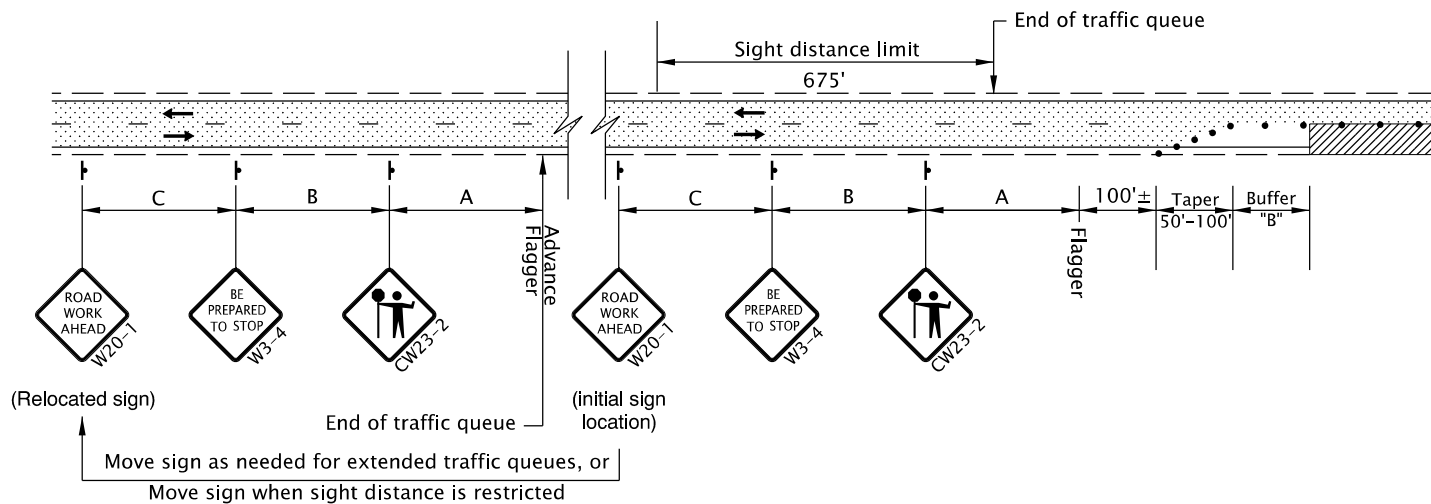

ADVANCE FLAGGER FOR EXTENDED TRAFFIC QUEUES

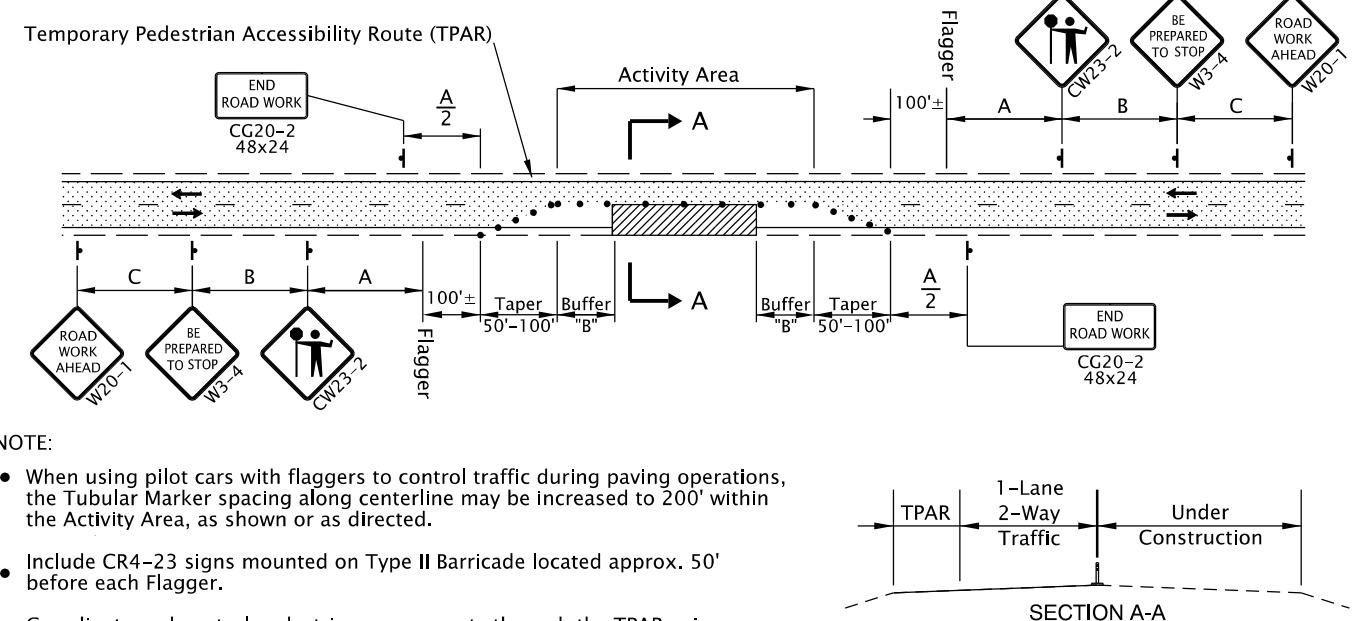

- NOTE:
- When using pilot cars with flaggers to control traffic during paving operations, the Tubular Marker spacing along centerline may be increased to 200' within the Activity Area, as shown or as directed.
 - Include CR4-23 signs mounted on Type II Barricade located approx. 50' before each Flagger.
 - Coordinate and control pedestrians movements through the TPAR using Flaggers, other TCM, or as directed. When the existing shoulder is greater than or equal to 4' wide, provide a minimum of 4' of width for the TPAR.

2-LANE, 2-WAY ROADWAY
ONE LANE CLOSURE


GENERAL NOTES FOR ALL DETAILS:

- The "FLAGGER" (CW23-2) symbol sign shall be used only in conjunction with the "BE PREPARED TO STOP" (W3-4) sign.
- Cover existing passing zone signing, as directed.
- Install temporary striping as required.
- To determine Taper Length ("L") and Buffer Length ("B"), use the "MINIMUM LENGTHS TABLE" shown on Drg. No. TM800.
- To determine sign spacing A, B, and C, use "TRAFFIC CONTROL DEVICES (TCD) SPACING TABLE" on Drg. No. TM800.
- Install a "BICYCLES ON ROADWAY" (CW11-1) sign in advance of the closure when a bike lane is closed, or when the shoulder is closed and bikes are expected.
- To be accompanied by Drg. Nos. TM821.

- • • • • 28" Tubular Markers on 20' max. spacing for flagger tapers and stations
- • • 28" Tubular Markers See TCD Spacing Table on TM800 for max. spacing.

- UNDER TRAFFIC
- UNDER CONSTRUCTION
- CONSTRUCTION UNDER TRAFFIC

- NOTE:
- Use a minimum of 3 tubular markers in shoulder taper on 10' spacing for flagger station delineation.

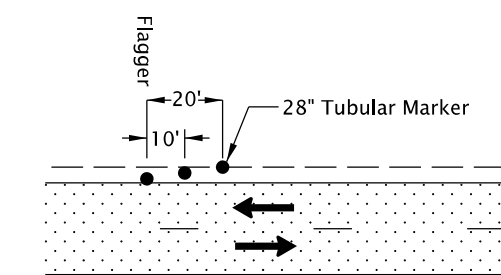

FLAGGER STATION DELINEATION

CALC. BOOK NO. _____ N/A _____

BASELINE REPORT DATE _____ 01-JAN-2020 _____

NOTE: All material and workmanship shall be in accordance with the current Oregon Standard Specifications

OREGON STANDARD DRAWINGS

2-LANE, 2-WAY ROADWAYS

2018

| DATE | REVISION | DESCRIPTION |
|---------|---------------------------|-------------|
| 01-2018 | REVISED DRAWING AND NOTES | |
| 01-2020 | REVISED NOTES | |

TM850